


LED Emergency Exit Sign

NR-EXS101 Series


IP20




Indoor 	AC 220-240V	50/60 Hz	PF ≥0.5	CCT 6500K	Ra ≥80	IP20	Beam Angel 360°	Charging Time ≤24h	Chips SMD	
------------	----------------	-------------	------------	--------------	-----------	------	-----------------------	--------------------------	--------------	--

Item Code	P(W)	Total Lumen	Emergency Duration	Dimensions in mm			
				A	B	C	
NR-EXS101-4.5W-3H	4.5	40	≥3h	316	229	41.5	0.57

Dimensions in mm

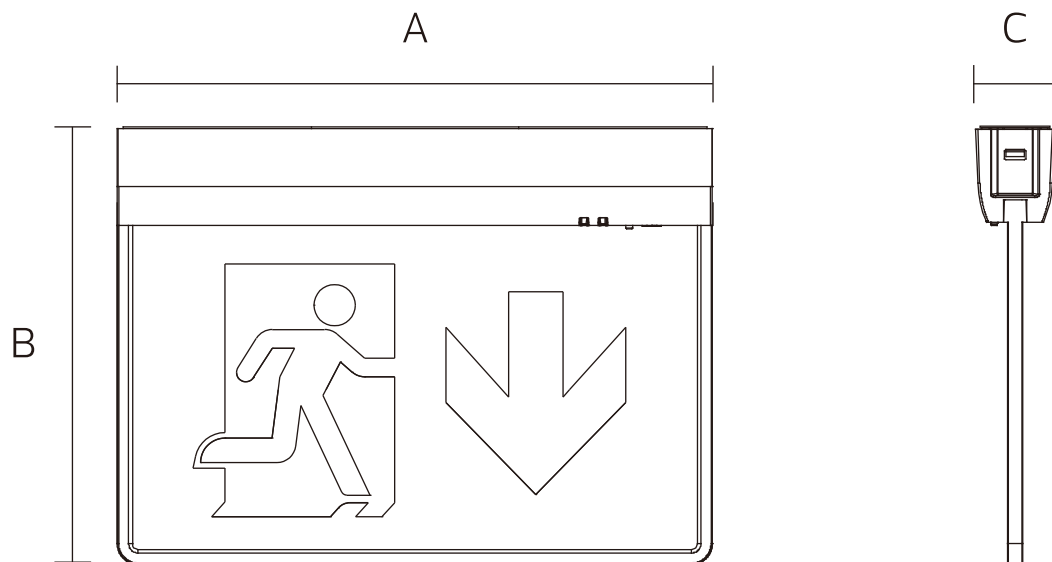


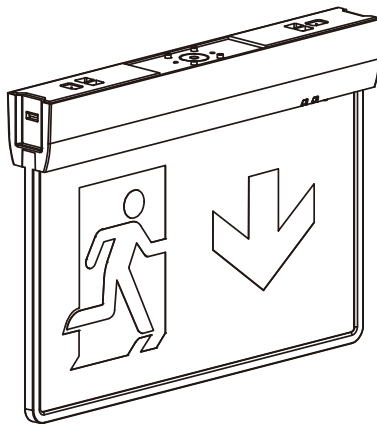


Description:
LED Emergency Exit Sign


Main material:
Engineering plastics+glass

Specification
Energy saving, up to 85% energy saving
comparing to standard halogen and incandescent
lamps
High quality light, high color rendering, less heat,
no UV or IR radiation
Build-in LED Driver
IP20

Applications
.Shoping mall
.Hotels
.Exhibition hall
.Art hall
.Museums

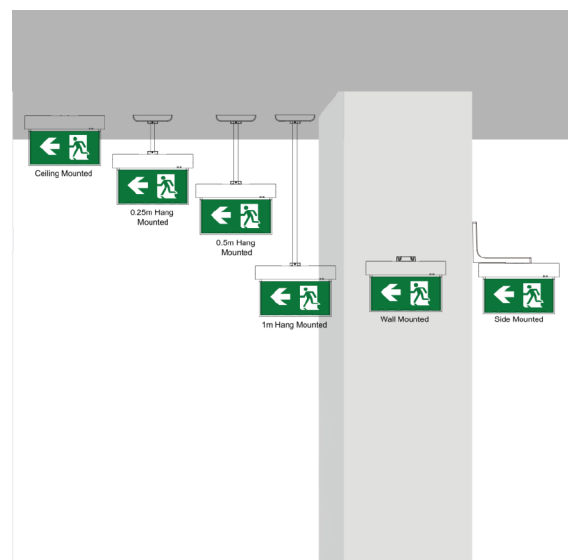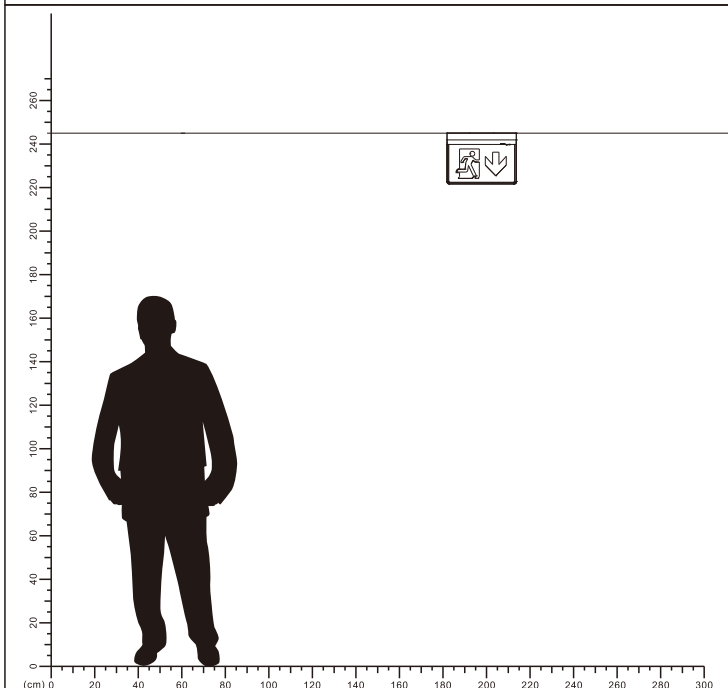


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

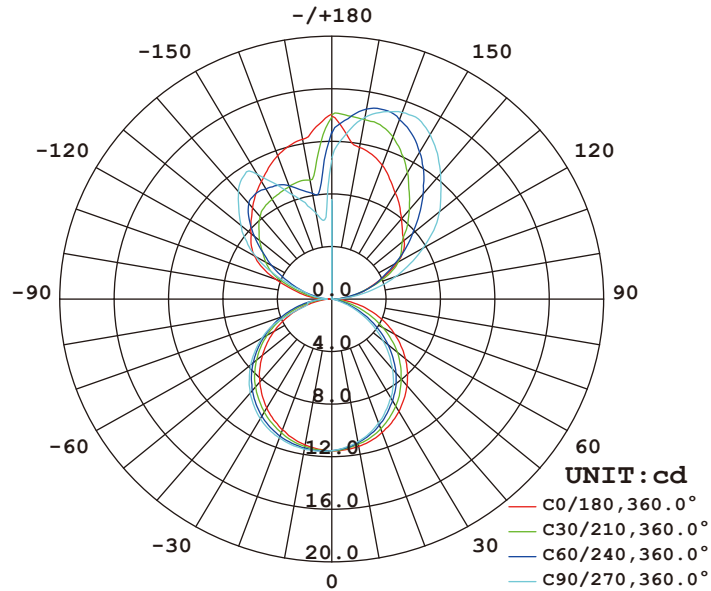





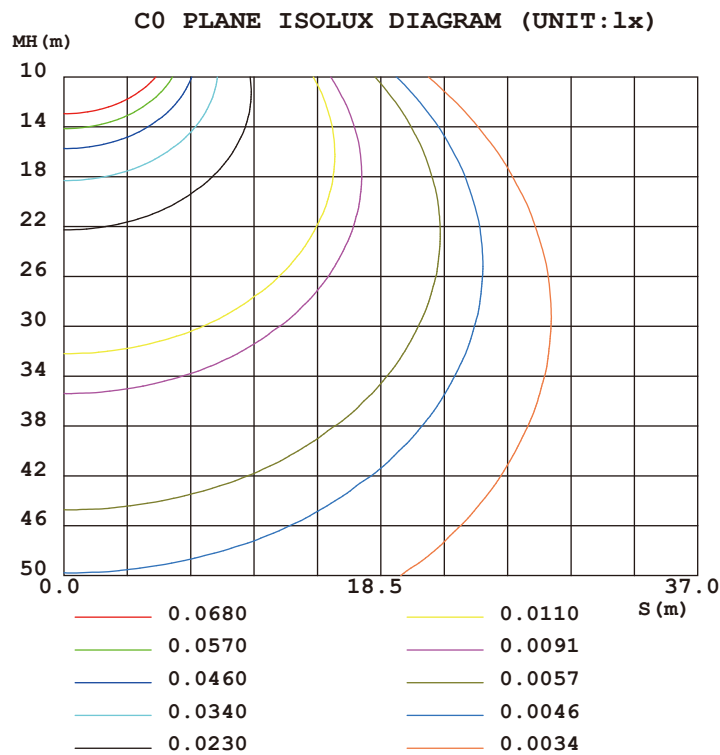


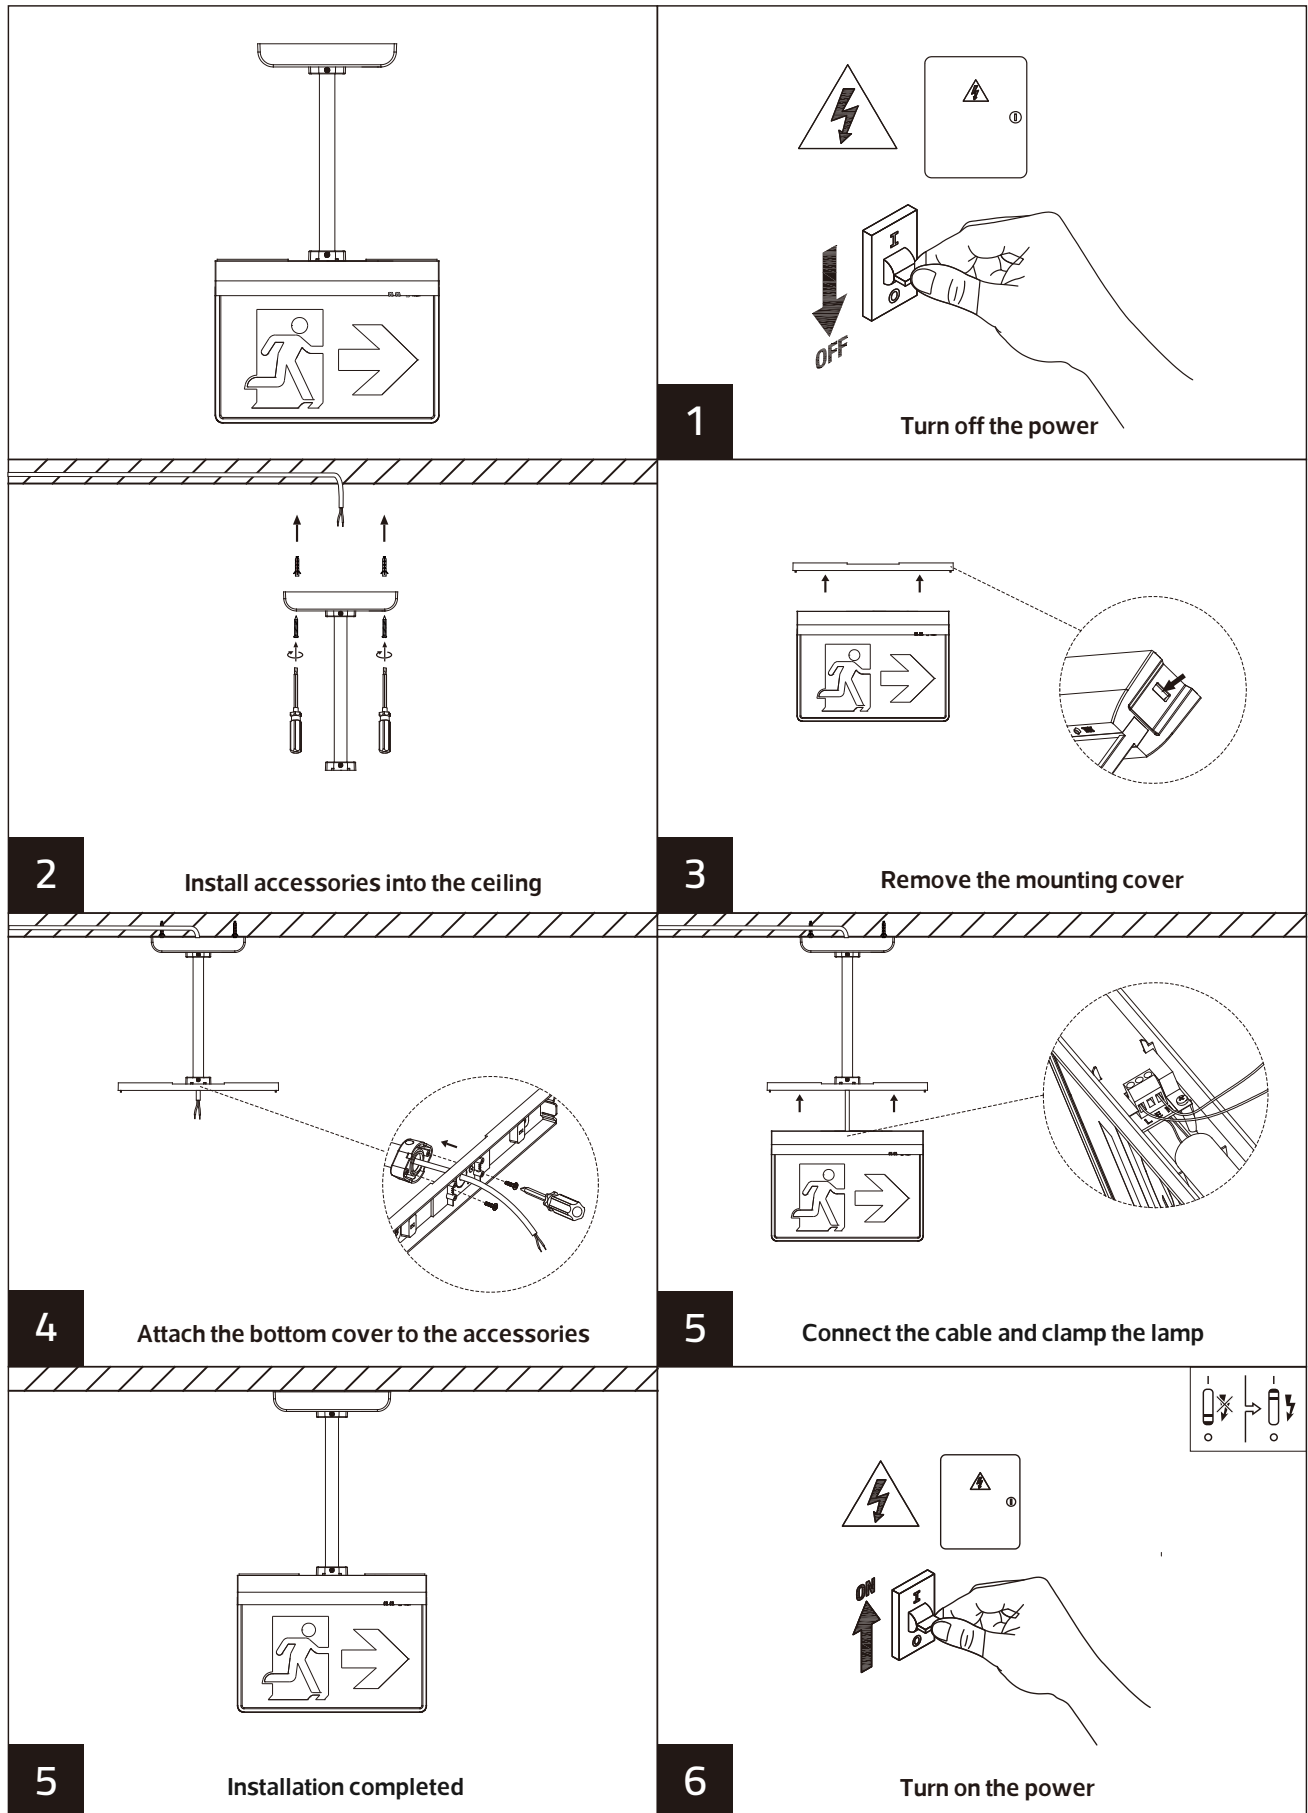
AVERAGE BEAM ANGLE (50%) : 360.0 DEG


Illuminance at a Distance



Accessories


Picture	Item Code	Size	
	Hange- 1M-ACS-WH	1030*180*55	0.27
	Hange- 0.5M-ACS-WH	535*180*55	0.13
	Hange- 0.25M-ACS-WH	283*180*55	0.12
	NR-EXS101-FRAME	375*85*40	0.13
	Side-ACS-WH	225*35*155	0.05
	Wall-ACS-WH	100*50*25	0.04



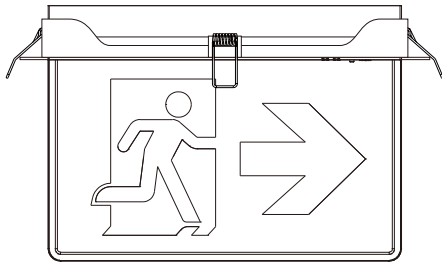


1

Turn off the power

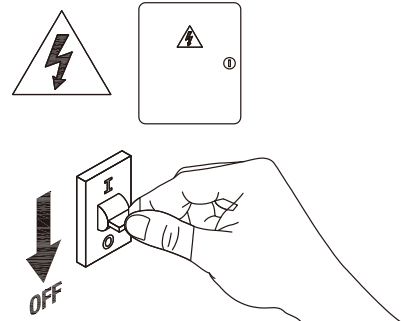


2

Cut a hole in the ceiling




3

Remove the mounting cover

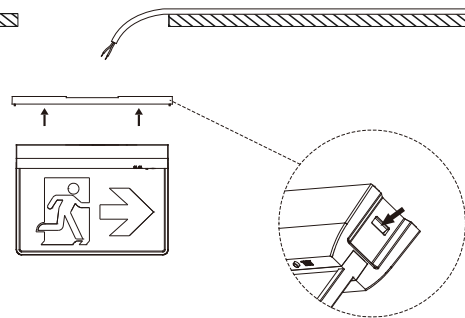


4

Connect the cable and clamp the lamp

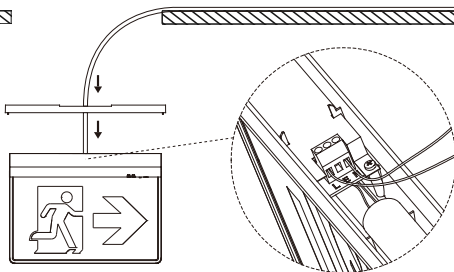


5

Put the lamp in the attachment





5


Stuck in ceiling and installed

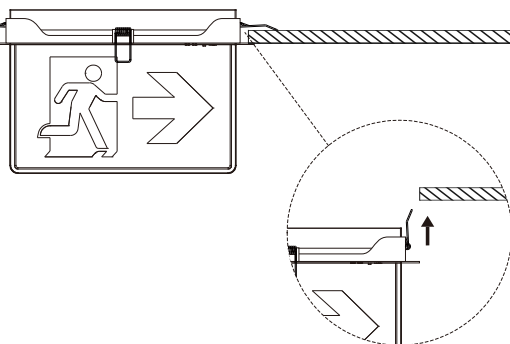

6



Turn on the power



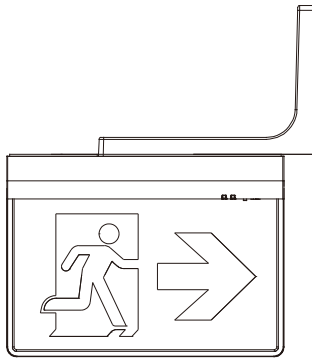


1

Turn off the power

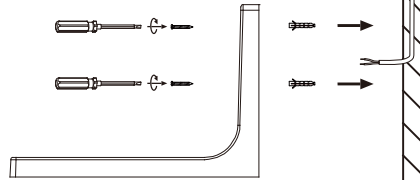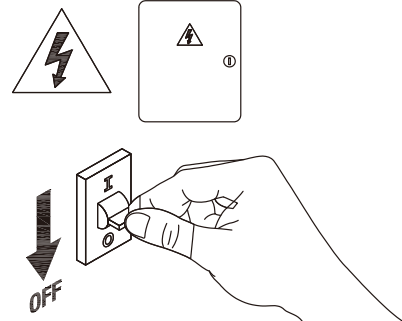


2

Install accessories into the ceiling

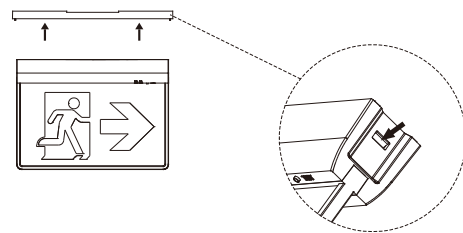


3

Remove the mounting cover




4

Attach the bottom cover to the accessories




5

Connect the cable and clamp the lamp



5


Installation completed



6



Turn on the power






1

Turn off the power

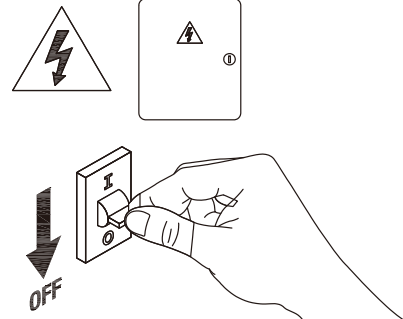


2

Install accessories into the ceiling

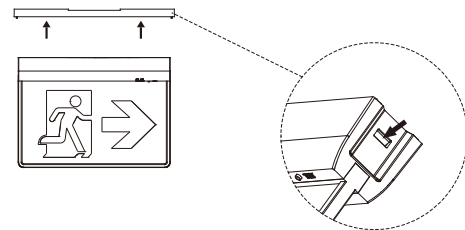


3

Remove the mounting cover

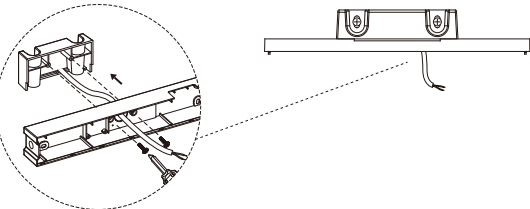


4

Attach the bottom cover to the accessories

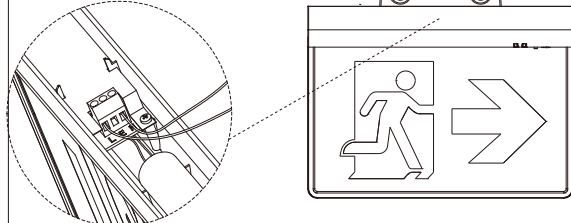


5

Connect the cable and clamp the lamp



5

Installation completed



6

Turn on the power

