


LED Outdoor Lamp

B1009



IP65


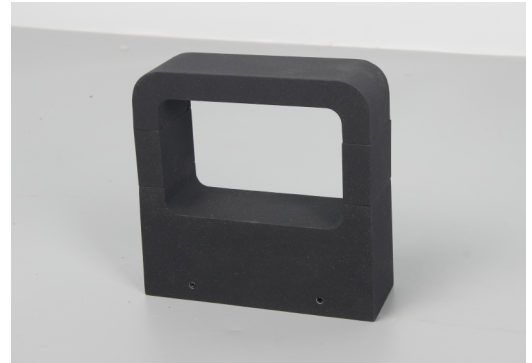


Outdoor	AC 220-240V	50/60 Hz	PF ≥0.7	CCT 3000K	Ra ≥80	IP65	Beam Angel 240°	Chips COB	
---------	----------------	-------------	------------	--------------	-----------	------	-----------------------	--------------	--

Item Code	P (W)	CCT (K)	Beam angle	Output (lm)	lm/w	Dimensions in mm			
A	B	C							kg
B1009	7	3000	240°	154	22	160	53	160	0.86

Dimensions in mm

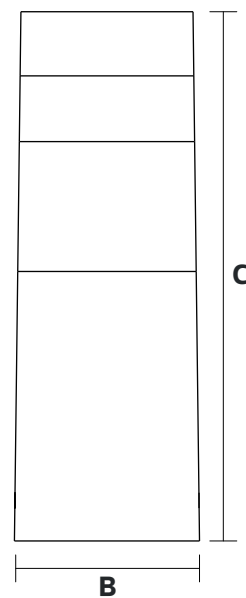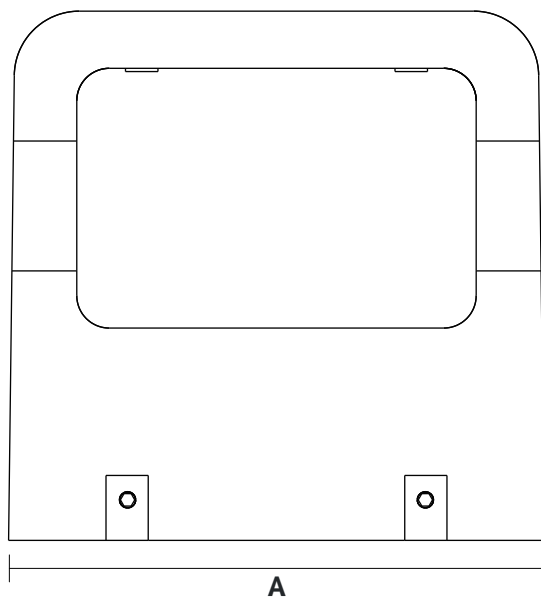

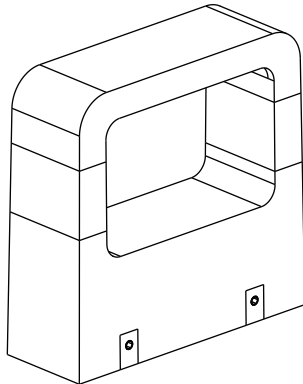
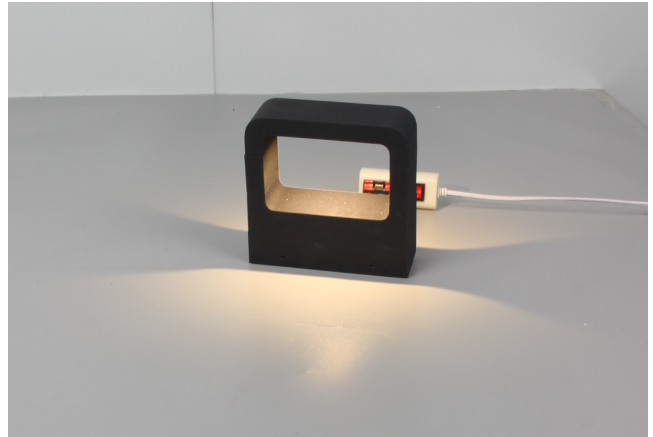


Description:
LED Outdoor Lamp


Main material:
Die-cast aluminum+ glass cover

Specification
Energy saving, up to 85% energy saving
comparing to standard halogen and incandescent
lamps
High quality light, high color rendering, less heat,
no UV or IR radiation
Build-in LED Driver
IP65

Applications
. Park
. Square
. Tourist attraction
. Corridor

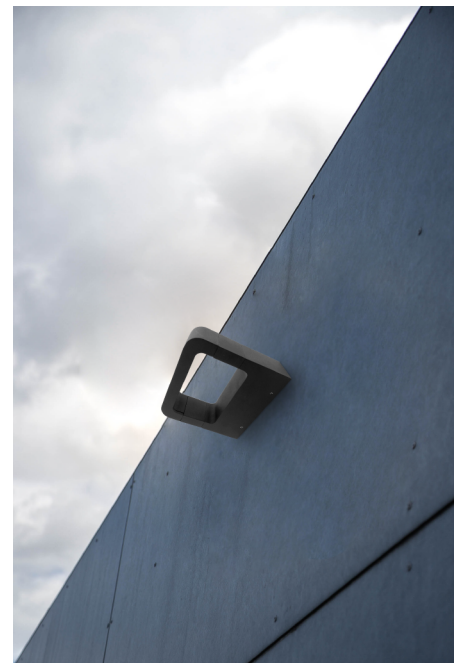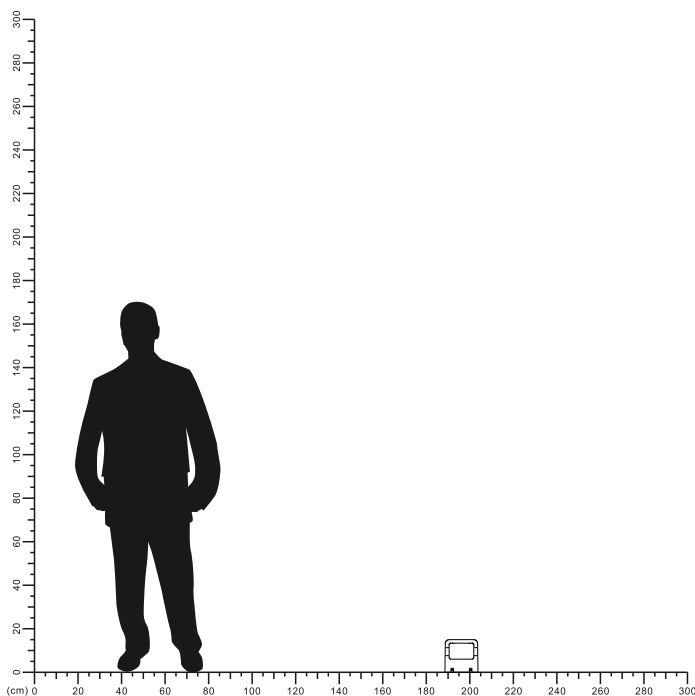

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

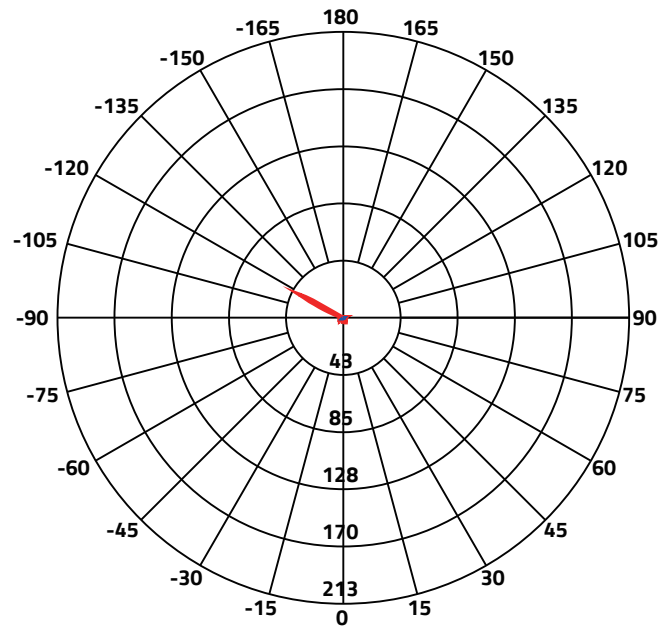

Beam Angle(50%) C0-180,C90-270: 238.4 deg,34.5 deg

C0-180 — C90-270 —

Illuminance at a Distance

