

LED Outdoor Wall Lamp

B1010 Series



IP65




Outdoor 	AC 220-240V	50/60 Hz	PF ≥0.7	CCT 3000K	Ra ≥90	IP65	Beam Angel 60°	Chips COB	
--------------------	-----------------------	--------------------	-------------------	---------------------	------------------	-------------	--------------------------	---------------------	--

Item Code	P (W)	CCT(K)	Beam angle	Output (lm)	lm/w	Dimensions in mm			
						A	B	C	
B1010-1	10	3000	60°	650	65	108	94	112	0.45
B1010-2	20	3000	180°	1600	80	198	94	112	1.12

Dimensions in mm

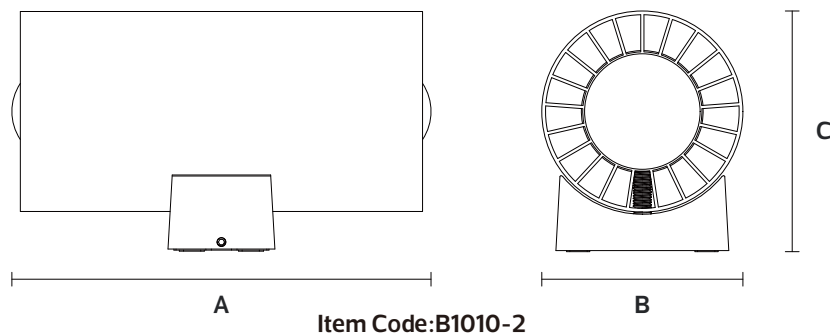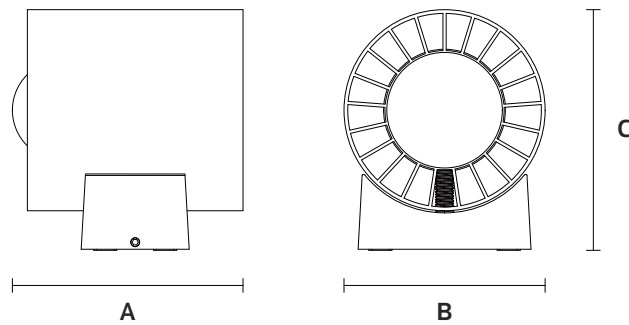

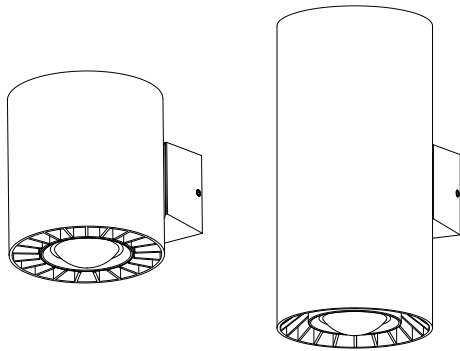


Description:
LED Outdoor Wall Lamp


Main material:
Aluminum+Toughened glass

Specification
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rendering, less heat, no UV or IR radiation
Build-in LED Driver
IP65

Applications
• Park
• Square
• Tourist attraction
• Corridor

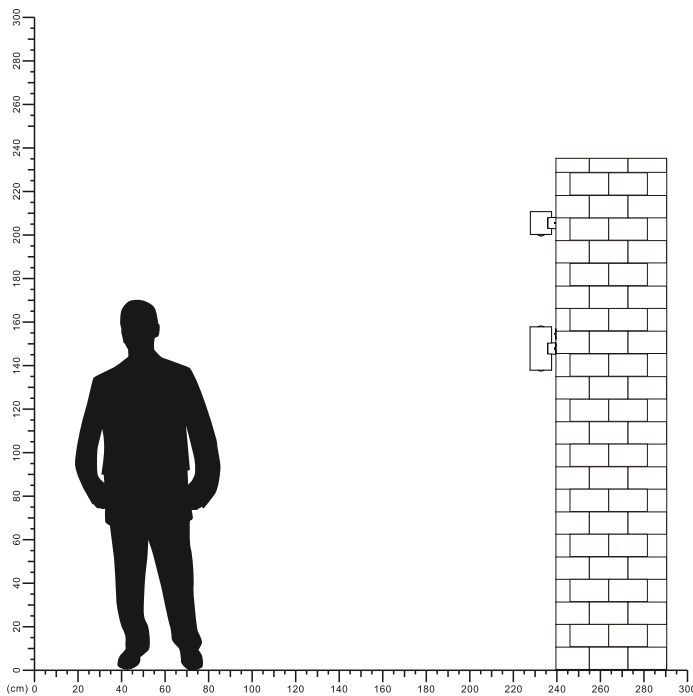


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

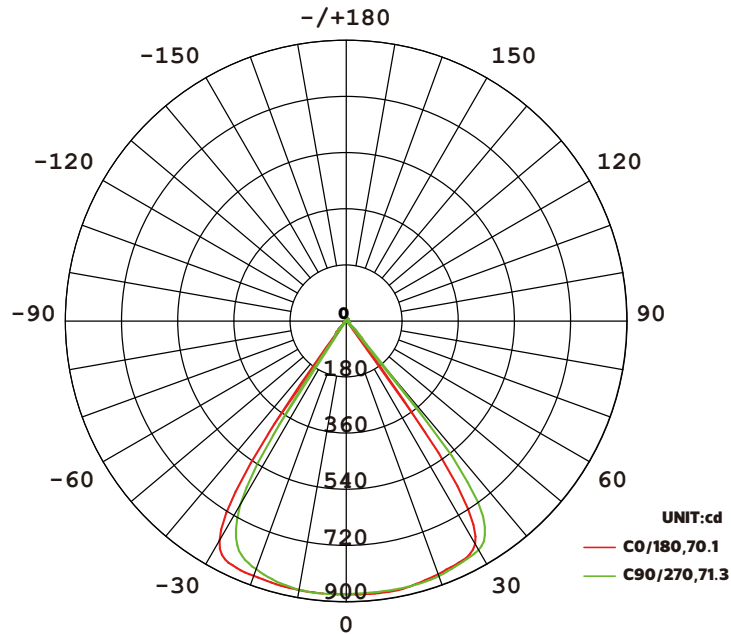

AVERAGE BEAM ANGLE (50%) : 70.7 DEG


Illuminance at a Distance

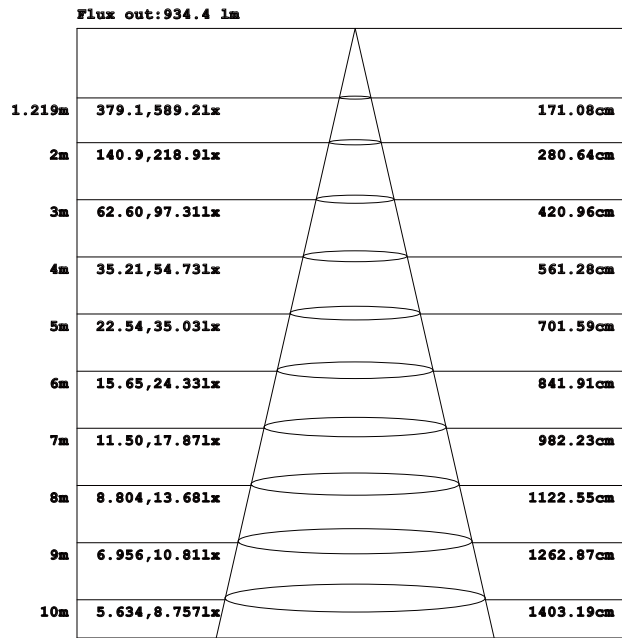

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


Item Code: B1010-1

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

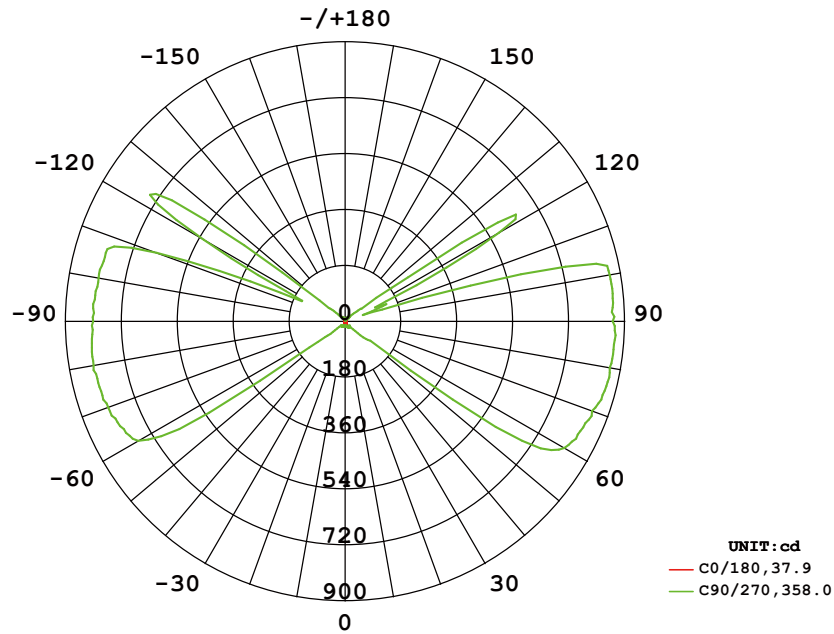









AVERAGE BEAM ANGLE (50%) : 198.0 DEG

Illuminance at a Distance

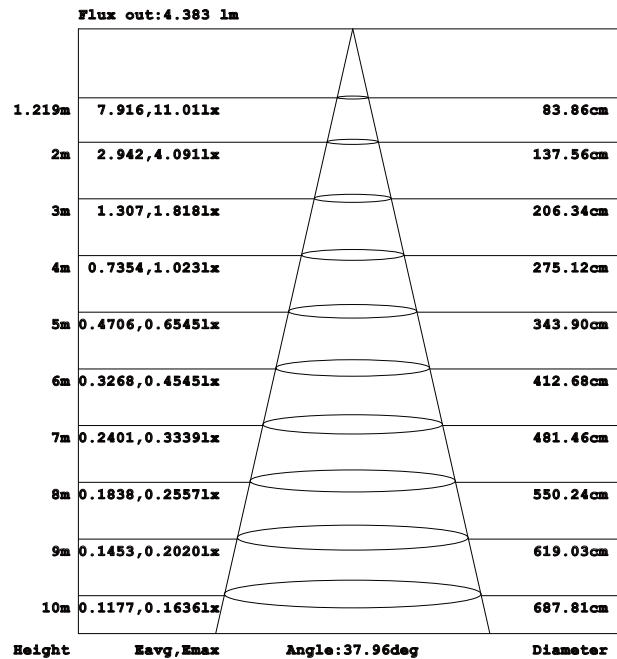

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Item Code: B1010-2

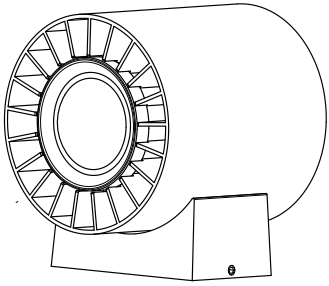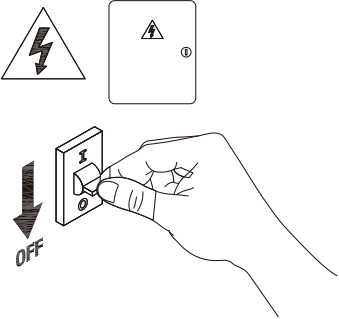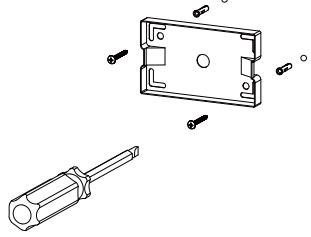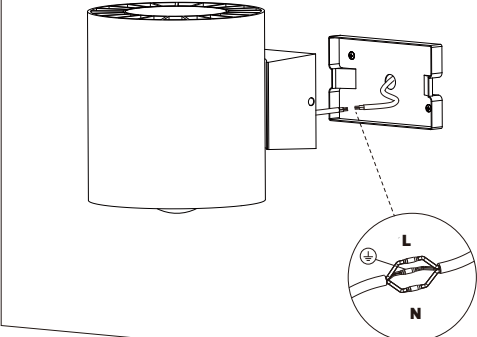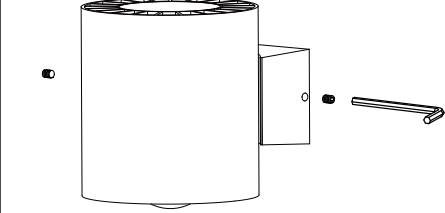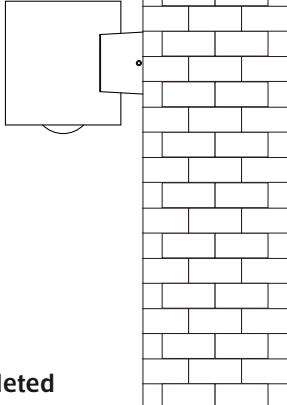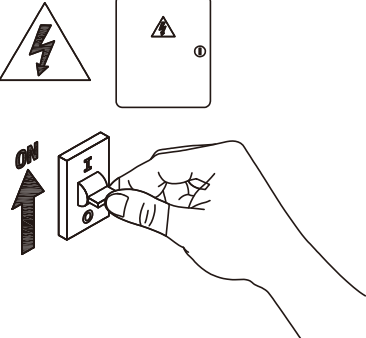 <p>1</p>	 <p>2 Turn off the power</p>
 <p>3 Drill two screw holes on the wall</p>	 <p>4 Install the base plate</p>
 <p>5 Connect the cable</p>	 <p>6 fixing the lamp body.</p>
 <p>5 Installation completed</p>	 <p>6 Turn on power</p>

