




LED OUTDOOR BURIED LAMP

CP7024 Series
IP67




Item Code	P (W)	CCT (K)	Beam angle	Output (lm)	lm/w	Hole Size (mm)	Dimensions in mm		kg
							A	B	
CP7024-1	2	3000	180°	30	15	Φ50	Φ51.5	91	0.155
CP7024-2	2	3000	180°	30	15	Φ50	Φ51.5	91	0.155
CP7024-3	2	3000	90°	30	15	Φ50	Φ51.5	91	0.155


Dimensions in mm




Model:CP7024-1




Model:CP7024-2



Model:CP7024-3

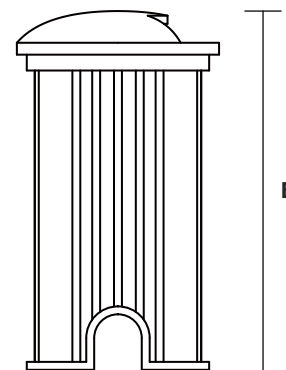

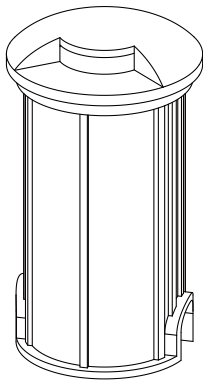


Description:
LED OUTDOOR BURIED LAMP


Main material:
Aluminum+Engineering plastics

Specification
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rendering, less heat, no UV or IR radiation
Build-in LED Driver
IP67


Applications
. Park
. Square
. Tourist attraction
. Corridor

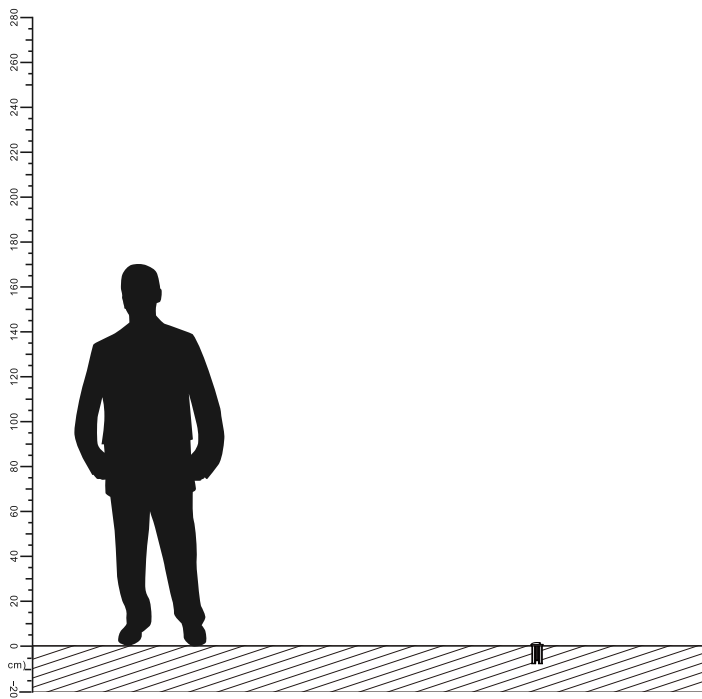


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

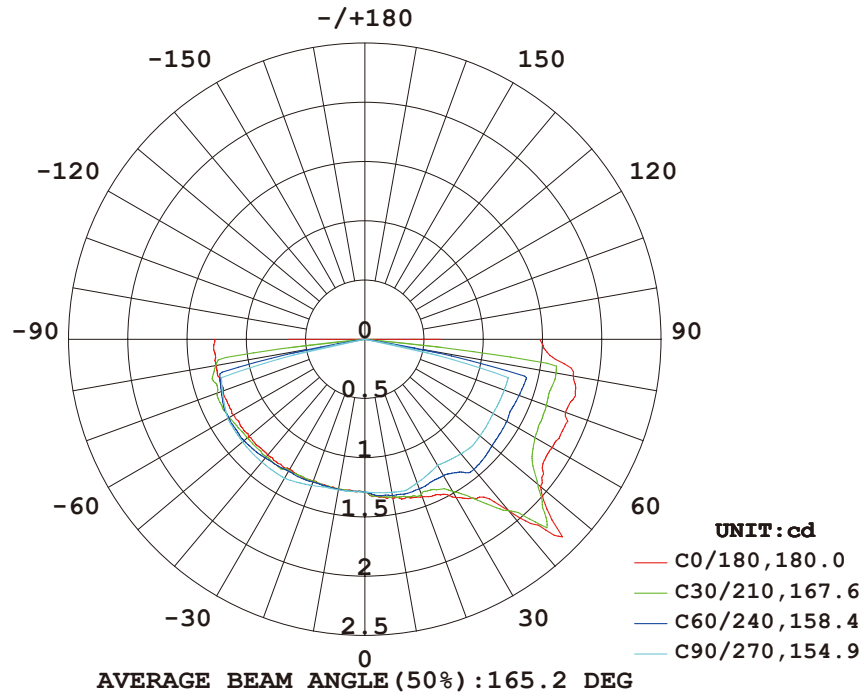


Illuminance at a Distance

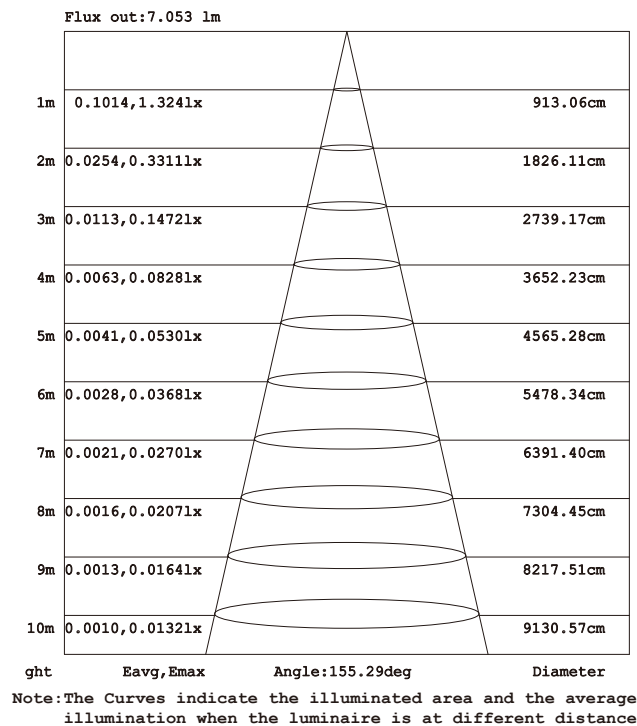


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

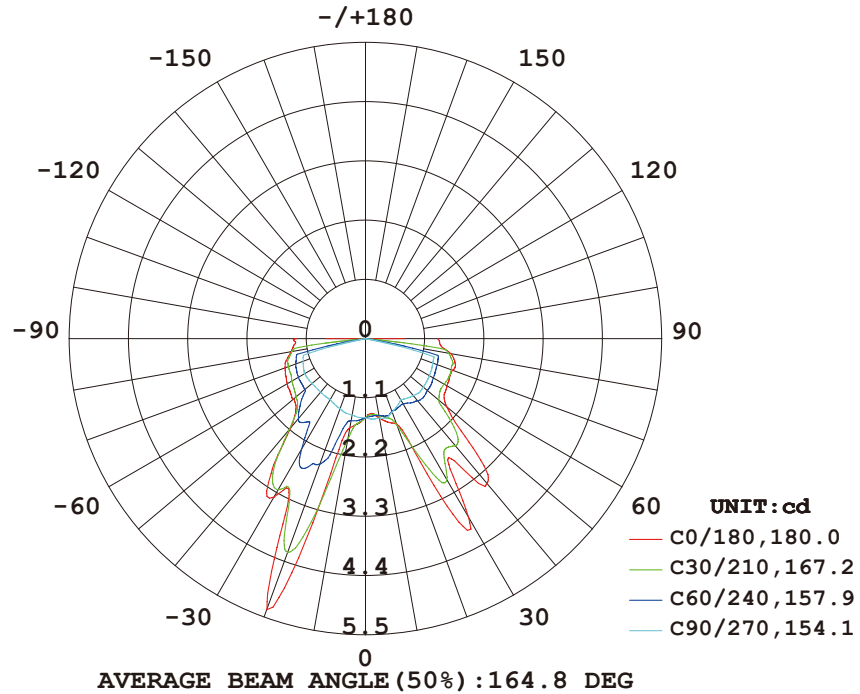


Illuminance at a Distance

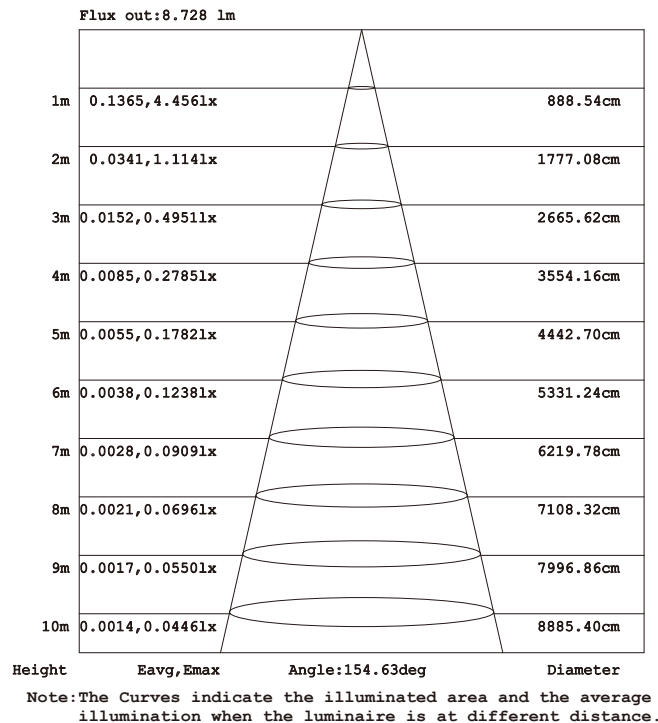



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

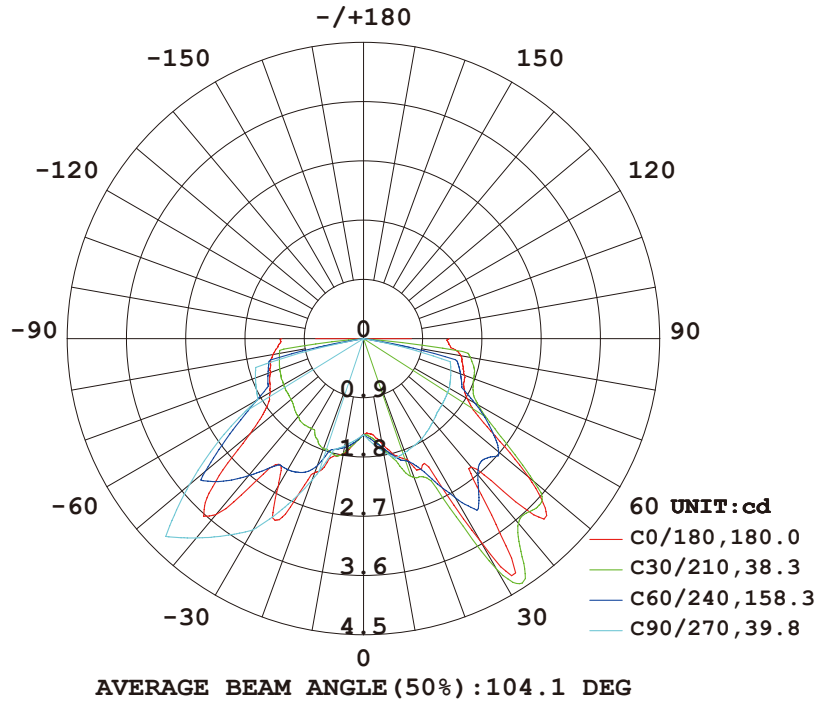

Illuminance at a Distance


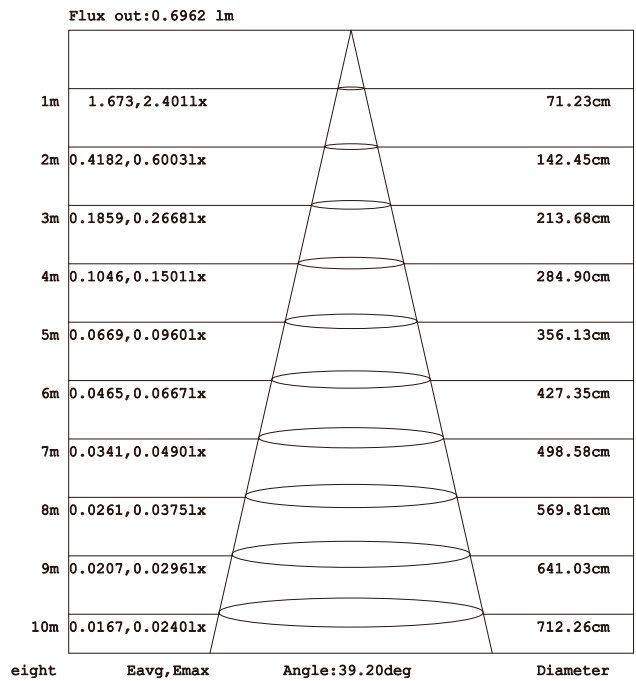


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

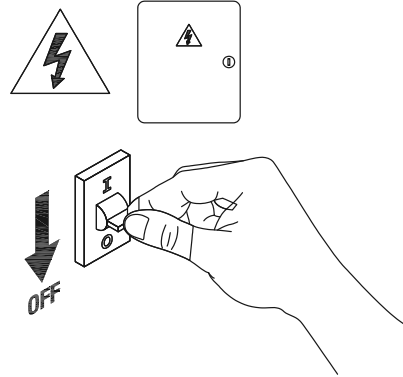

1

Turn off The Power

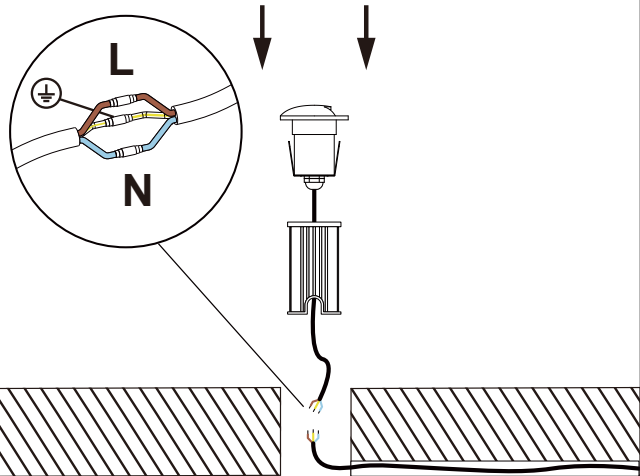

2

Opening holes on the ground


3

Connect the cable



4

Installation completed

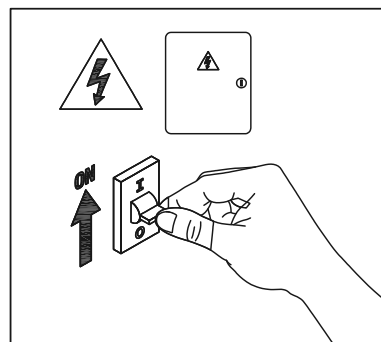

5

Turn on the power

