

## LED OUTDOOR BURIED LAMP


CP7027-120 series  
IP65




<b>Outdoor</b> 	<b>AC</b> 220-240V	<b>50/60</b> Hz	<b>PF</b> ≥0.7	<b>CCT</b> 3000K	<b>Ra</b> ≥80	<b>IP65</b>	<b>Beam Angel</b> 15°/120°	<b>Chips</b> SMD	
--------------------	-----------------------	--------------------	-------------------	---------------------	------------------	-------------	-------------------------------	---------------------	--

Item Code	P (W)	Beam angle	Output (lm)	lm/w	Hole Size (mm)	Dimensions in mm A B		kg
CP7027-120-1	6	15°	30	5	Φ120mm	Φ120	100	0.80
CP7027-120-2	6	200°	30	5	Φ120mm	Φ120	100	0.68
CP7027-120-4	6	200°	30	5	Φ120mm	Φ120	100	0.69


### Dimensions in mm

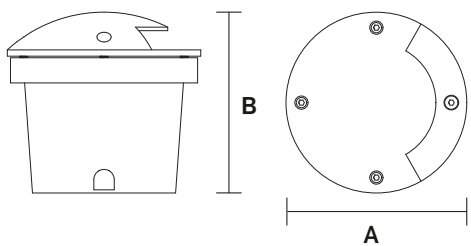


CP7027-120-1

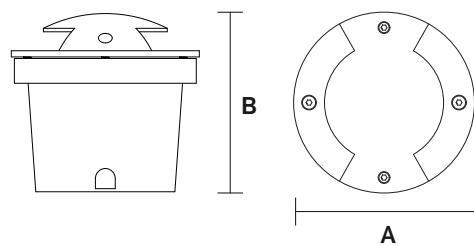

CP7027-120-2

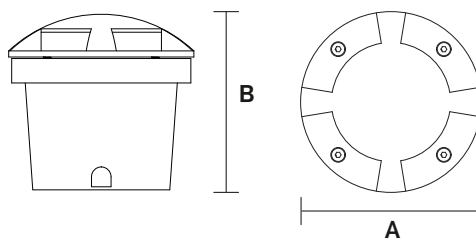

CP7027-120-4

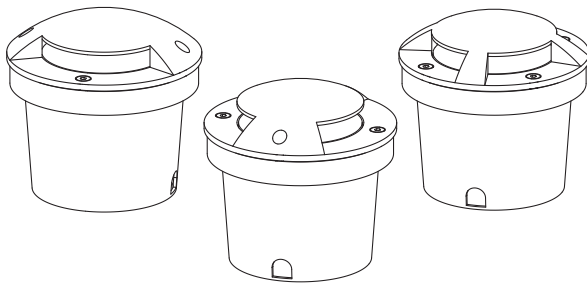



**Description:**  
LED Outdoor Buried Lamp

**Main material:**  
304 stainless steel + Engineering plastics


**Specification**  
Aviation aluminum shell, no corrosion, no rust, Glass lens, natural light without light spot, The base is firmly fixed and will not fall over  
IP 65

**Applications**  

- . Park
- . Square
- . Corridor

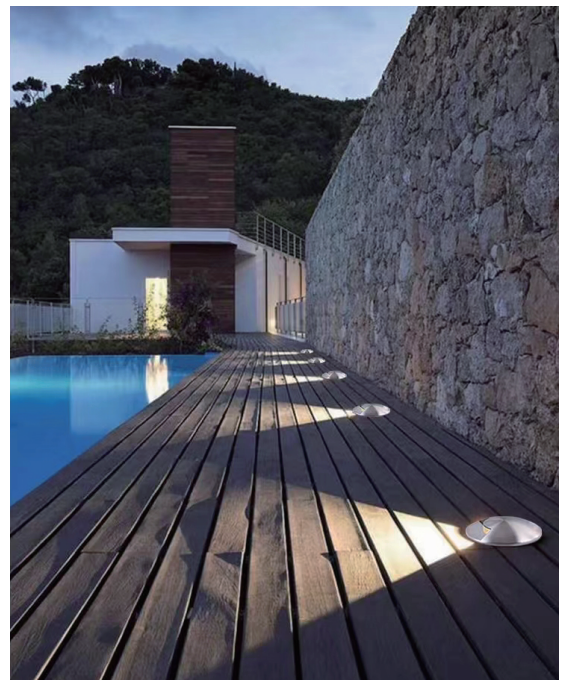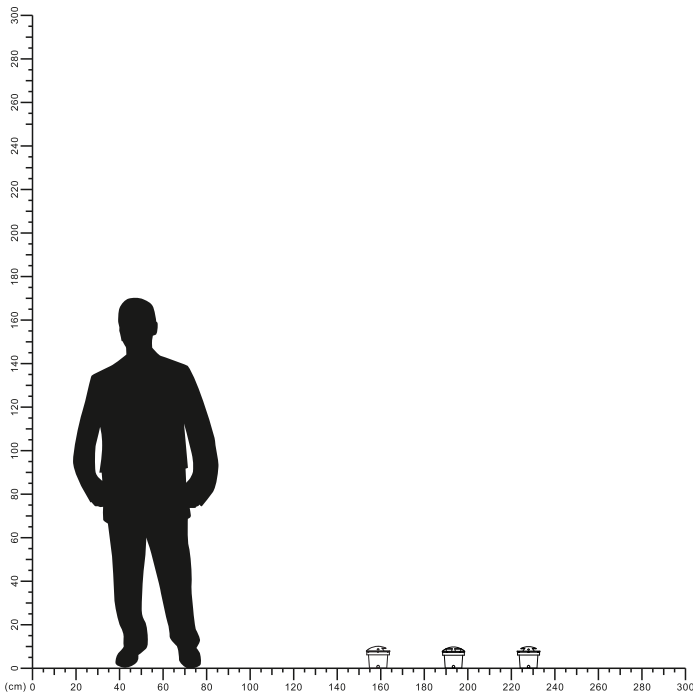


# LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

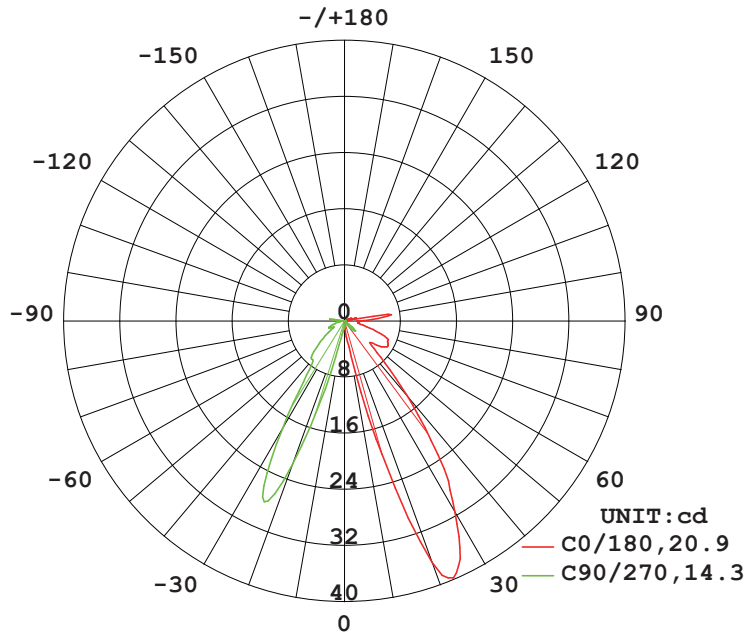


**AVERAGE BEAM ANGLE (50%) : 17.6 DEG**

## Illuminance at a Distance

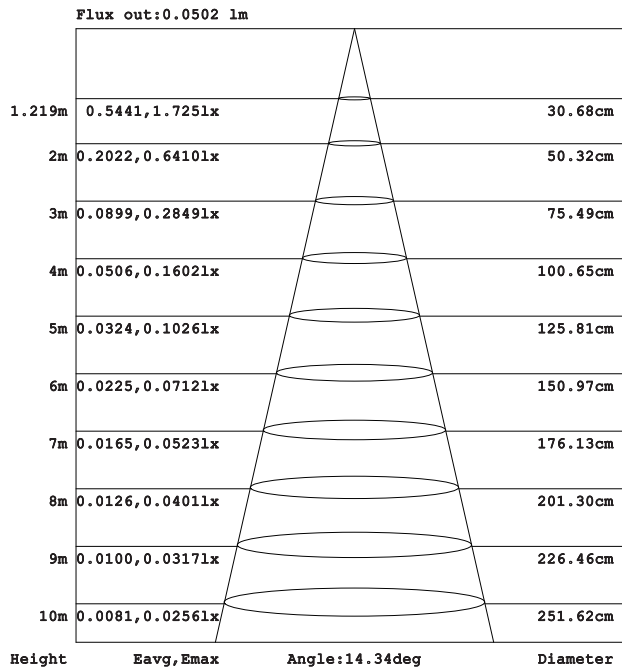


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

# LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

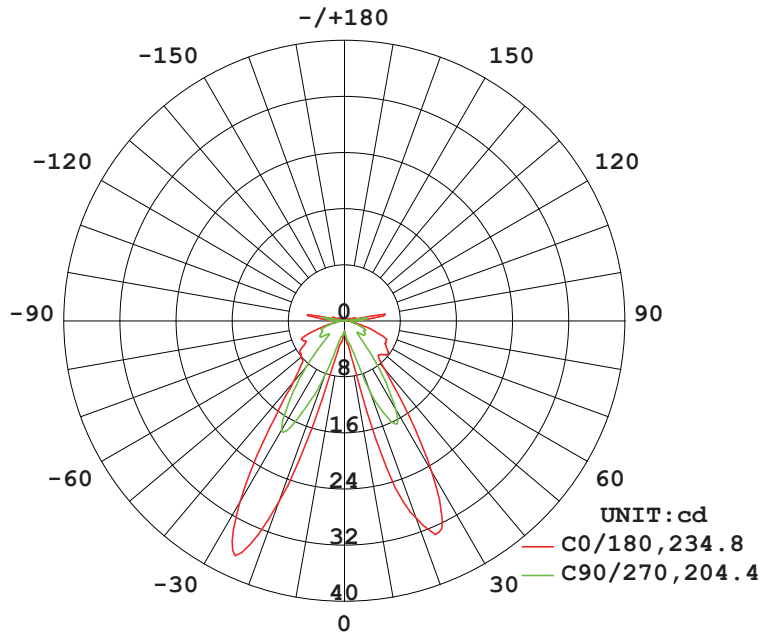


**AVERAGE BEAM ANGLE (50%) : 219.6 DEG**

## Illuminance at a Distance

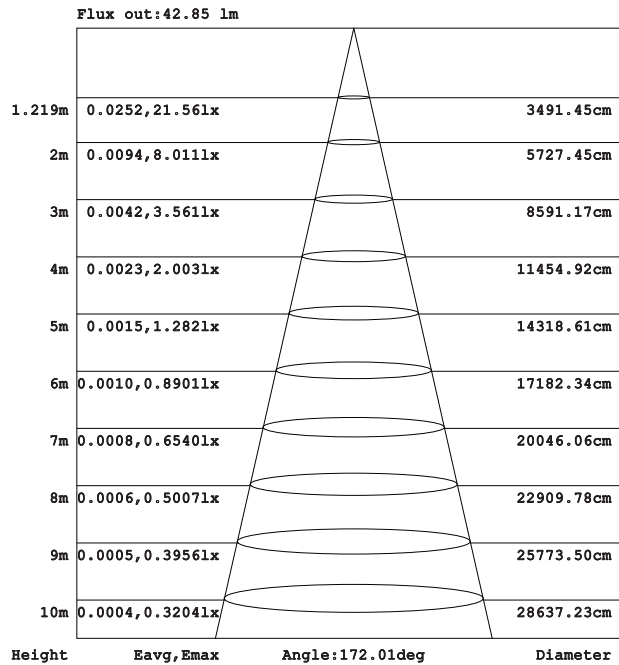


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

# LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

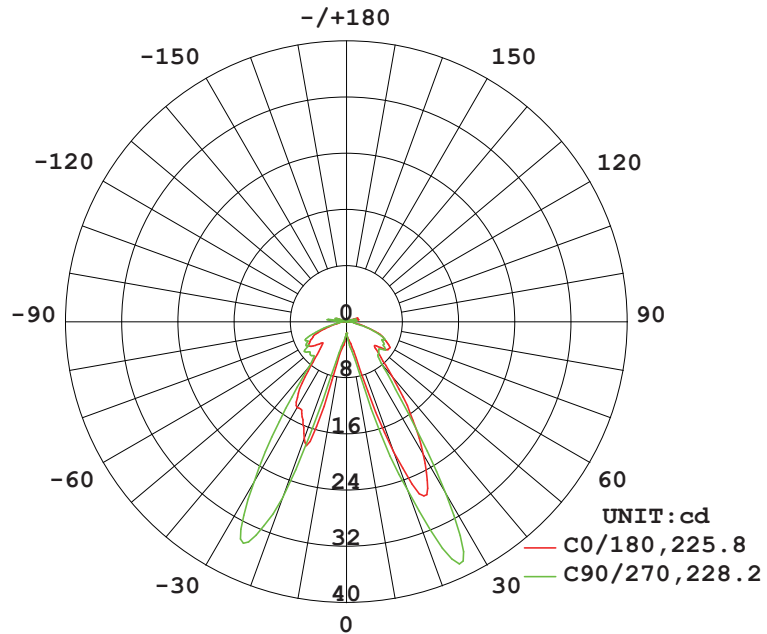

**AVERAGE BEAM ANGLE (50%) : 227.0 DEG**

## Illuminance at a Distance

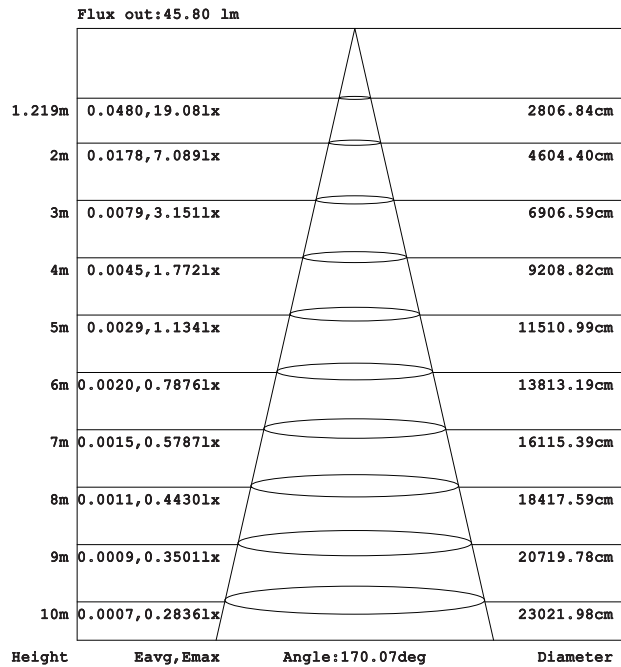

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

