




## LED COB STRIP LIGHT

NR-ST220-COB-IP65-9W Series  
IP65



| Item Code                  | Body Size | Input Voltage | Watt/M | Lm/M  | Max. Length | Beam Angle | CCT   |
|----------------------------|-----------|---------------|--------|-------|-------------|------------|-------|
| NR-ST220-COB-IP65-9W-3000K | W12x6mm   | AC200-240V    | 9W     | 666lm | 50m         | 120°       | 3000K |
| NR-ST220-COB-IP65-9W-4000K | W12x6mm   | AC200-240V    | 9W     | 666lm | 50m         | 120°       | 4000K |

### Dimensions in mm

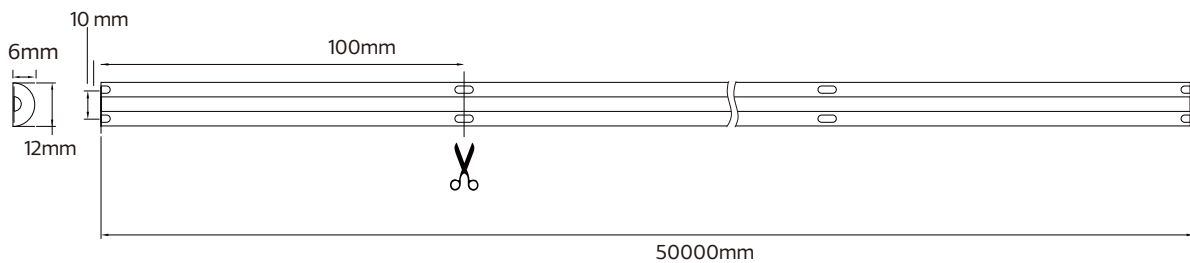





**Product Features:**

- Stable output
- No stroboscopic
- anti-interference
- IP65
- Stable power supply, longer life




| NO | Item Code                 | power | Input Voltage      | PF     | Output        | Size             | Matching series             |
|----|---------------------------|-------|--------------------|--------|---------------|------------------|-----------------------------|
| 1  | NR-DR220-FliKer-150W-IP65 | 150W  | AC220-240V 50/60Hz | PF≥0.9 | 226V 0.63A DC | L119xW31.5xH29mm | NR-ST220-COB-IP65-9W Series |
| 2  | NR-ST220-CONNECT-IP65     | 250W  | AC220-240V 50/60Hz | PF≥0.9 | 226V 1.10A DC | L145.8xW42xH33mm | NR-ST220-COB-IP65-9W Series |


**Accessory**

| Picture   | Item Code                    |
|---|------------------------------|
|  | <b>NR-ST220-POWER-IP65</b>   |
|  | <b>NR-ST220-CAP-IP65</b>     |
|  | <b>NR-ST220-BRACKET-IP65</b> |
|  | <b>PVC-CONNECT-GLUE</b>      |

# LED Strip Solution

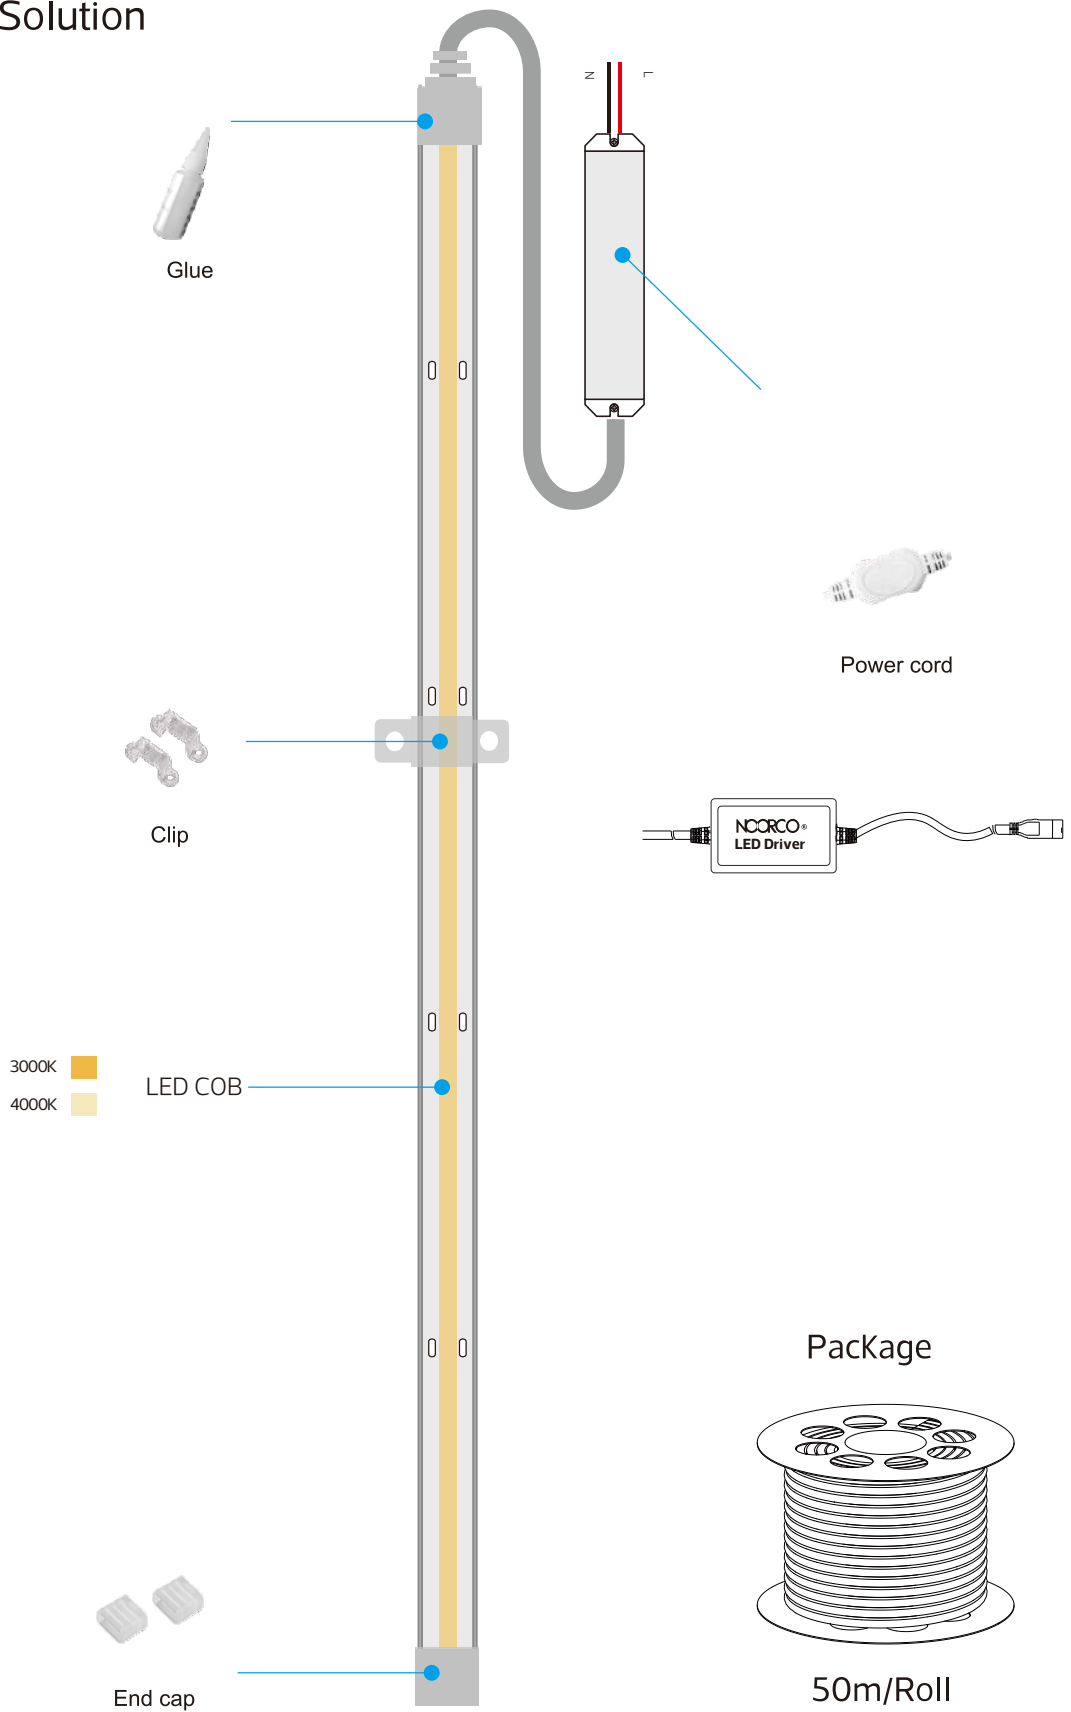


# LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

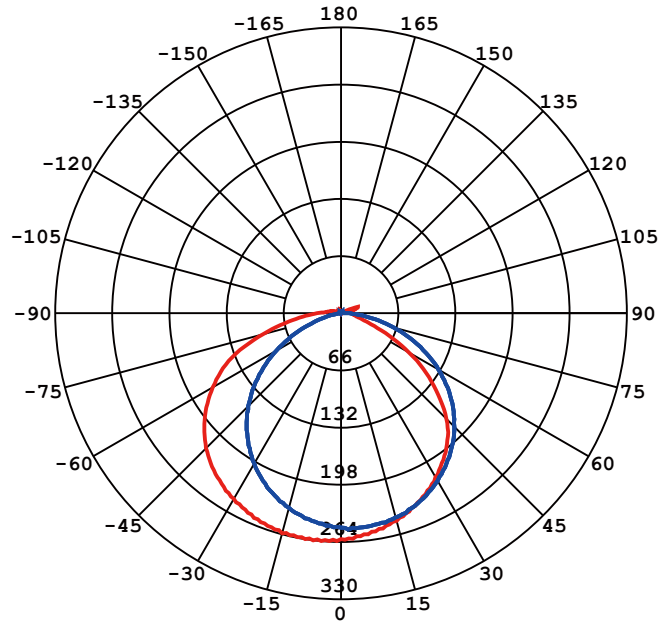

Beam Angle(50%) C0-180,C90-270: 121.4 deg,112.7 deg

C0-180 ——— C90-270 ———



## Illuminance at a Distance

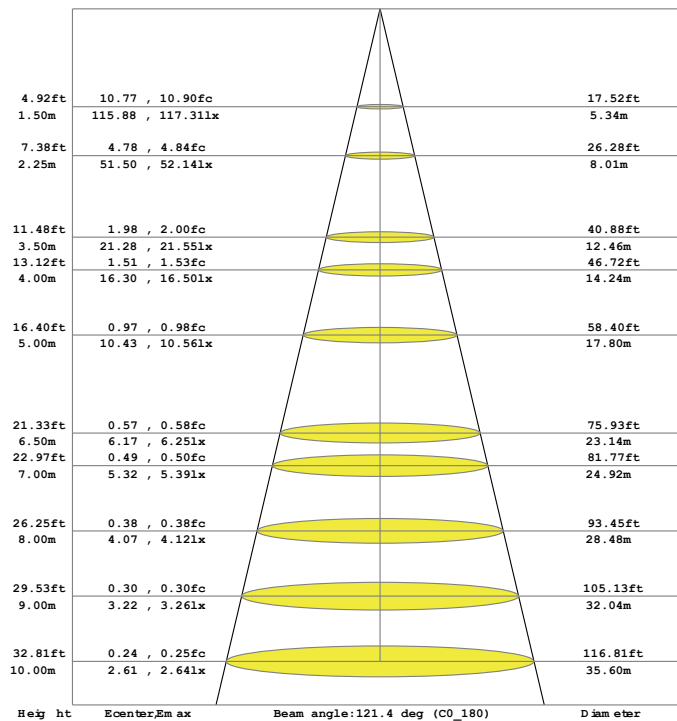


**Installation step**

**⚠ Before finish the installation , do not connect the power**

1. According to practical demand , Fix the strip with clip and screws in needed place  
(The strip is good flexibility for any shape)

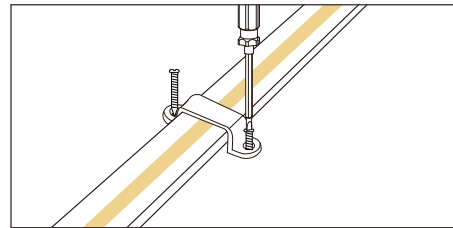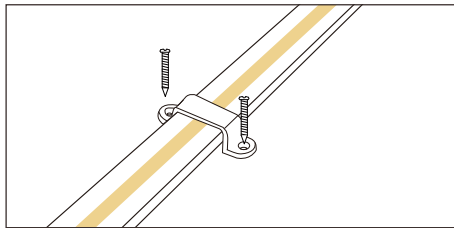


2. Cut the strip according to your requirement (each 100 mm can be cut for 220V strip . )

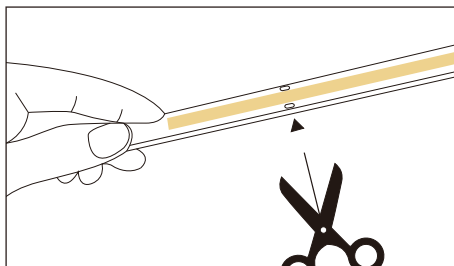


**⚠** Detail cutting mark mentioned in next page

3. Close the strip with end cap and glue with the designative glue for safety and waterproof

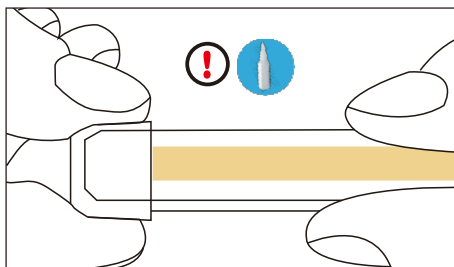

**⚠** Must use the designative glue to glue the interface

**RoHS**

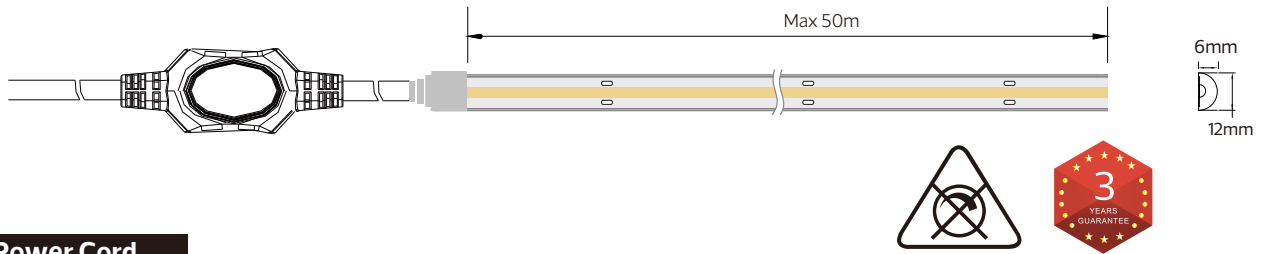

**Power Cord installation**



Glue



Power cord




Clip



End cap

**Accessories**

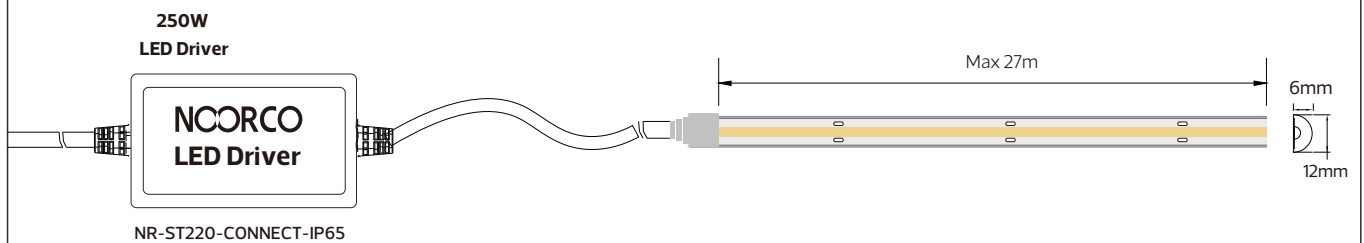

**LED Driver installation**



Glue



Clip



End cap

**LED Driver Accessories**