

3 Gang 2 Way Switch

Model:D1006

Technical Specification

Electrical:

Input Voltage:AC250V~50/60Hz

Rated Current:
10 amps - no derating when used on fluorescentor
inductive loads

Cable Size:

4x1mm²
4x1.5mm²
3x2.5mm²
2x4mm²
1x6mm²

Contact gap:
3mm switch contact gap

Physical:

Operating Temperature:-5°C~50°C

IP Rated:IP20


Max Installation Altitude:≤2000M

Operational Testing:
Tested to 100,000 operations for mechanical life
Tested to 40,000 operations at 10 ampere rating




Description

Dual-control switches are widely used in homes, offices, shops, and other places to control the on/off state of indoor lighting, fans, and other electrical appliances simultaneously. It is particularly suitable for situations where convenient control from two different locations is required, such as staircases, hallways, or larger rooms.

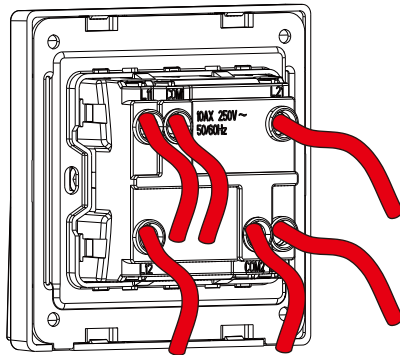

Wiring Diagram


Product Dimensions

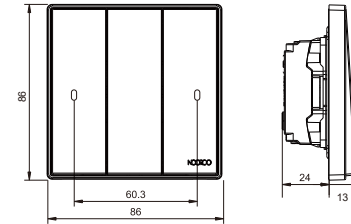

Product Material

NO .	Name	Material	Specifications
1.	Rock'er	PC	SABIC GE
2.	Surface frame	PC	
3.	Slider	PA	Nylon
4.	Basebox cover	PA	Nylon
5.	Springs	Spring steel	
6.	Fulcrum	Nylon	Nylon - 66
7.	Silver Contact Part	Silver	Silver& Coppercomposite
8.	Copper Slider	Brass	Phosphor Copper
9.	Copper Contact Part	Brass	59 Copper particles
10.	Copper Contact Part	Brass	
11.	Screw	Iron	Carbon Steel
12.	Base	PA	
13.	Middle frame	Iron	

Wiring Diagrams

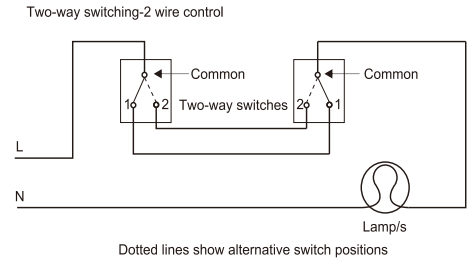

Technical characteristics

Can use in ocean weather and high temperature up to 130 celsius degree.PC material V0 inflaming retarding .Strong hygroscopicity, excellent strengthand durability

Silver thickness 0.6mm,silver contact diameter 4.0mm, thickness 1.5mm,contact surface big . Improve the silver contact arc extinguishing performance,reduce the electrical wear.Maintain low contact resistance

Big copper connector 2.8 gram, moisture resistance and stand wear and tearDifficult to make e ectrica spark ,our products can use in the moist weather

4*6.5mm screw ,make the cable very fastness,surface gold-plating, prevent oxidation,improve the electrical conductivity

