

UK Socket with Double Pole Switch

Model:D1011

Technical Specification

Electrical:

Input Voltage:AC250V~50/60Hz

Rated Current: 13A per socket outlet

Terminal capacity: Live,neutral & earth

Cable Size:

3x2.5mm²

3x4mm²

2x6mm²

Contact gap:

3mm switch contact gap

Physical:

Operating Temperature:-5°C~50°C

IP Rated:IP20

Max Installation Altitude:≤2000M

Operational Testing:

Tested to 100,000 operations for mechanical life


Tested to 30,000 operations at 13 amp rating

Tested to 10,000 operations at 20 amp rating




Description

The switched British square plug socket is widely used in homes, offices, hotels, and other places, offering users a convenient power interface. Users can plug in their electrical devices and control the power on/off state by operating the switch button. Whether it's for everyday appliance usage or charger interfaces, the switched British square plug socket can meet users' basic needs.

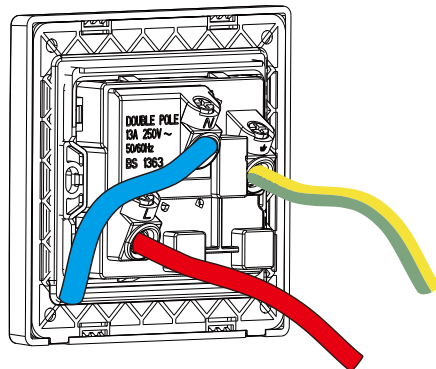


Wiring Diagram

Product Dimensions

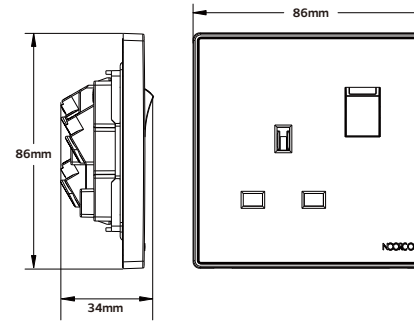

Wiring Diagrams

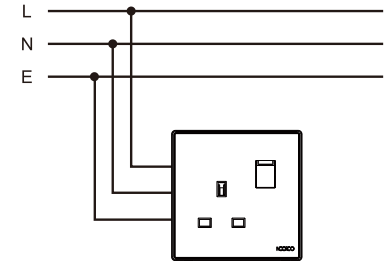

Product Material

NO .	Name	Material	Specifications
1.	Surface frame	PC	SABIC GE
2.	Basebox cover	PA	
3.	Rocker	PC	
4.	Spring	Spring steels	
5.	Safeguard door	PA	Nylon
6.	Copper Slider	Brass	Phosphor Copper
7.	Silver Contact Part	Silver	Silver& Coppercomposite
8.	Earth wire	Iron	Carbon Steel
9.	Screw	Iron	Carbon Steel
10.	Wire terminal	Brass	Phosphor Copper
11.	Wire terminal	Brass	59 Copper particles
12.	Base	PA	
13.	Middle frame	Iron	

Technical characteristics

Can use in ocean weather and high temperature up to 130 celsius degree.PC material VO inflaming retarding .Strong hygroscopicity, excellent strengthand durability

Silver thickness 0.6mm,silver contact diameter 4.0mm, thickness 1.5mm.contact surface big .Improve the silver contact arc extinguishing performance,reduce the electrical wear.Maintain low contact resistance

4*8mm screw ,make the cable very fastness,surface gold-plating, prevent oxidation,improve the electrical conductivity

Big copper connector 2.8 gram, moisture resistance and stand wear and tearDifficult to make electrical spark ,our products can use in the moist weather 0.6mm thickness copper,moisture resistance and stand wear and tear .Difficult to make electrical spark , our products can use in the moist weather .

