

Double UK Socket with Switch

Model:D1031

Technical Specification

Electrical:

Input Voltage:AC250V~50/60Hz

Rated Current:13A

Cable Size:
3x2.5mm²
3x4mm²
2x6mm²

Contact gap:
3mm switch contact gap

Physical:

Operating Temperature:-5°C~50°C

IP Rated:IP20

Max Installation Altitude:≤2000M

Operational Testing:

Tested to 100,000 operations for mechanical life

Tested to 30,000 operations at 13 ampere rating


Tested to 10,000 operations at 20 ampere rating




Description

The double British square plug with switch and indicator light is suitable for scenarios where two British-style plug devices need to be connected simultaneously. It provides convenient switch control and indicator light to display the power status, commonly used in homes, offices, and commercial environments.


Wiring Diagram

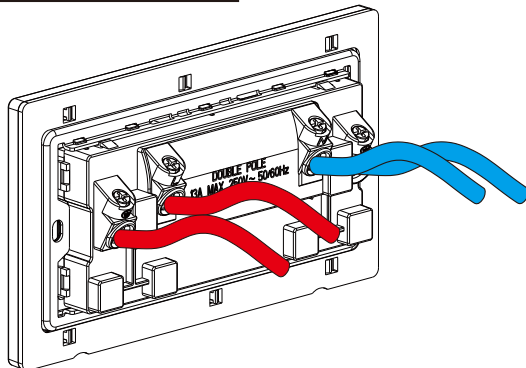

Product Dimensions

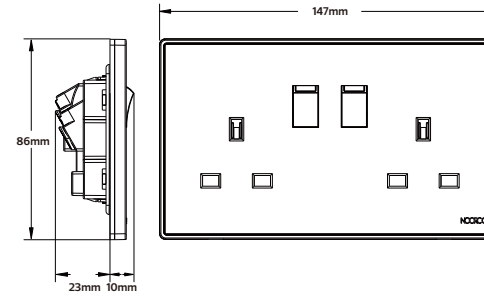

Wiring Diagrams



Product Material

NO.	Name	Material	Specifications	Technical characteristics
1.	Surface frame	PC	SABIC GE	Can use in ocean weather and high temperature up to 130 celsius degree. PC material VO inflaming retarding .Strong hygroscopicity, excellent strengthand durability
2.	Middle frame	PC		
3.	Rocker	PC		
4.	Spring	Spring steels		
5.	Safeguard door	PA	Nylon	Silver thicknes 0.6mm,silver contact diameter 4.0mm, thicknes 1.5mm.contact surface big . Improve the silver contact arc extinguishing performance,reduce the electrical wear.Maintain low contact resistance
6.	Copper Slider	Brass	Phosphor Copper	
7.	Copper Contact Part	Brass		
8.	Silver Contact Part	Silver	Silver&Copper composite	
9.	Wire terminal	Brass	59 Copper particles	Big copper connector 2.8 gram, moisture resistance and stand wear and tear.Difficult to make electrical spark , our products can use in the moist weather. 0.6mm thickness copper,moisture resistance and stand wear and tear .Difficult to make electrical spark , our products can use in the moist weathe o
10.	Base	PA	Phosphor Copper	
11.	Middle frame	Iron		

