

UK SockEt + 45A Double pole Switch

Model:D1033

Technical Specification

Electrical:

Input Voltage:AC250V~50/60Hz

UK Rated Current:13A

Rated Current:45A

Cable Size:

4x4mm²

3x6mm²

1x6mm²

Contact gap:

3mm switch contact gap

Physical:

Operating Temperature:-5°C~50°C

IP Rated:IP20

Max Installation Altitude:≤2000M

Operational Testing:

Tested to 100,000 operations for mechanical life


Tested to 40,000 operations at 10 ampere rating

Tested to 10,000 operations at 20 ampere rating




Description

The 45A high-current switch is applicable for controlling higher-powered electrical appliances in residential settings. It can be used to control devices such as air conditioners, washing machines, water heaters, ovens, and more. By utilizing this high-current switch, you can conveniently control and protect your electrical appliances and circuits.

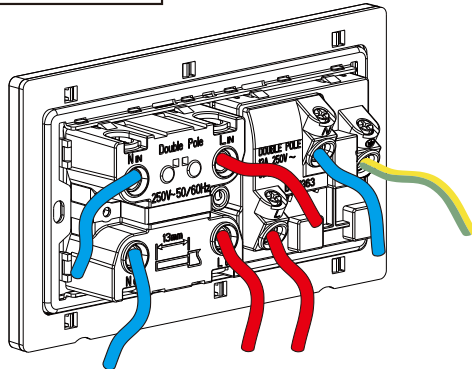


Wiring Diagram

Product Dimensions

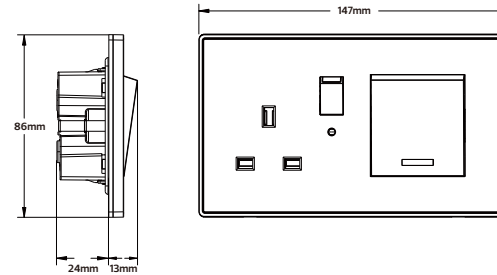

Wiring Diagrams

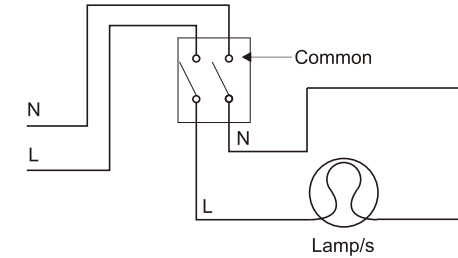

Product Material

NO.	Name	Material	Specifications	Technical characteristics
1.	Surface frame	PC	SABIC GE	Can use in ocean weather and high temperature up to 130 celsius degree. PC material VO inflaming retarding .Strong hygrosopicity, excellent strengthand durability
2.	Rocker	PC		
3.	Slider	PC		
4.	Basebox cover	PC		
5.	Copper Slider	Brass	Phosphor Copper	Big copper connecter 2.8 gram, moisture resistance and stand wear and tearDifficult to make electrical spark ,our products can use in the moist weather 0.6mm thickness copper,moisture resistance and stand wear and tear. Difficult to make electrical spark , our products can use in the moist weathe o
6.	Safeguard door	PA		
7.	Copper Contact Part	Brass		
8.	Wire terminal	Brass		
9.	Basebox cover	PC	Carbon Steel	4*6.5mm screw ,make the cable very fastness,surface gold-plating, prevent oxidation,improve the electrical conductivity
10.	Base	Iron	Nylon	

