





SOLAR LED OUTDOOR WALL LIGHT




ESL-83
IP54

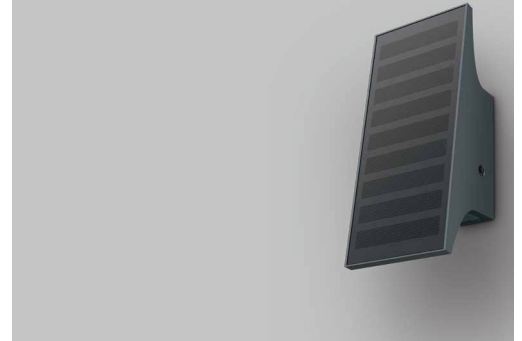

Item Code	Watt	Solar Panel	Battery Capacity	Charging/ Discharging Temp:	Charging Time	CCT	kg
ESL-83	6.8W	Mono-Crystalline 1.5W	3.7V/7.4Wh	0~45°C/-20~60°C	7h	4000K,Ra≥80	0.4
Lumen	Lighting Time in Rainyday	Control Mode	Lighting Mode		PIR	IP/IK Rated	
Up:200lm Down:500lm	≥10 days	Long Press 1.5s On/Off	M1:25% till dawn M2:50% till dawn M3:75% till dawn M4:100% till dawn		/	IP54	

Dimensions in mm

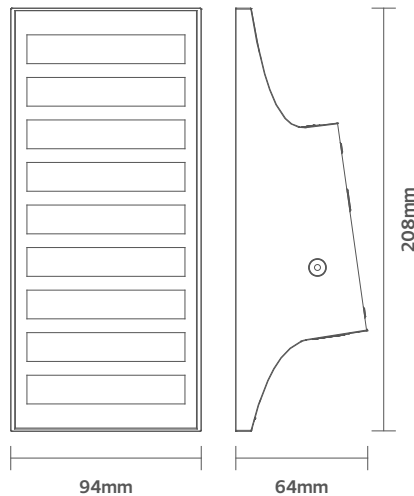

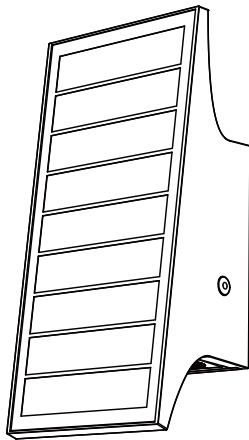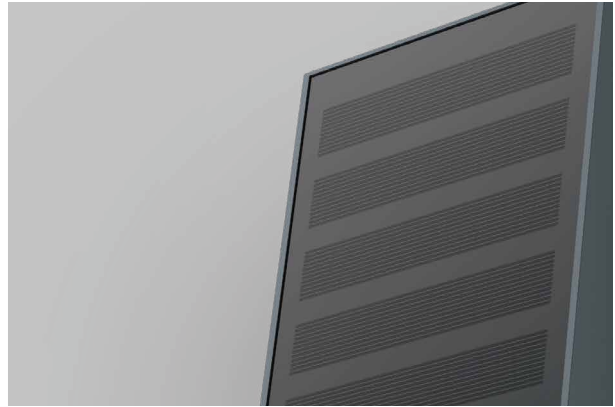
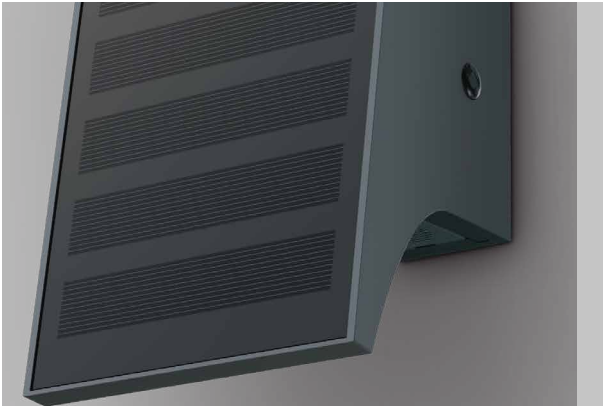



Description:
SOLAR LED OUTDOOR WALL LIGHT

Main material:
PC

Specification
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps High quality light, high color rendering, less heat, no UV or IR radiation
LED driver is included
IP 54

Applications
. Park
. Square
. Garden

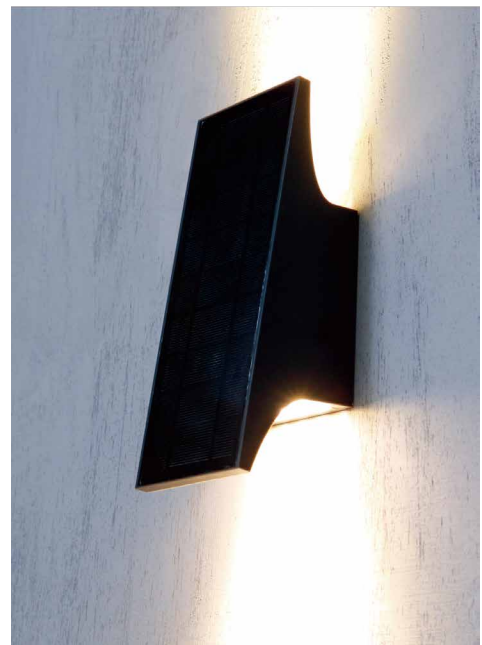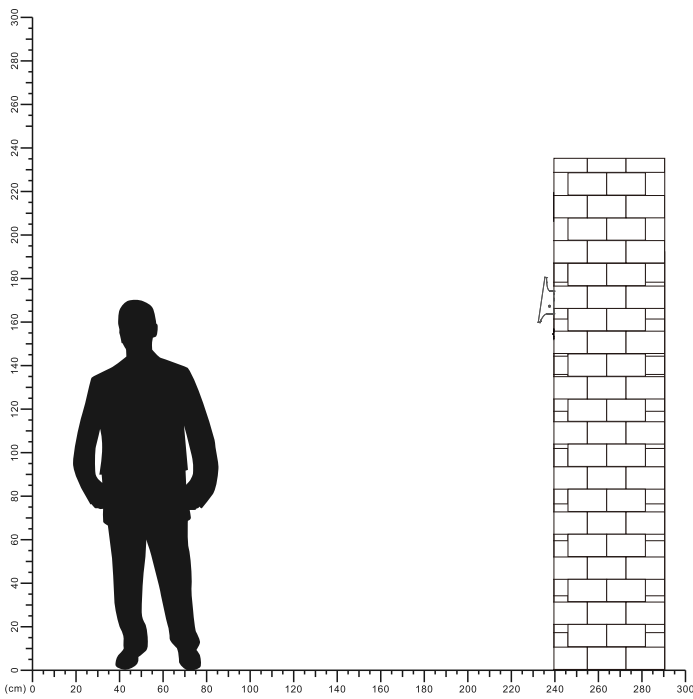

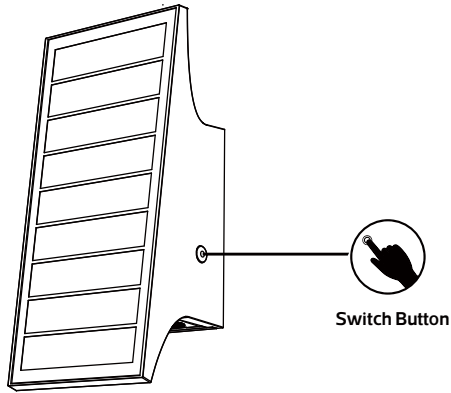


Switch Button


1.On/Off: Long press for 1.5s.
 (After the initial activation, the lamp will turn on/off automatically when dark/dawn.)
 2.Change lighting mode: Short press.

Lighting Mode


M1: 25% till dawn
 M2: 50% till dawn
 M3: 75% till dawn
 M4: 100% till dawn




1 Take off the bracket from the lamp body



2 Drilling and embedding the expansion screws into the wall

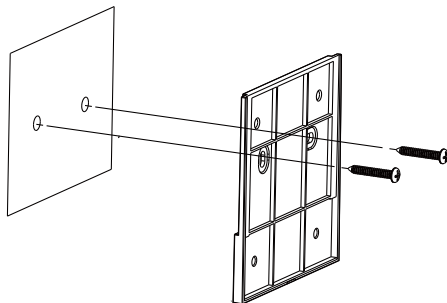

3 Fix the bracket by screws into the wall

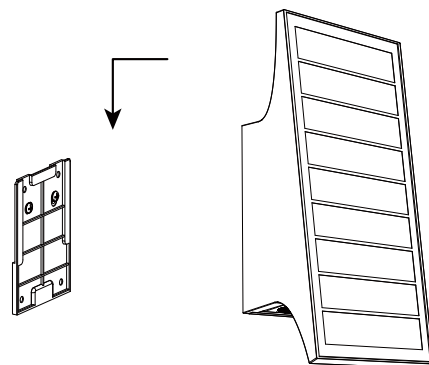

4 Hang the lamp body on the bracket

