




## LED Panel Light


GL-CL105 Series  
IP20



Item Code	P (W)	CCT(K)	Beam angle	Output (lm)	lm/w	Dimensions in mm		kg
						A	B	
GL-CL105-15	15	3000/4000/6500	120°	1200	80	Φ168	42	0.3
GL-CL105-30	30	3000/4000/6500	120°	2400	80	Φ220	42	0.4
GL-CL105-40	40	3000/4000/6500	120°	3200	80	Φ305	50	0.8

### Dimensions in mm

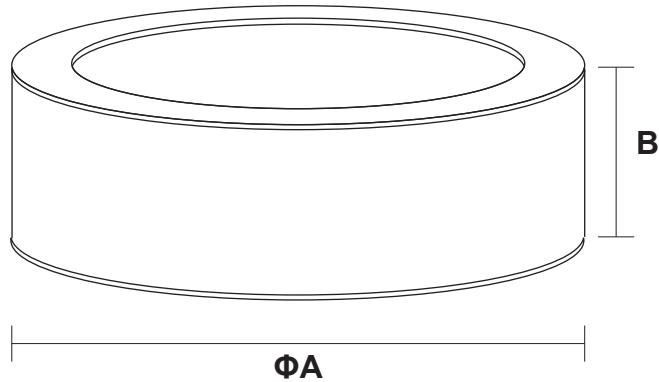

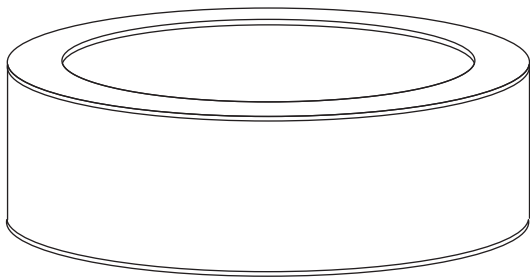

**Description:**

LED CL105 Panel Light

**Main material:**


Engineering plastic + glass cover

**Specification**


Energy saving, upto 85% energy saving comparing to standard halogen and incandescent lamps Long life, up to 30,000 hours High quality light, high color rendering, less heat, no UV or IR radiation Build-in LED driver IP20

**Applications**


- . Shopping mall
- . Office buildings
- . Exhibition hall
- . Public lighting places
- . Domestic

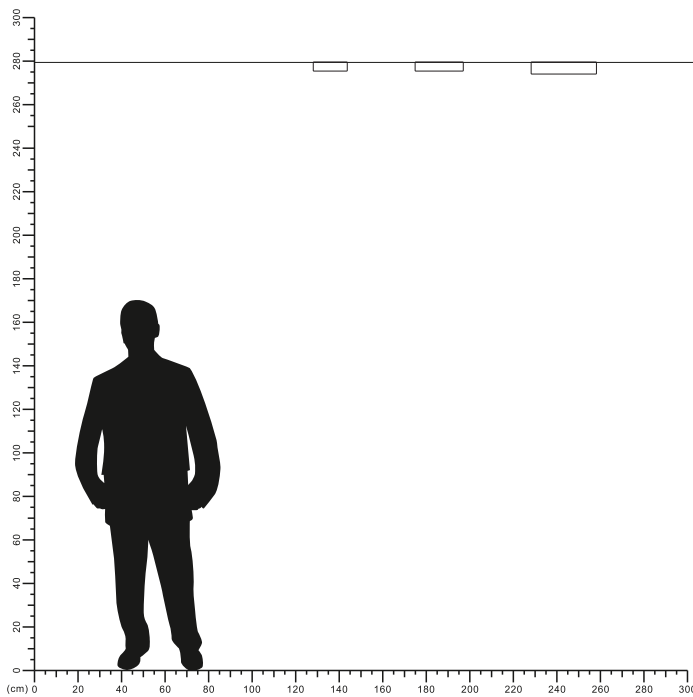

# LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

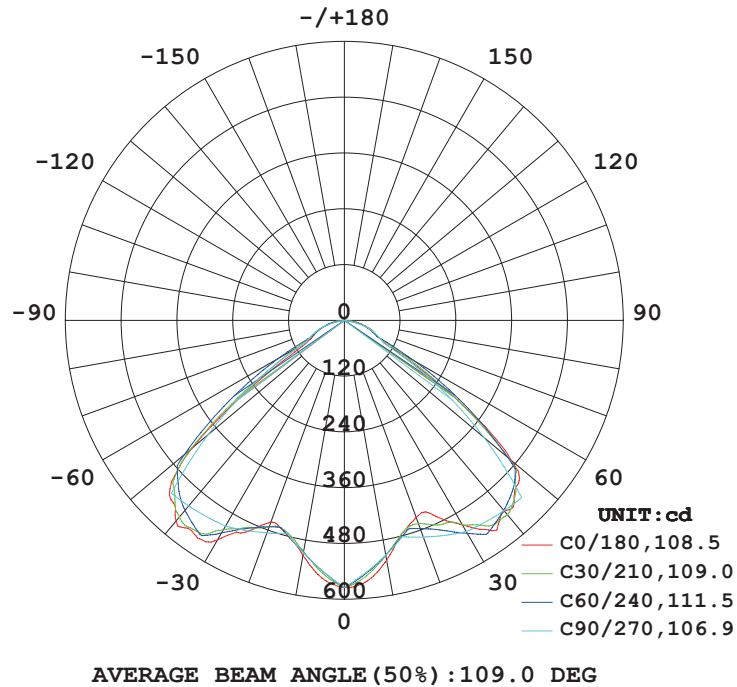


## Illuminance at a Distance

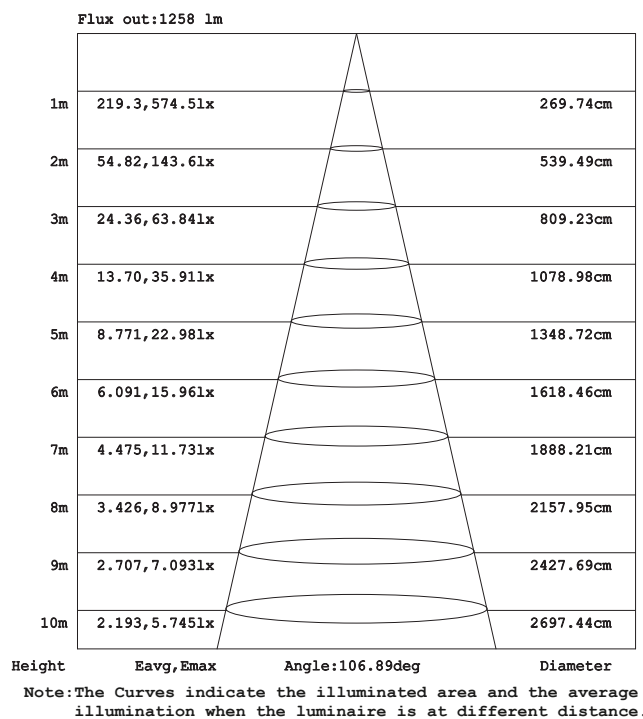


Model: GL-CL105-15

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

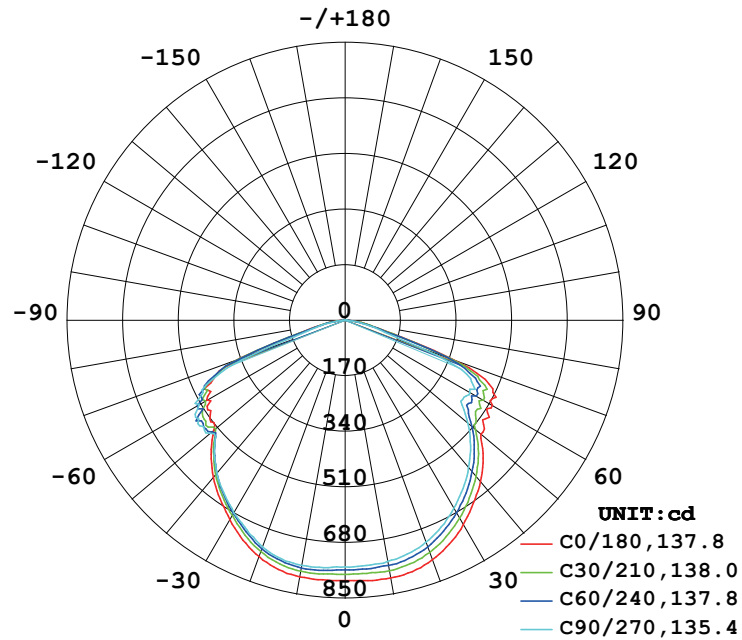


AVERAGE BEAM ANGLE (50%) : 137.2 DEG

## Illuminance at a Distance

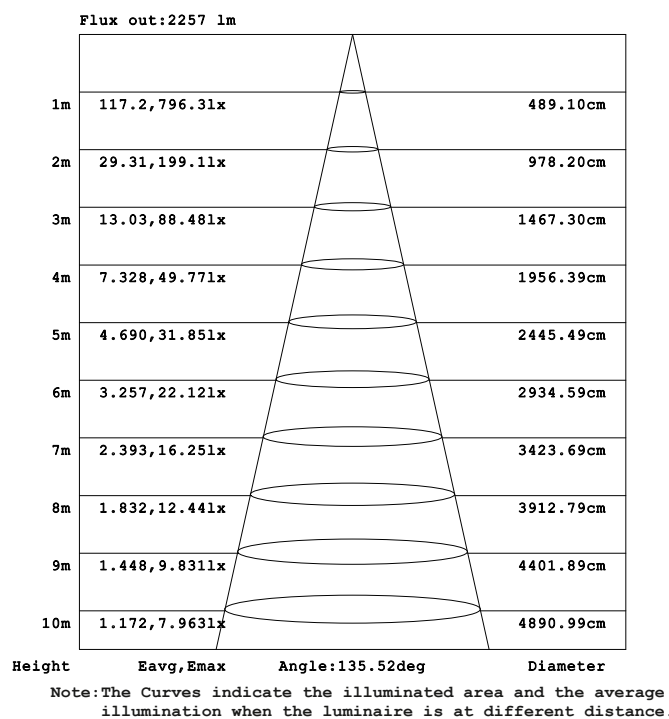


Model: GL-CL105-30

# LUMINOUS INTENSITY DISTRIBUTION DIAGRAM







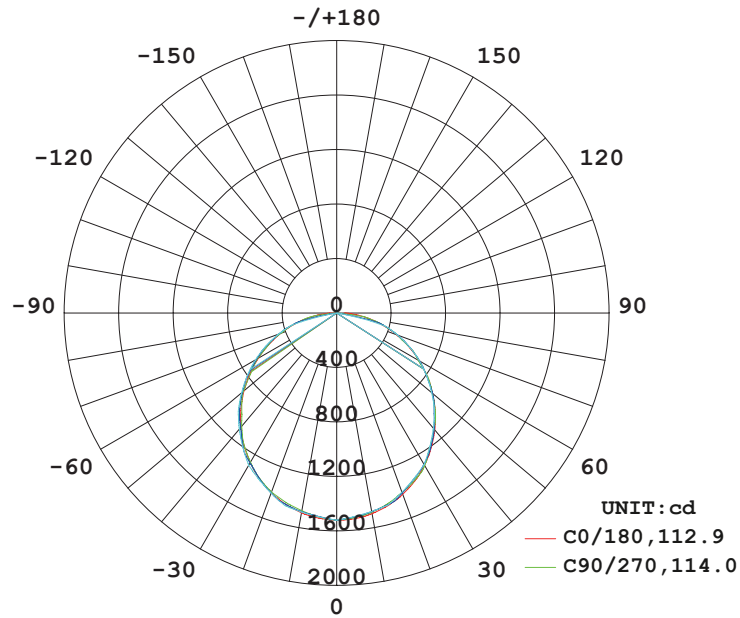


AVERAGE BEAM ANGLE (50%) : 113.3 DEG

## Illuminance at a Distance

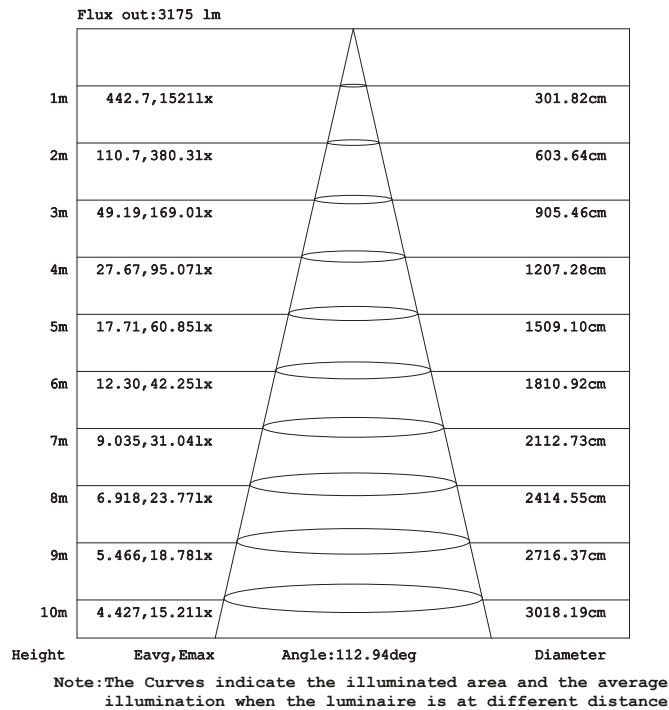

Model: GL-CL105-40
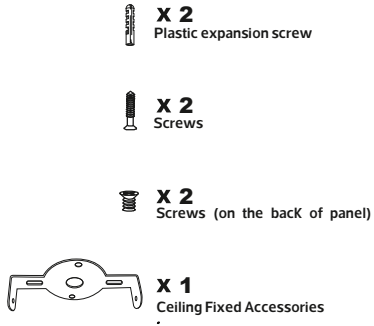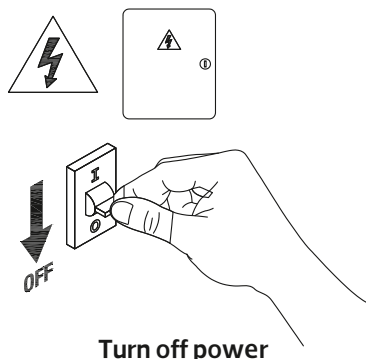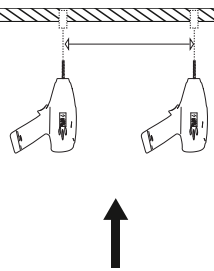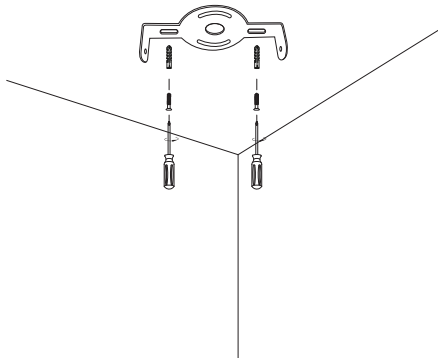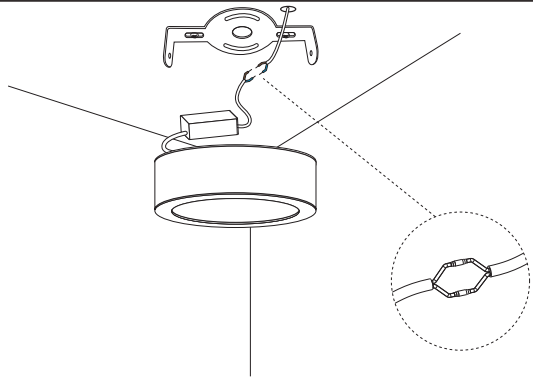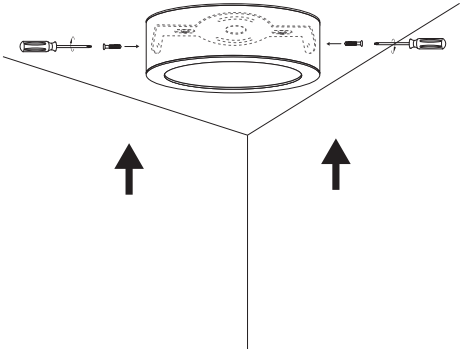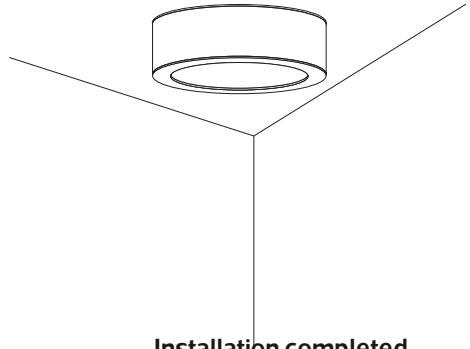
<p><b>1</b></p> <p><b>X 2</b> Plastic expansion screw</p> <p><b>X 2</b> Screws</p> <p><b>X 2</b> Screws (on the back of panel)</p> <p><b>X 1</b> Ceiling Fixed Accessories</p> 	<p><b>2</b></p> <p>Turn off power</p> 
<p><b>3</b></p> <p>Drill two screw holes in the ceiling</p> 	<p><b>4</b></p> <p>Attach the buckle and screws to the ceiling</p> 
<p><b>5</b></p> <p>Connect the cable</p> 	<p><b>6</b></p> <p>Mounting side screws</p> 
<p><b>7</b></p> <p>Installation completed</p> 	<p><b>8</b></p> <p>Turn on power</p> 