
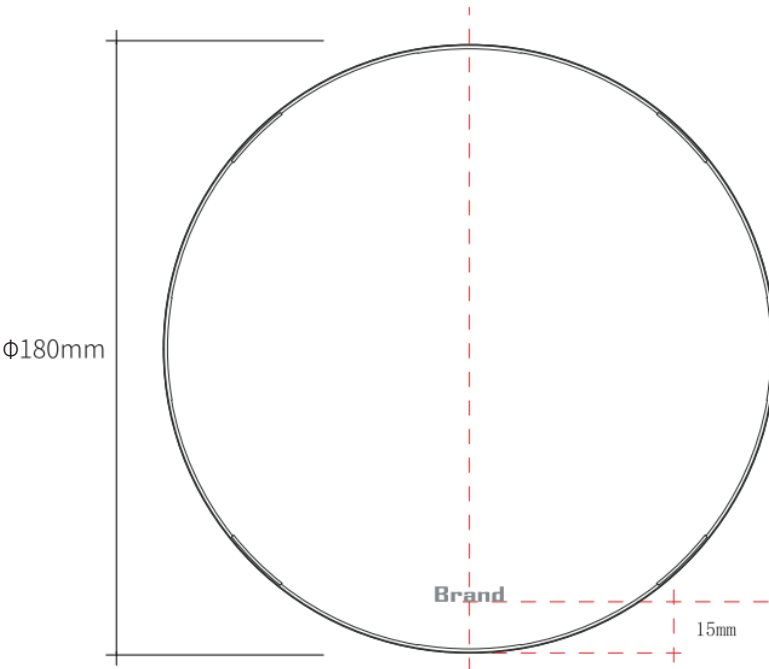


SMART WHITE NOISE MACHINE





Item Code	Controller Input	P(W)	Adaptor	Speaker	Material	
MS-WU102-W-RGB	100-240V	10	5V-2A	4Ω 2W	PC,ABS,Metal	0.56

Dimensions in mm





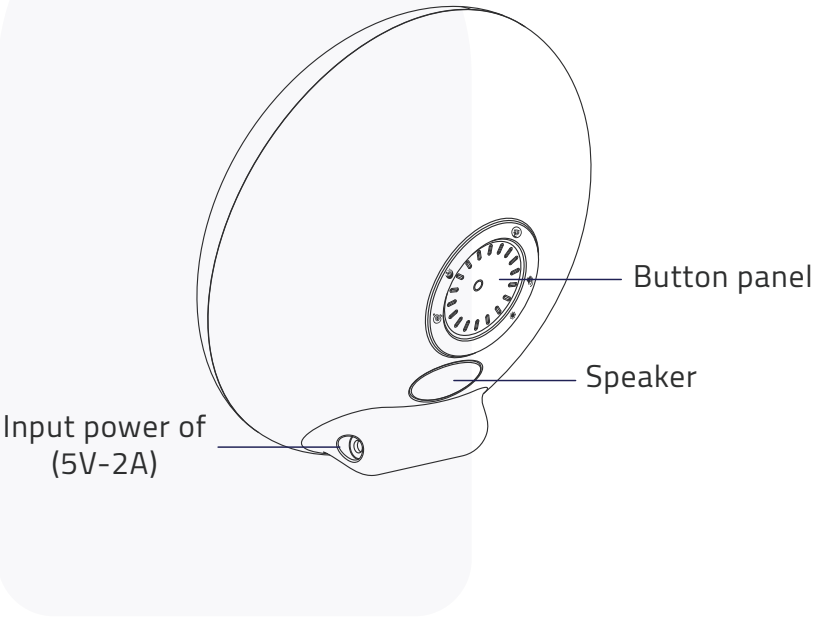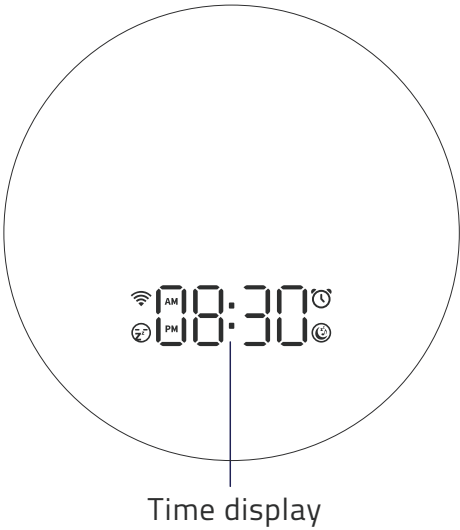



Elements



Controls



-  Button panel
-  Clock
-  Sleep-Aid
-  Snooze/Wi-Fi
-  Volume
-  Setting



Quick Guidance

Lamp Function



Colorful Light


press  to switch on/off coloured lantern, rotate  to configure the Light Brightness, Click  again to switch the light mode.




Double-click  to switch the light color in mode. Long press  for 3S to turn off the light.

Sleep-Aid



Sleep-Aid


Press  to switch on/ off sleep-aid mode.




Press and hold  to enter setting, rotate  to choose options, press  to apply.

Alarm Clock



Alarm



Press  to turn on/ off the alarm.

Press and hold  to set the alarm, rotate  to adjust the time, and click  again to confirm the setting.

Volume Function




Volume




Click  to turn on the volume adjustment, rotate  to adjust the volume.


General settings





Setting

Press  to adjust the brightness of the screen.

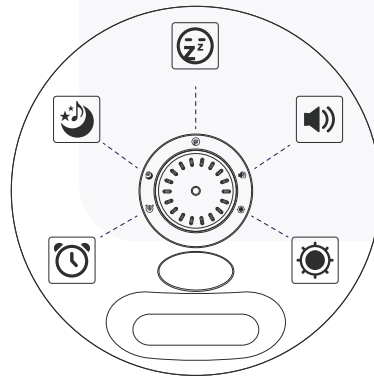Long press  to set time, rotate  to configure the clock, click  to make confirmation.



Wi-Fi Connecting

Plug in,  flashes to enter Wi-Fi connecting status. If Wi-Fi connection fails, press and hold  to enter compatible mode.

If  stays solid (no flashing at all), press and hold  to enter Wi-Fi connecting status. ( flashes after successfully entered Wi-Fi connecting status)

Attention : During the connecting process, if there is no action within 15 seconds, machine would resume to its home screen.

APP GUIDANCE


Wi-Fi setup

1. App Download


1. Search the App "Huem" from Apple Store or Google Play.



Log in / Register App

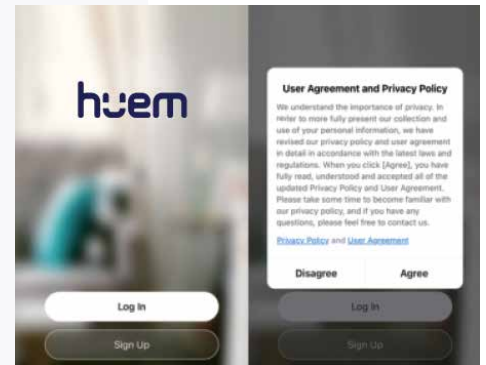

2. Scan the QR code from the label or user manual.

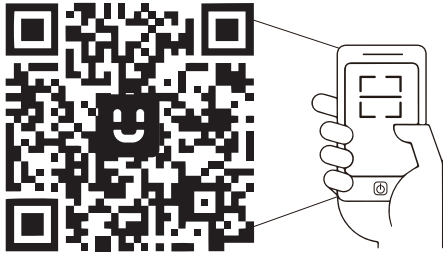






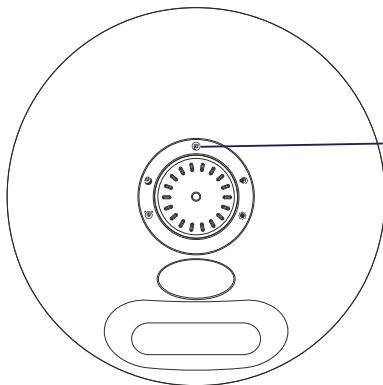
Android
5.0

iOS 10.0

The App is compatible with Android 5.0 and iOS 10.0 and higher version.

2. Wi-Fi connecting mode

- ① Plug in to power, the flashing  indicates the machine is now under Wi-Fi connecting mode;
- ② If the  stays solid, press and hold both left and right end of  till  flashes. Again, the flashing indicates machine  is now under Wi-Fi connecting mode.




Long press the
snooze button

Attention: Only connects to 2.4 GHz Wi-Fi




Flashing

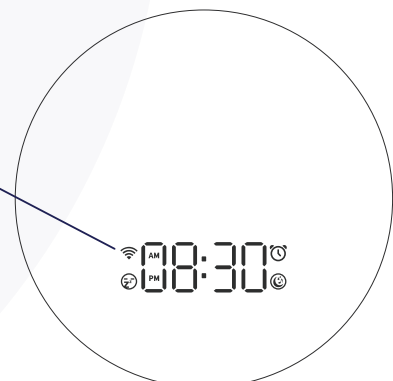


CONNECT DEVICE TO APP

App auto-search and connect


① Open up "Huem" App, click "+";

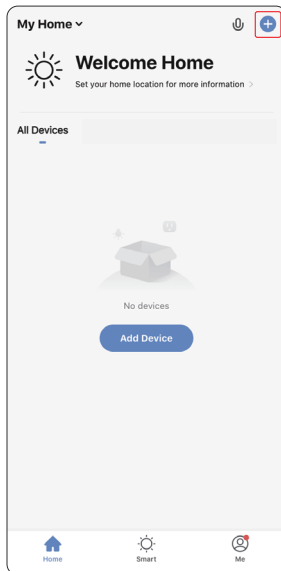


② Click on "Go to add";

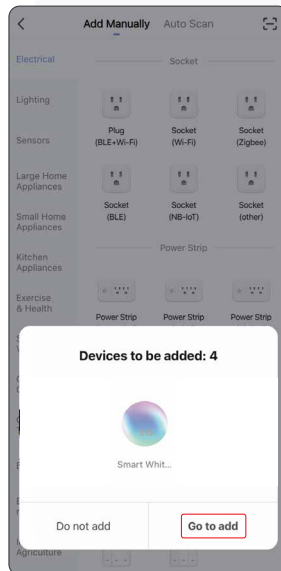


③ accompanied with the display of device icons, click "+" at the top right to add device.

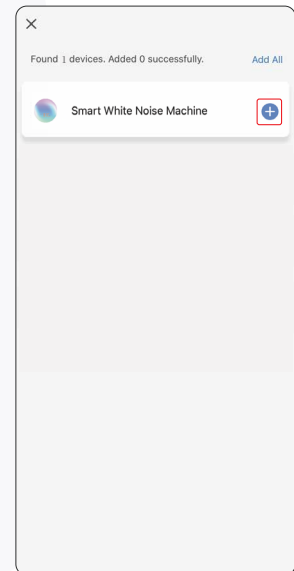

④ Type in 2.4 GHz Wi-Fi password and click on "Next" (make sure the smartphone and Huem app are both connected to 2.4 GHz Wi-Fi);

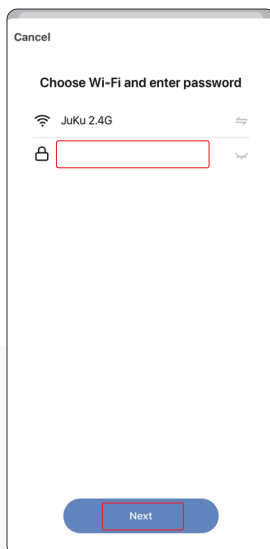

⑤ Put machine, smartphone and the router in the same area when connecting, preferably short distance;

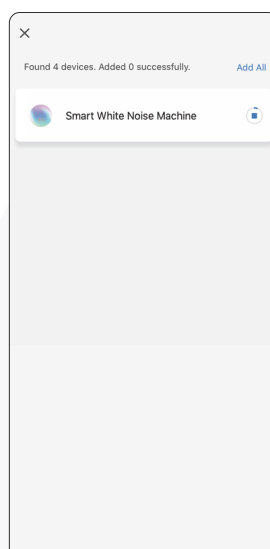


⑥ You can edit a new name for machine after it successfully connects to your 2.4 GHz Wi-Fi, click on "Done" to complete the Wi-Fi setup process, when re-entering the App, the "📶" stays solid and high-lighted.



APP SETTINGS PAGE


1. User interface

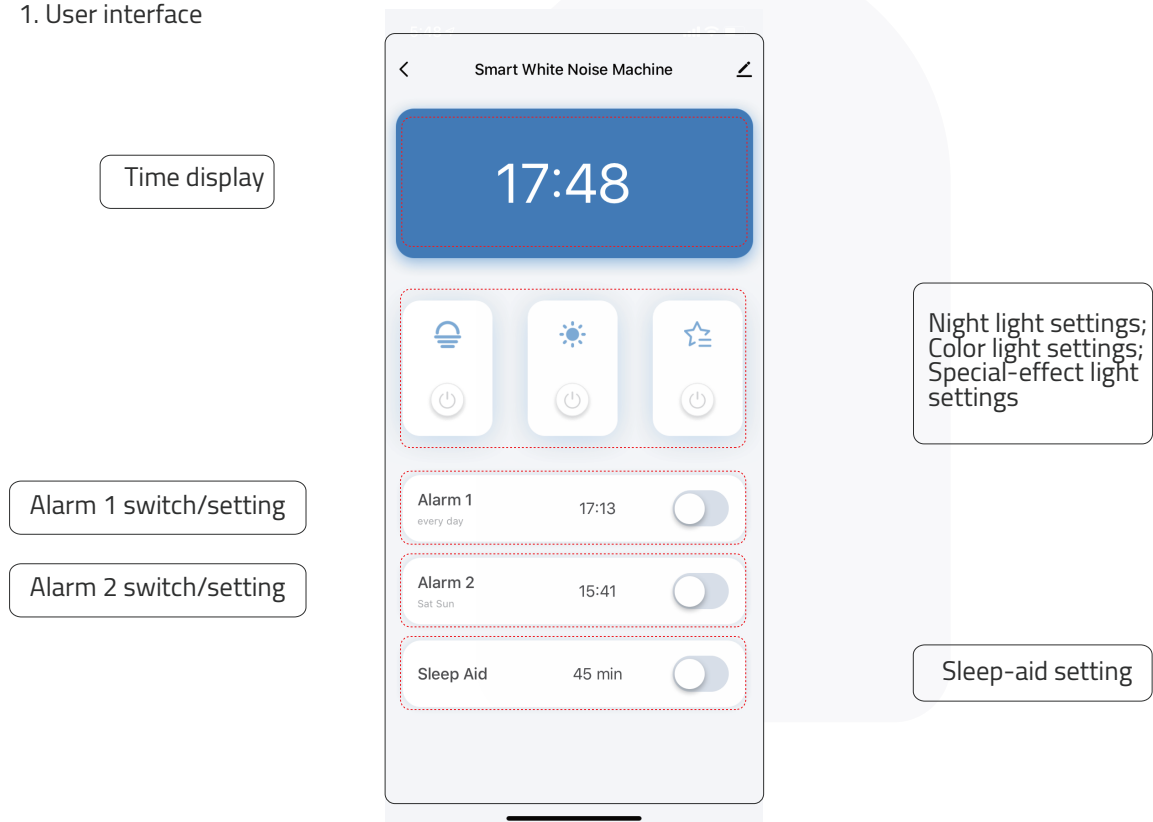

2. Time setting


Machine automatically calibrates with real time after successful Wi-Fi connection, you can also manually calibrate the time and switch between duodecimal hour system (12-hour clock) and military time(24-hour clock) on the app.

- ① Tap the time display section to enter machine setting page, it allows you to customize your desired screen display with all the detailed settings;
- ② Click "Save" to save all the settings and exist.

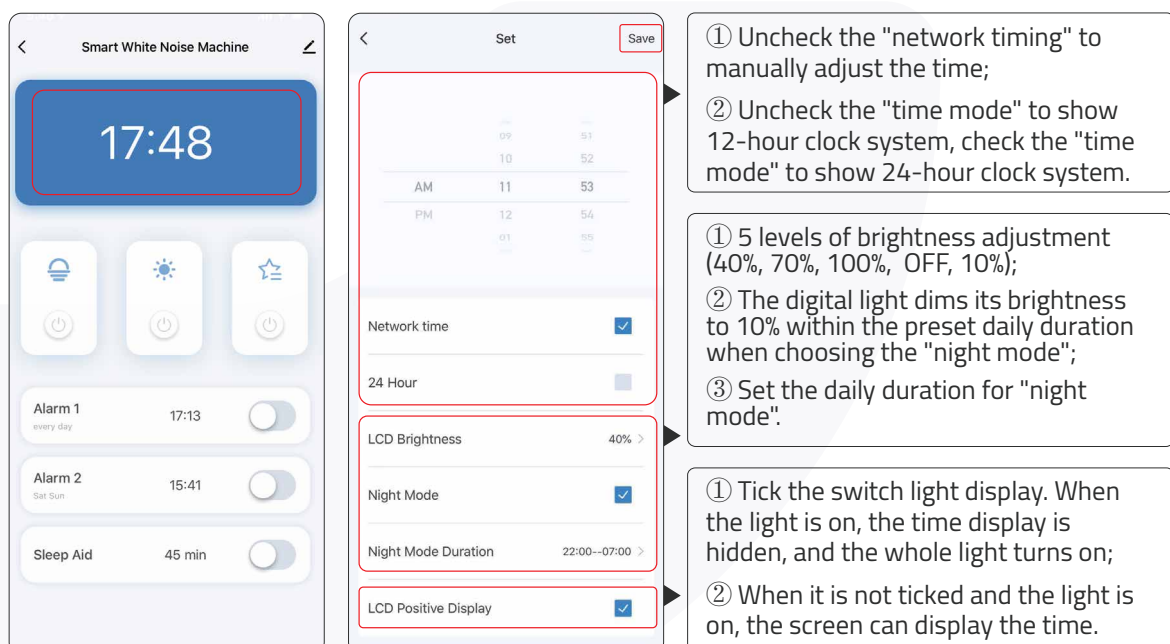

NIGHT LIGHT SETTING

- ① You are able to turn on/off night light from the main interface;
- ② Tap "Night" section to enter "Night Light" page, adjust the brightness level.

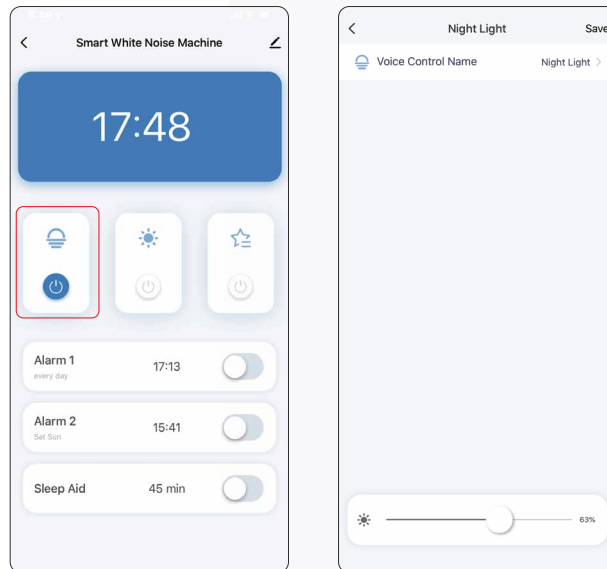


* Change the name: The APP can be customized

COLOR LIGHT SETTINGS

- ① The color light of device can be turned on / off directly on the main page of APP;
- ② Click the "Color light" area to enter into the "Light Switch" settings page, then you can change the name, adjust the brightness and color of the color light, after the change, please click "Save".

Attention: The change of the color here is only the change of the custom color (please refer to the customization in ⑪ on P27 of "Lighting effect settings"), and the custom color can only be changed here.

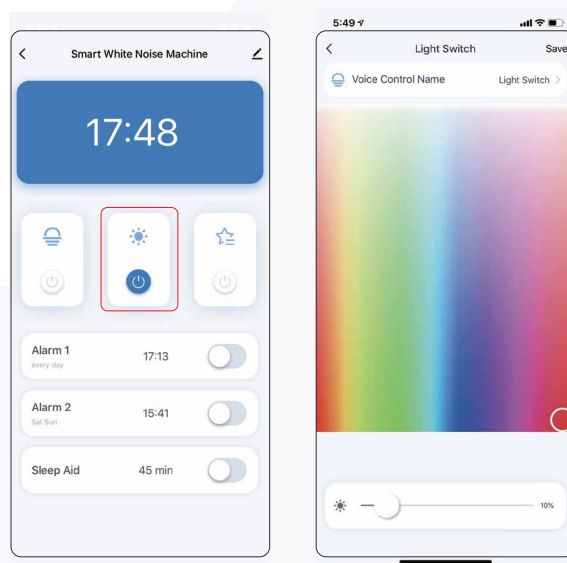


* Change the name: The APP can be customized

SPECIAL-EFFECT LIGHT SETTINGS

5. Special-effect light Settings

- ① The special-effect light of device can be turned on / off directly on the main page of APP;
- ② Click the "Special-effect light" area to enter into the "Ambilight" setting page, then you can change the name, adjust the brightness of the light effect, and select the type of the light effect;
- ③ Click "Edit"; click each special-effect light icon, you can change the style and speed of the target light effect, after the change, please click "Save".

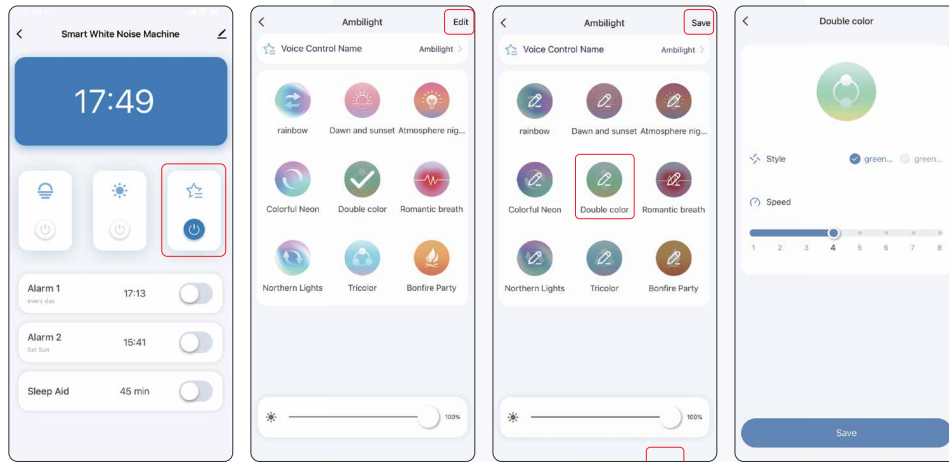


* Change the name: the APP can be customized

ALARM CLOCK SETTING

Attention: Two sets of alarm clocks are set in the same way. The alarm clock button on the back of the device can only turn on "alarm clock 1" but turn off all alarm clocks. Take Alarm clock 1 as a demonstration

- ① You are able to turn on/off both alarm clocks (alarm clock 1 and alarm clock 2) from the main interface;
- ② Click the "Alarm 1" area to enter into the "Alarm 1 settings" page, then you can set parameters such as "Start time, Change name, Repeat time, Alarm music, Sound effects, Alarm time, Alarm light, Lighting time in advance, Snooze" and so on, after change of the settings, please click "Save";
- ③ During the alarm rings: Click "Stop" on the main page of APP to turn off the alarm clock; click "Snooze" to enter into the snooze mode.


* You can also gently push down/ set upright the device during the snooze to switch on snooze mode.

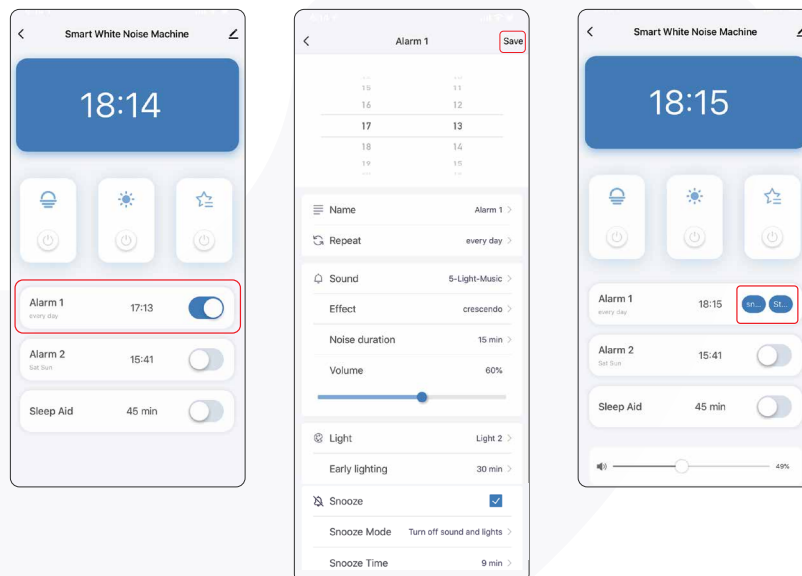

* Change the name: The APP can be customized


SLEEP-AID SETTINGS


- ① You are able to turn on/off sleep-aid mode from the main interface;
- ② Tap "Sleep Aid" section, enter the "Sleep Aid Setting" page, customize all the settings to your liking;
- ③ Tap "Save" to save and exit.

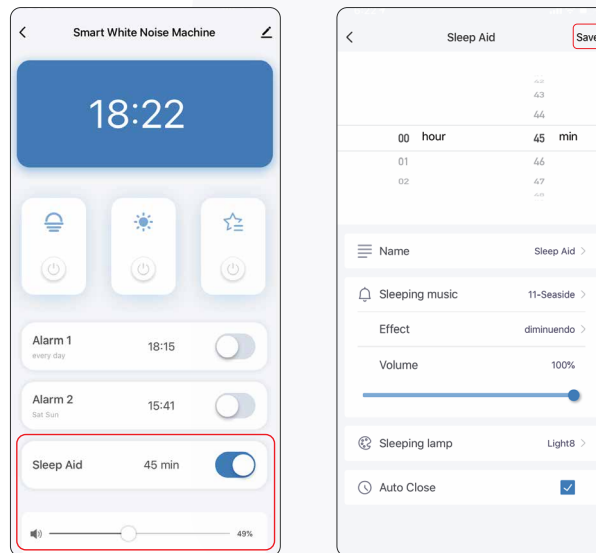

* Change the name: The APP can be customized

OTHER SETTINGS

Click " in the upper right corner to enter, on this screen you can view device information. Third party control guidelines, offline Wake up, remove the device and so on.

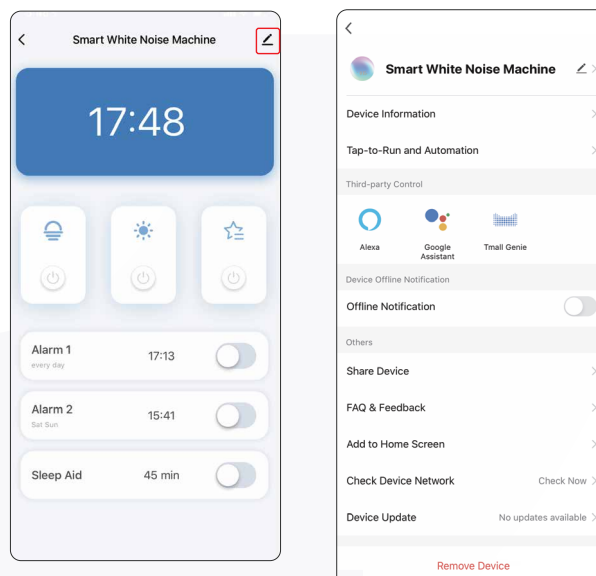


* Change the name: The APP can be customized

VOICE CONTROL


Take "Alexa" connecting setup as an example

Attention: Make sure machine is already linked with the Huem App

- ① Download "Amazon Alexa" from Google Play/App Store and sign up (If you are already an Alexa user, you can just open it) ;
- ② Choose Skills&Games, search Huem and enable Huem.

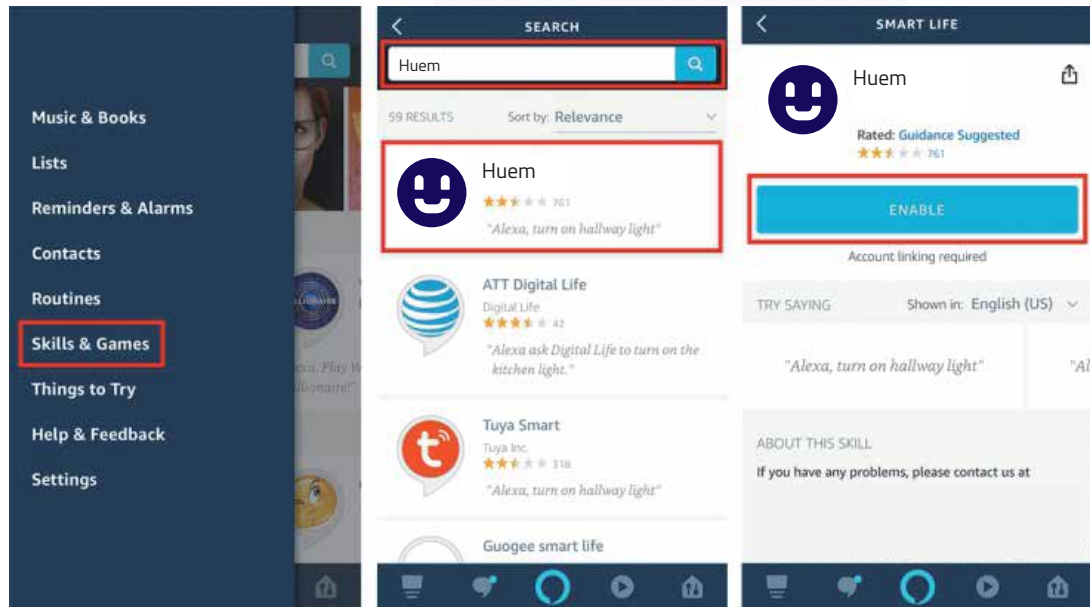


- ③ Log in to Alexa Huem with the same username and password you have for Huem App and tap "Authorize". You are able to voice control machine with Amazon Echo(Alexa) after seeing Huem has been successfully linked.

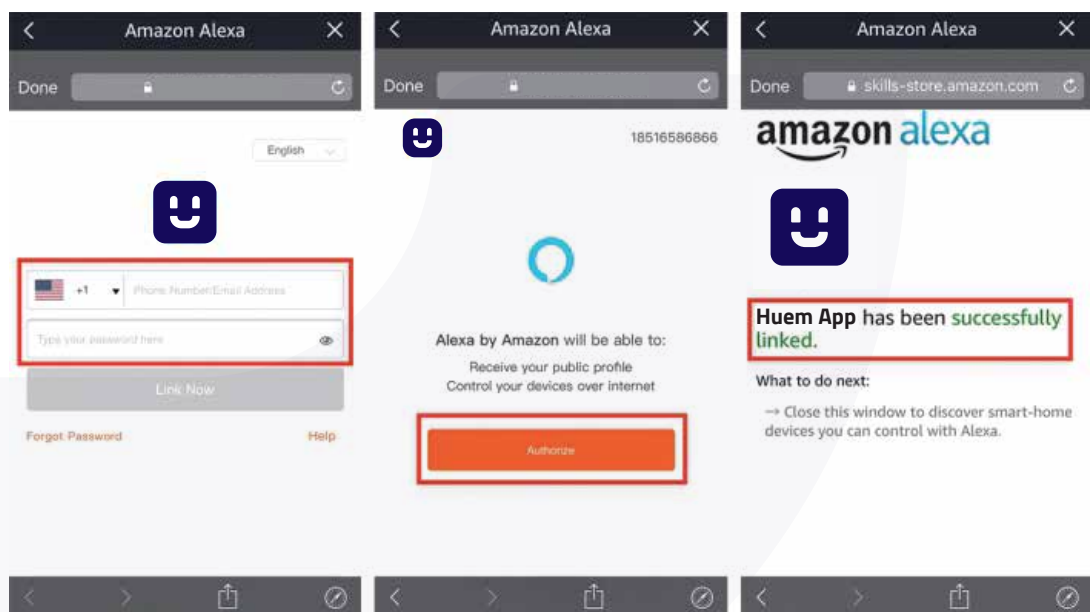

VOICE CONTROL

④ Open Huem App to check if the third-party control has linked, if it shows yes, it means the two accounts has linked up on cloud. You can rename the device with Huem App and Alexa will automatically synchronize the new name via cloud.

Attention: You can also have Alexa to discover new device and repeat the linking process to re-link with the re-named device via Huem App.(only an optional operation)

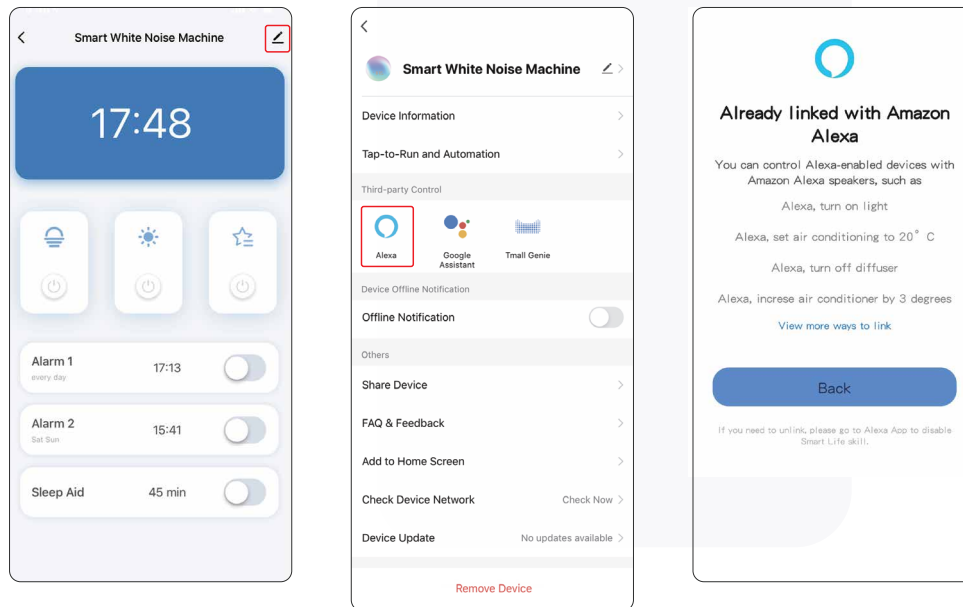

VOICE CONTROL DEMOSTRATION

You can re-name all the functions of machine, Alexa will sync with the new names and recognize them as voice commands. Works with Alexa/Google smart home.

Attention: Minor delay might occur due to various Wi-Fi speed and cloud processing system, when machine or Alexa fail to react to voice control, please wait for a few minutes and try again

You can control by voice: switch the Night Light , change the brightness of the Night Light , change the color of the Light , switch the Alarm , switch the Sleep-aid.

Here are some commands to try

"Alexa, Turn on/off the Night Light"

"Alexa, Set Night Light to 20%"

"Alexa, Turn on/off the Color Light"


"Alexa, Change Color Light to red"


"Alexa, Turn on/off the Alarm"



"Alexa, Turn on/off the Sleep-aid"


USAGE SET THE FUNCTIONS

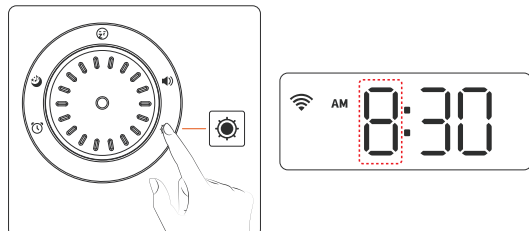

1. Set the time and date


① Plug in to power, press and hold  to enter the time setting;



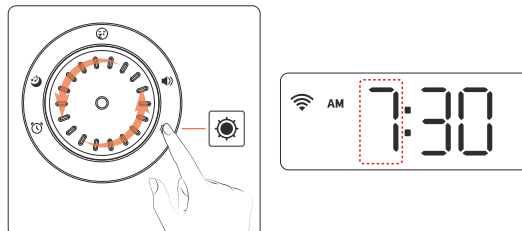


② Rotate  to change the hour, press  to apply and enter minute setting;

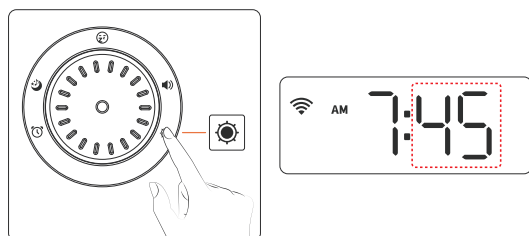

③ Rotate  to adjust minutes, click  to make confirmation, enter the selection of 12/24H time mode;



④ Rotate  to adjust time system, click  confirm and complete the time setting.

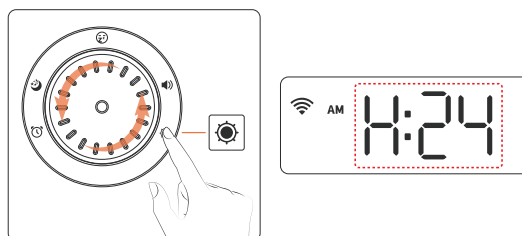

2. Brightness control


When the external power supply is on, click  to adjust the brightness of the time display.

① Support to choose 5 kinds of display brightness: 40%, 70%, 100% OFF, 10%, ; the device light status changes with the choice of APP.


② The default brightness is 40% at the first boot.



40%



70%



100%




OFF




10%

Alarm Clock

1. Turn on/off alarm

① Under time-display interface, press  to turn on alarm clock. the flashing digital lights indicates the alarm time, corresponding alarm clock icon stays solid.




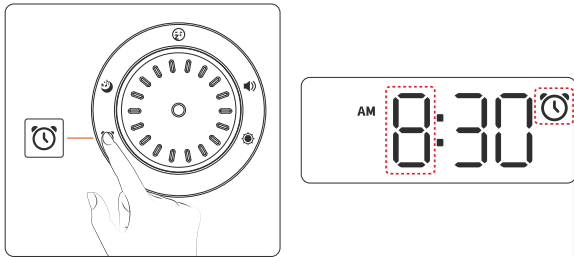
② After turning on the alarm clock, press  to turn off the alarm clock, corresponding alarm clock icon turns off as well.






Attention: Machine can set week-day alarms and weekend-alarms via Huem App directly.



ALARM SETTING


① Under time-display interface, press and hold  to enter alarm setting mode, alarm icon flashes;

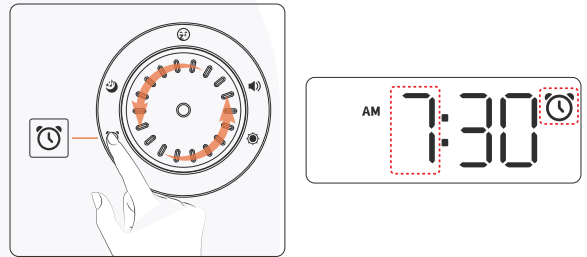


② Rotate  to change the hour, press  to apply and enter minute setting;



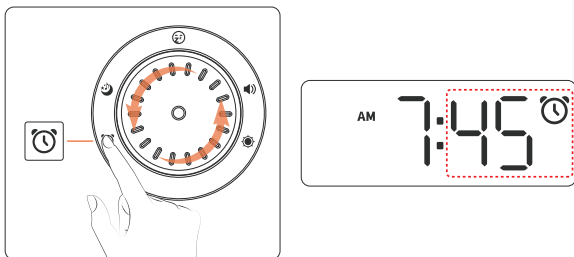


③ Rotate  to change the minute, press  to complete the time setting and enter the alarm sound selecting;





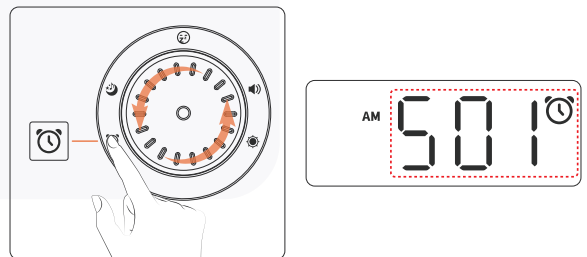
④ Rotate  to select the alarm sound (S-01 to S-05 are snooze sounds) . press  to apply and complete alarm setting;



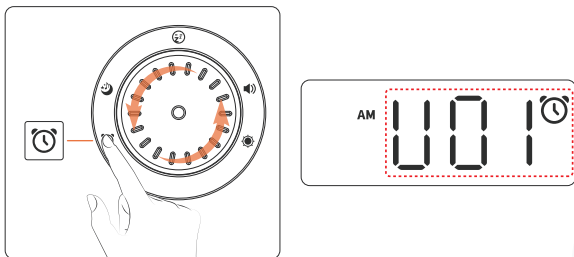

⑤ Rotate  to adjust the alarm volume level (the level of alarm volume is from U-01 to U-10), click  to make confirmation and enter the selection of lighting effect in advance ;




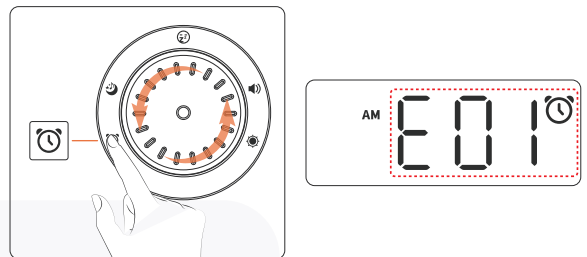

⑥ Rotate  to set the lighting effect in advance (11 kinds of lighting effects from E-01 to E-11 are optional), click  to make confirmation and enter the light brightness settings ;





Attention: After setting the alarm light mode, the selected light effect in the lamp function light mode can change the alarm light effect.

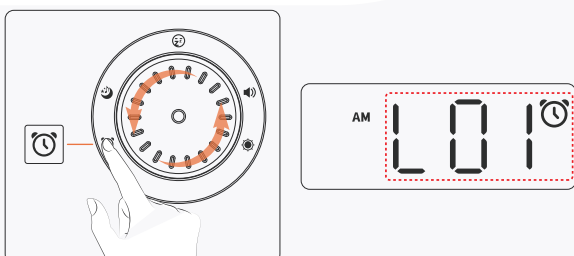⑦ Rotate  to adjust the light brightness (8 levels of light brightness from L-01 to L-08), click  to make confirmation and enter the setting of the lighting time in advance ;



⑧ Rotate  to adjust the lighting time in advance (the time is set from 005 to 120 minutes), click  to confirm and complete the alarm clock setting.

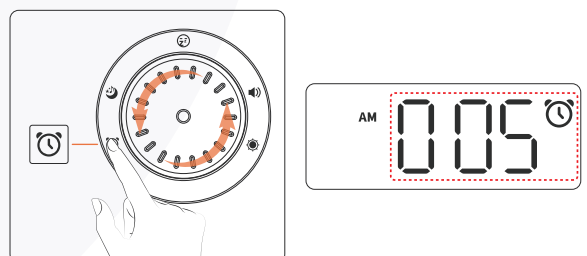




Attention: The light set by the alarm clock can be turned on in advance and long press  (3S) to turn off the light.



SNOOZE


(gives you multiple 9-minute naps before completely waking up)

Activate/deactivate snooze mode

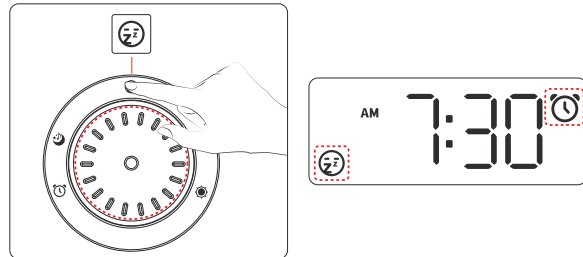


① During the alarm beeping, press  /  to enter snooze mode (alarm sound pause for 9 minutes), light digits flash. You can enter snooze mode repeatedly up to 5 times;

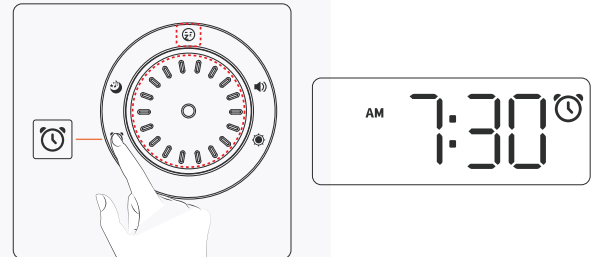



② Under snooze mode, press the corresponding alarm clock  /  to exit;




* You can also gently push down/ set upright the device during the snooze to switch on snooze mode.

* During the alarm beeping, press  /  /  to stop.

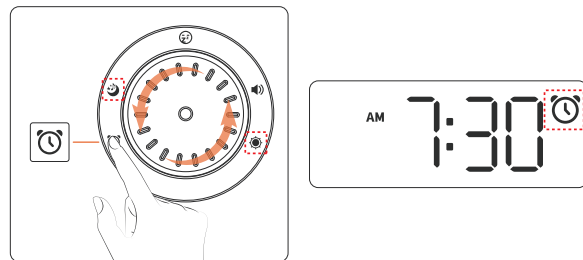


③ Double-press  to shut down the alarm completely.

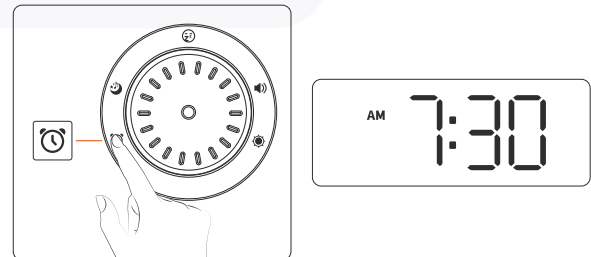


Attention: The alarm gets automatically shut down completely after 30 minutes of beeping without any operation on machine.


Sleep-aid mode

1. Activate/deactivate sleep-aid mode

① Under time-display interface, press  to turn on sleep-aid, the preset duration of sleep-aid mode off-timer will be displayed for 3 seconds with sleep-aid icon stay solid;

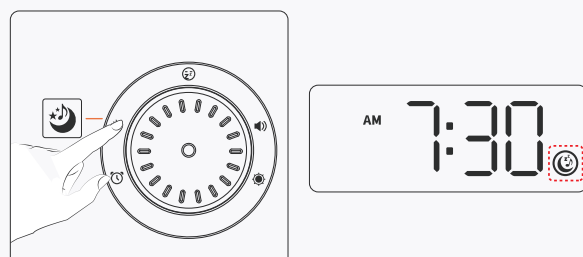


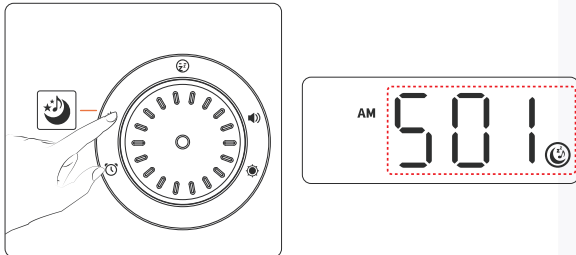
② Press  /  to deactivate sleep-aid mode, with sleep-aid icon turns off.

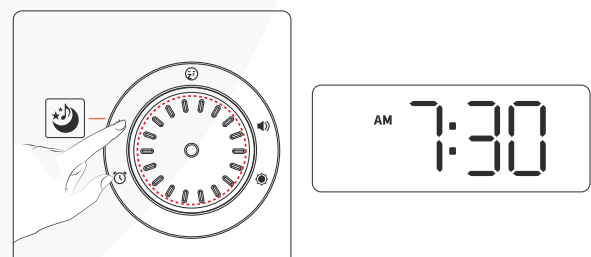




SNOOZE



2. Sleep-aid settings


① Under time-display interface, press and hold  to enter sleep-aid setting mode, sleep-aid icon flashes.



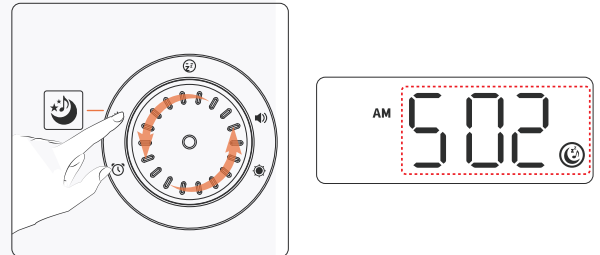


② Rotate  to select sleep-aid sound (S-01 to S-11 are sleep-aid white noise simulating great nature sounds), press  to apply and enter light brightness control;



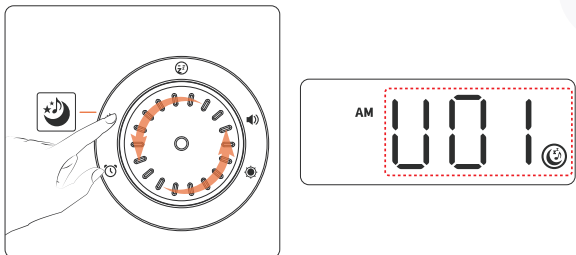

③ Rotate  to set the sleep-aiding volume level (the level of sleep-aiding volume is from U-01 to U-10), click  key to make confirmation and enter the selection of sleep-aiding light effect;




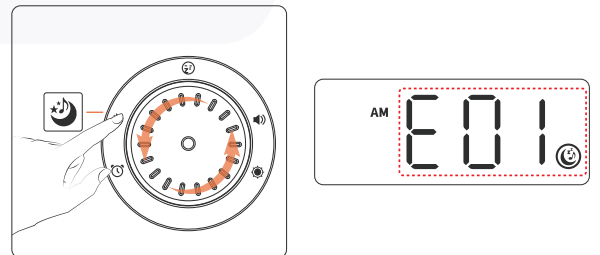

④ Rotate  to set the sleep-aiding light effect (10 kinds of light effects from E-01 to E-10 are optional.), click the  key to make confirmation and enter the light brightness settings;




Attention: after setting the sleep aid light mode, the selected light effect in the light function mode can change the sleep aid light effect.

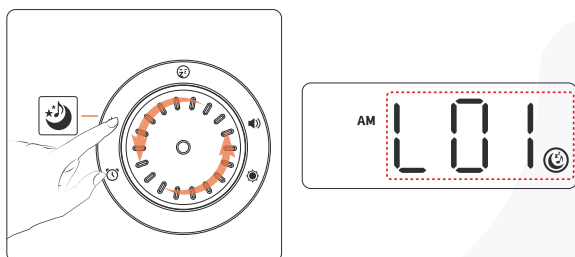

⑤ Rotate  to adjust the light brightness. (8 levels of light brightness are from L-01 to L-08), click  to make confirmation and enter the setting of light sleep-aiding time;





⑥ Rotate  to adjust the sleep-aid mode duration (from 5 to 120 minutes, 30 minutes by default), press  to apply and activate sleep-aid mode.

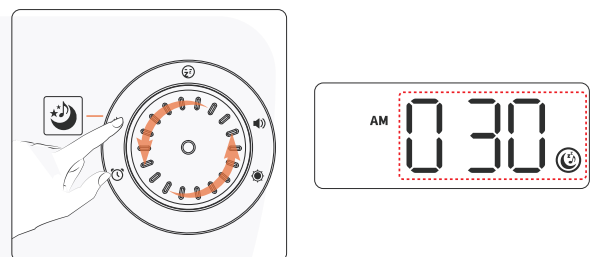

Volume adjustment function


When the alarm or sleep-aiding sound rings, click  to turn on the volume adjustment function, and rotate  to adjust the volume level.


Attention: When the alarm or sleep-aiding sound rings, you can rotate  to adjust the preset light brightness.








COLOR LIGHT FUNCTION

1. Turn the color light on / off


① When the external power supply is on, click  (The default brightness is at the level of 8)


② When the light is on, long press  for 3 seconds to turn off the color light.







Attention: When the color light is on, click  to adjust the brightness of the time display or turn off the time display.

2. Brightness adjustment

① When the light is on, rotate  clockwise to turn it up.


② When the light is on, rotate  anticlockwise to turn it down.





3. Light effect switching

Lighting effect switching operation, see the figure below for details.


When the light is on, take light effect switching operations of Type ① and Type ② as example:

Click : Click to jump from Type ① to Type ②.

Double-click : Assuming that the device is in the case of the light effect of Type ①, double-click  to circularly switch the light effects in Type ①.


* Custom colors in ① can be set in APP. Please refer to APP function introduction-Lantern Mode

Attention: This product has a memory function, and each change on light effect will be used as the default light effect later.

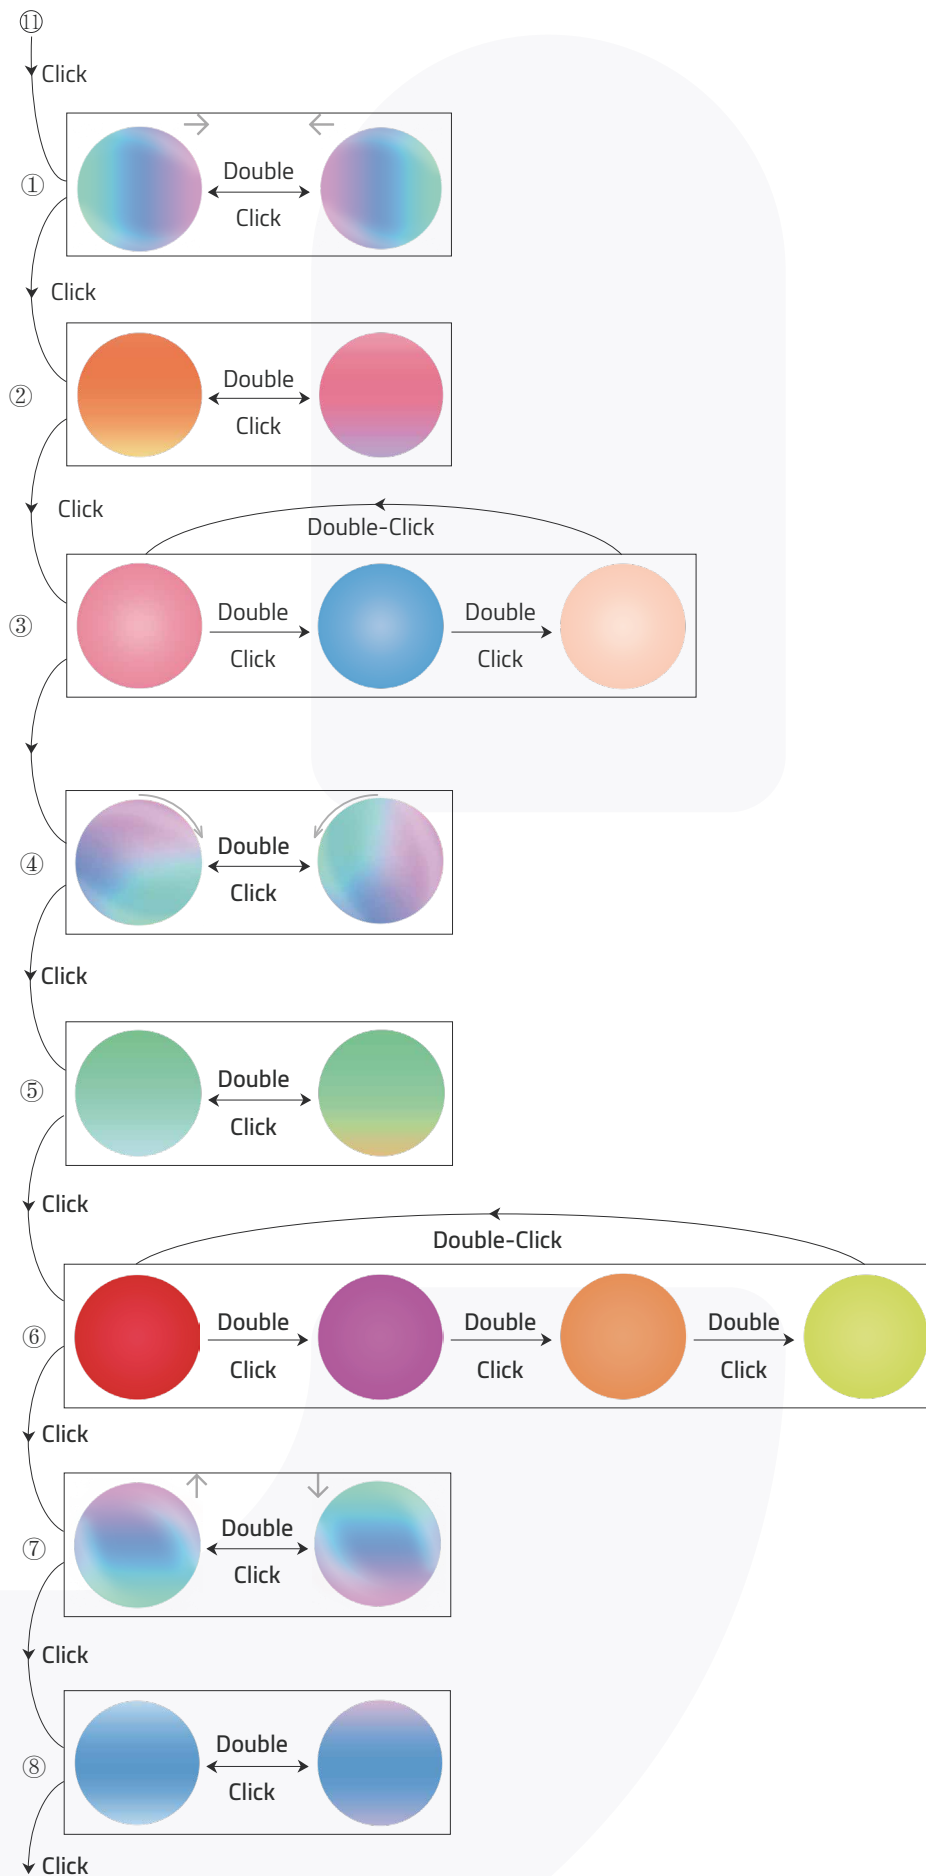

FAQ

1. The device cannot be connected?

- ① Please put the router, equipment and mobile phone in the same area; please be as close as possible.
- ② Please make sure that the Wi-Fi signal in your area is normal. (only 2.4G Wi-Fi network is supported)
- ③ Please press  for a long time to re-enter the distribution network mode and try to connect to the distribution network again.

2. APP can't control the device suddenly?

It could be the network or the device is offline.

- ① Please make sure that the device is powered on.
- ② Please make sure that the connected Wi-Fi signal is normal (only 2.4G Wi-Fi network is supported). It is recommended that you keep the APP on for about 3 minutes to see if the device is still online.
- ③ If you are still online, please place your phone next to the device, then connect to the same Wi-Fi, as the device and try to open the web page to see if it is smooth to determine the condition of the network.
- ④ Exit the application in the background of the phone, then open the application again, and then try again.

3. How to reset Wi-Fi?

When the light is turned off and connected to the power supply, press the button for a long time until the device blinks.

4. The device status cannot be synchronized with the display status on the APP?

- ① Please make sure that the device is connected to the Internet
- ② After operating the device using APP, check to see if the device status is synchronized with the display status on the APP.

5. After the device is connected to the Internet, it can be controlled in the same location, but the mobile phone can not be remotely controlled by another address or other network.

- ① Please make sure that the device is connected to the Internet.
- ② After operating the device using APP, check to see if the device status is synchronized with the display status on the APP.

6. Others

If the device is correctly connected to the network and the above problems still occur, please enter the main page of the device APP, click "✎" in the upper right corner, enter the "FAQ and feedback" page, click "Continue to feedback", enter the problem you encountered and submit it.

NOTES

- Please wipe this product with a soft cloth.
- Do not scrub this product with abrasive cleaning agents, rough chemicals, alcohol, acetone cleaning agents, etc., so as not to damage the surface of the product.
- Store the product in a safe, dry place that will not be overstocked, bruised or damaged.
- Do not wrap the power cord around the appliance when storing the product.
- Please use the included power adapter (5V-2A) to avoid damage to the equipment.
- Please use this product correctly according to the instructions. Disassembly and collision of this product are strictly prohibited.
- Please place the product on a stable horizontal surface and a non-smooth surface.
- Do not use it in high temperature, humidity or corrosive environment, so as to avoid leakage caused by circuit damage.
- Please take good care of it and don't let children use electrical equipment as toys to avoid accidents.
- This product is not fireproof, please do not throw it into the fire, do not go near the source of fire.
- This product is not waterproof, please do not put it into the water, so as not to damage the equipment.