


LED COB Strip Light


NR-ST24COB-480-13 Series
IP20



Model No	Watt	lm/w	Total Lumen	Cutting	Length	LED QTY	CCT
NR-ST24COB-480-13 WW	13W/M	85lm/w	1105lm/m	45.45mm	10m/Roll	528Pcs/m	3000K
NR-ST24COB-480-13 DW	13W/M	90lm/w	1170lm/m	45.45mm	10m/Roll	528Pcs/m	4000K

ACCESSORIES

Picture	Model No	Rated Power	Input Voltage	Rated Current	The Number Of Poles	Material	Dimensions in mm	kg
	NRP-ST24-COB-ONE-CONNECT	144W	DC24V	6A	2P	PVC+Copper	115*9.5*4	0.002
	NRP-ST24-COB-JOIN	144W	DC24V	6A	2P	PC+Copper	15.8*9.6* 3.3	0.001

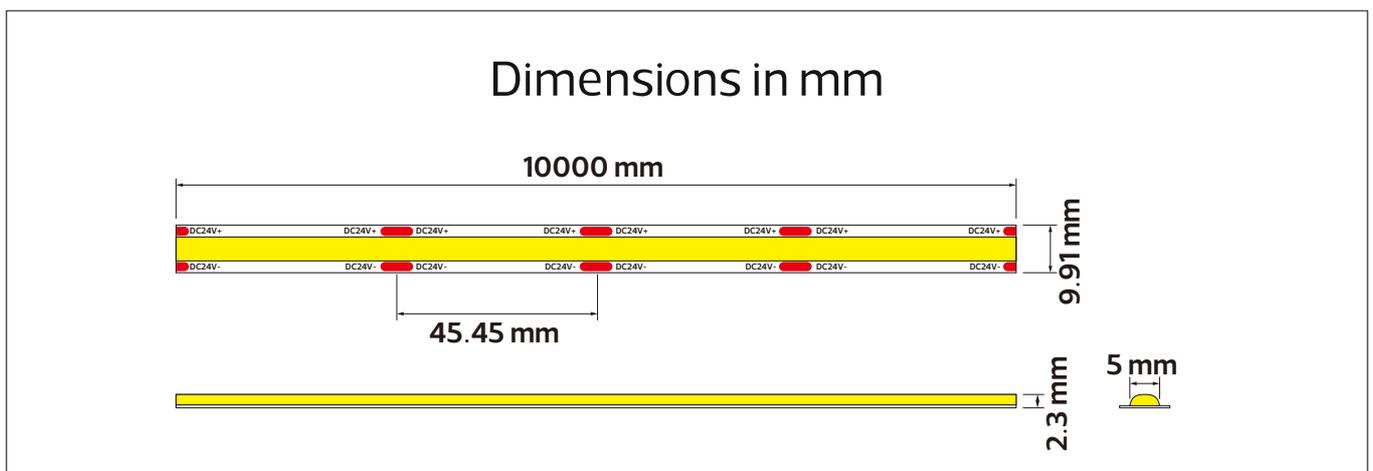

LED STRIP POWER SUPPLY

Item Code	Input Voltage(AC)	Input Current(A)	Output Voltage(DC)	Output Current(A)	IP	Watt
NR-PS-60W	100-240V	0.6A	24V	2.5A	20	60
NR-PS102-24V-60W	100-240V	0.6A	24V	2.5A	20	60
NR-PS102-24V-60-IP65	100-240V	0.6A	24V	2.5A	65	60
NR-PS-100W	100-240V	1A	24V	4.2A	20	100
NR-PS102-24-150W	100-240V	1.5A	24V	6.3A	20	150
NR-PS-150W	100-240V	1.5A	24V	6.2A	20	150
NR-PS-360W	100-240V	3.6A	24V	15A	20	360



NOTE:the power supply should not exceed 80% of the rated power for long periods of time!



NR-PS-60W



NR-PS102-24V-60W



NR-PS102-24V-60-IP65



NR-PS-100W



NR-PS102-24-150W










NR-PS-150W




NR-PS-360W

RECOMMENDED SPARE PARTS

Aluminium Profile

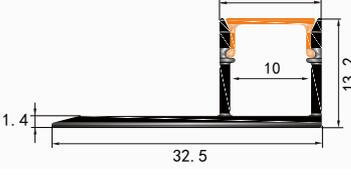Picture	Item Code	Cross section dimension in mm	Match LED strip lights size
	NR-355		Max 12mm
	NR-XT-210		Max 12mm
	XT-226		Max 10mm
	XT-263		Max 12mm
	XT-283		Max 10mm
	PXG-506		Max 8mm
	PXG-618		Max 12mm


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

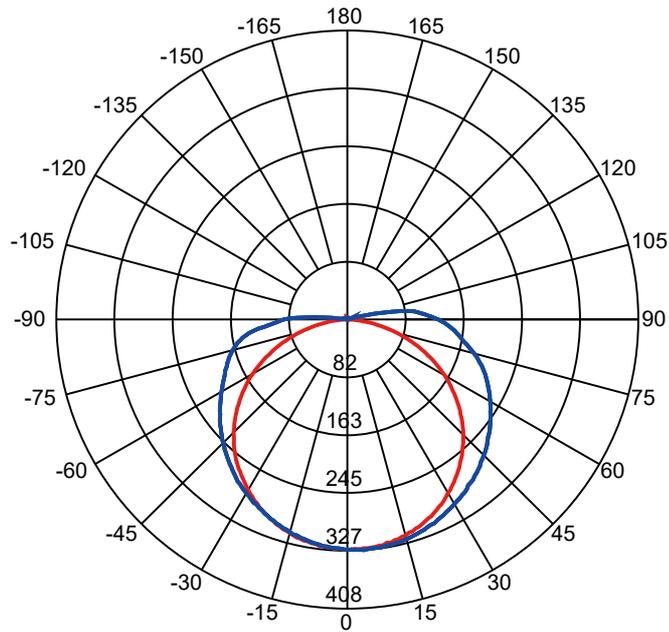

Beam Angle(50%) C0-180,C90-270: 117.3 deg,156.3 deg


C0-180 ——— C90-270 ———

Illuminance at a Distance

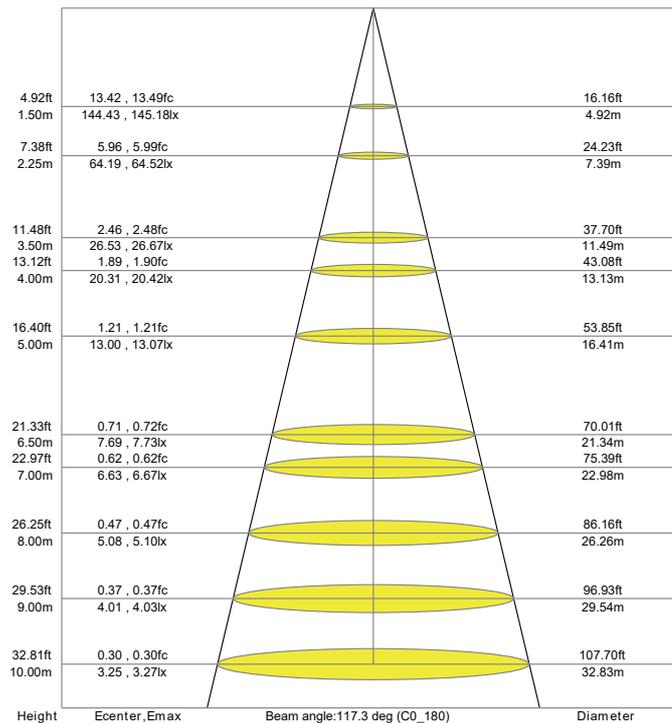

Model No:NR-ST24COB-480-13 WW


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

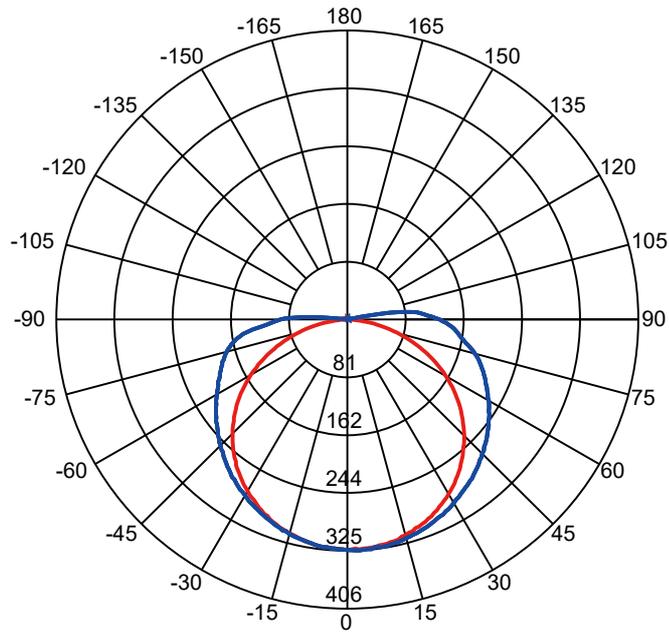


Beam Angle(50%) C0-180,C90-270: 118.2 deg,159.1 deg

C0-180 ——— C90-270 ———


Illuminance at a Distance

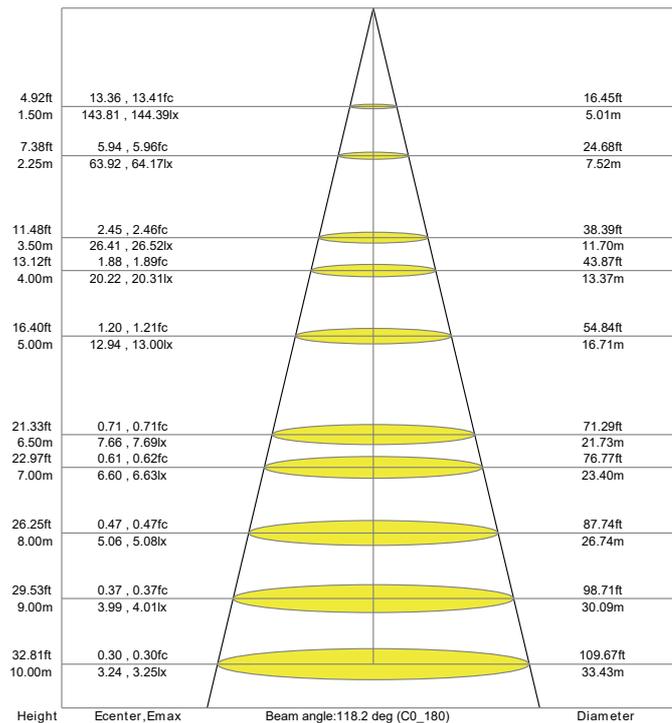

Model No:NR-ST24COB-480-13 DW

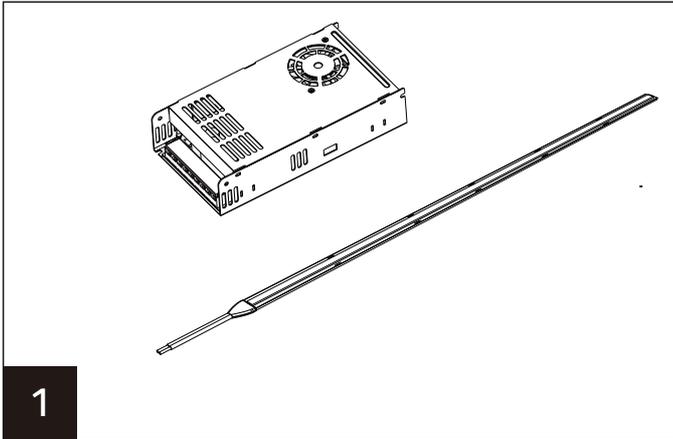


1

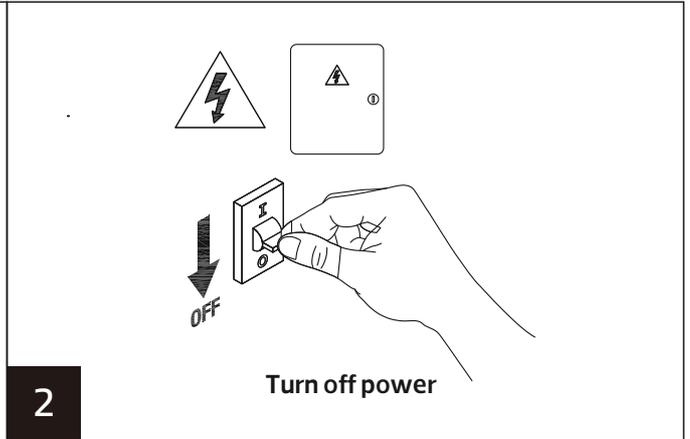


2

Turn off power

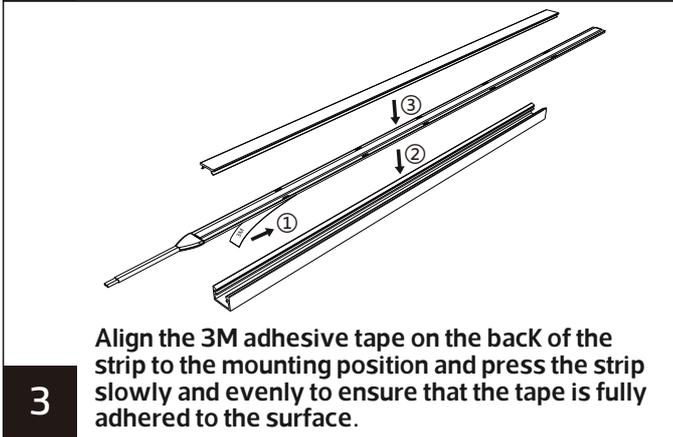


3

Align the 3M adhesive tape on the back of the strip to the mounting position and press the strip slowly and evenly to ensure that the tape is fully adhered to the surface.

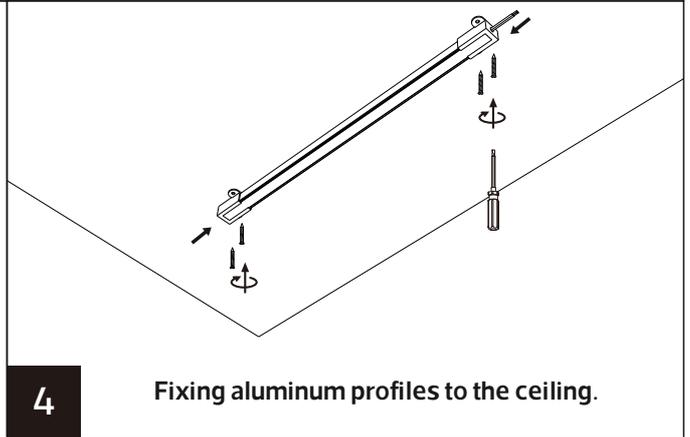


4

Fixing aluminum profiles to the ceiling.

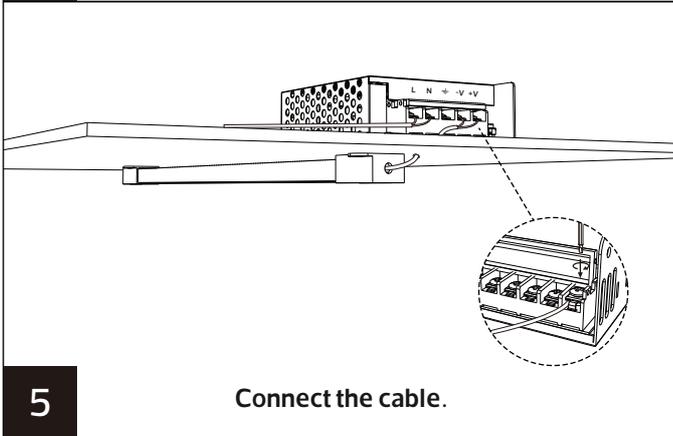


5

Connect the cable.

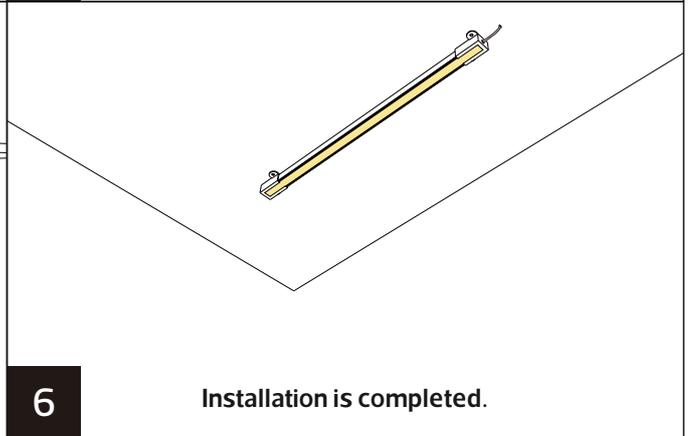

6

Installation is completed.

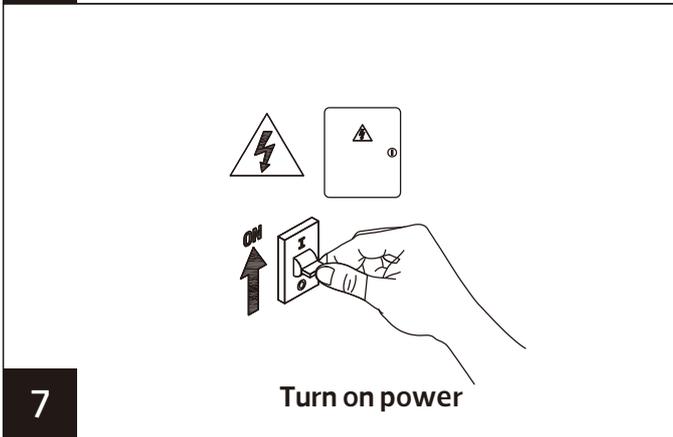

7

Turn on power

