



LED SURFACE PANEL LIGHT GL-PL102 Series




Specifications	Watt	lm/W	Output (lm)	ΦA	B	
GL-PL102-10	10	75	750	125	45	0.14
GL-PL102-20	20	80	1600	175	45	0.24
GL-PL102-30	30	80	2400	230	45	0.35
GL-PL102-40	40	80	3200	305	45	0.58

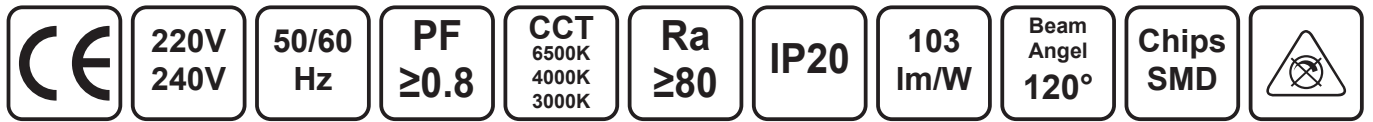

Dimensions in mm



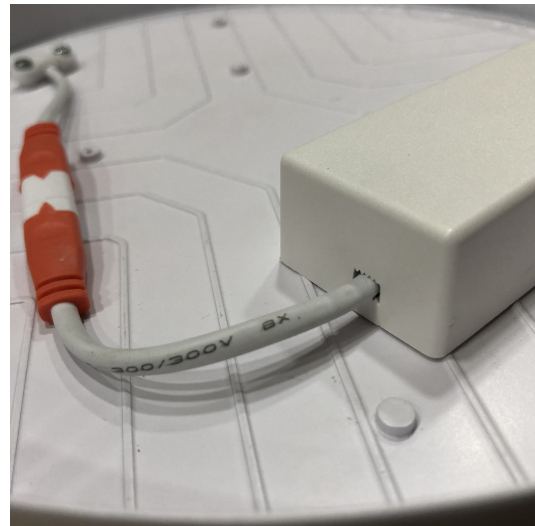

Description:
LED Surface Panel Light

Main material:




Die-cast aluminum+engineering plastic and comfortable light.
if the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.


Specification:

Energy saving, upto 85% energy saving comparing to standard halogen and incandescent lamps Long life, upto 30,000 hours
High quality light, high color rendering, less heat, no UV or IR radiation
Terminal block not included. Installation must be performed by a qualified person.
Terminal block shall conform to EN 60998-2-1 or EN 60998-2-2.
Plastic box: class II, IP20 or better



Applications

Shopping mall
Office buildings
exhibition hall

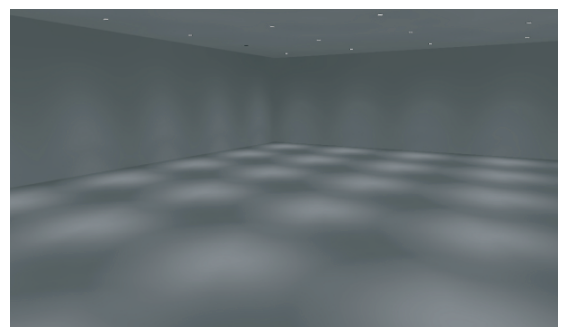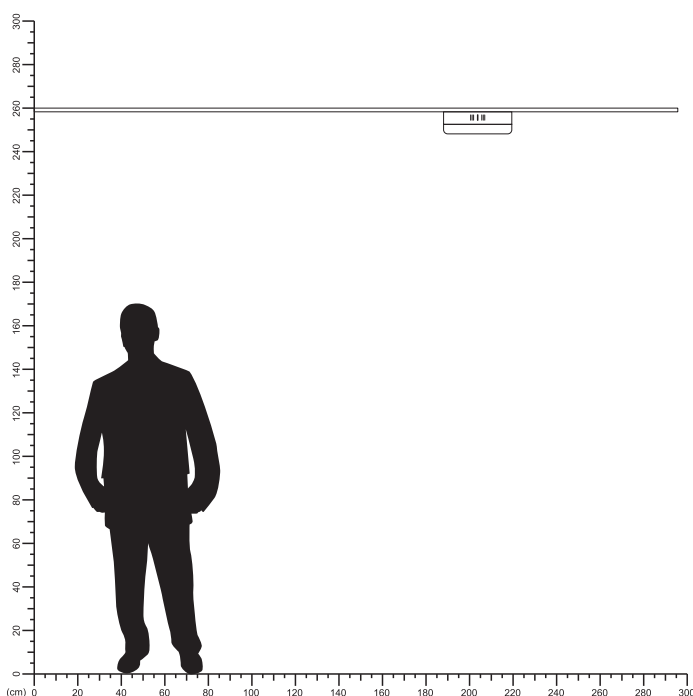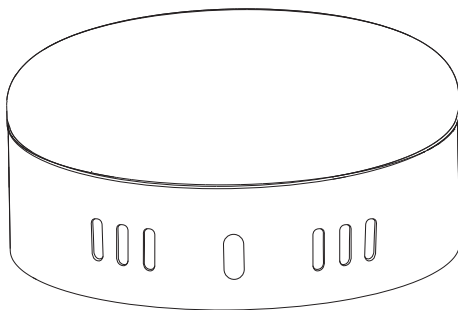






A

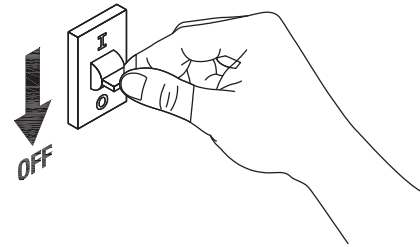


1




2




3



4

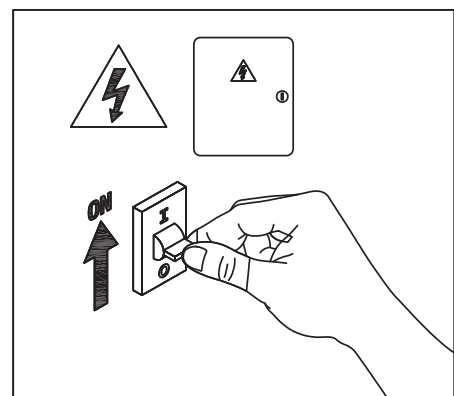

5



6