



2835-S
LED ROPE LIGHT
220V 5060/Hz






SMD	60 lm/w		220V 240V	50Hz 60Hz	CCT 3000k 4000k 6000k	IP65	ta 40°C	Max 40°C Min 0°C	CRI >70	Life time 30,000h	Beam angle 120°	PF 0.9
-----	------------	--	--------------	--------------	--------------------------------	------	------------	---------------------------	------------	-------------------------	-----------------------	-----------


Specifications	P (W/M)	Output (lm)	IP	A	B	C	D
GL-ST102	6w/m	50lm/w	IP65	50m	14mm	9mm	1m
GL-ST103	6w/m	65lm/w	IP65	50m	16mm	11mm	1m




Dimensions in mm

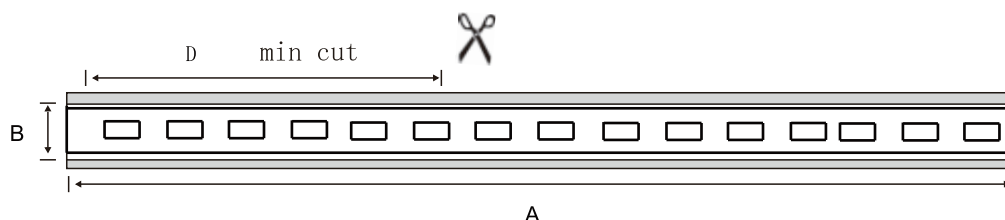

Luminous Intensity Distribution Curve

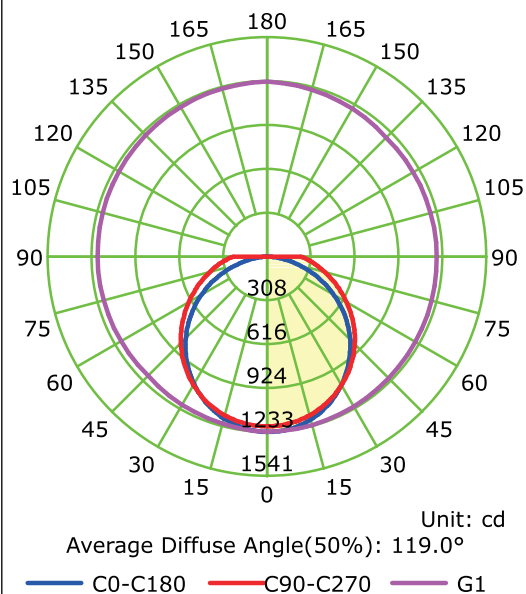

Illuminance at a Distance

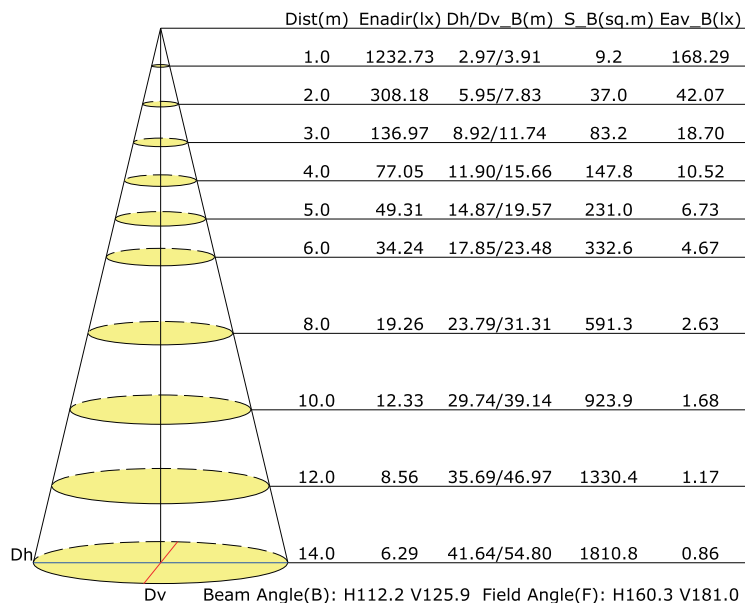



Description:
LED ROPE LIGHT

Main material:
aluminum+PC cover
engineering plastic High quality aluminum
spherical reflector for soft and comfortable
light.


Specification:
Energy saving, up to 85% energy saving
comparing to standard halogen and
incandescent lamps
Long life, up to 50,000 hours
High quality light, high color
rendering, less heat, no UV or IR radiation

Applications
Shopping mall
Office buildings, exhibition hall
and so on public lighting places
. Domestic

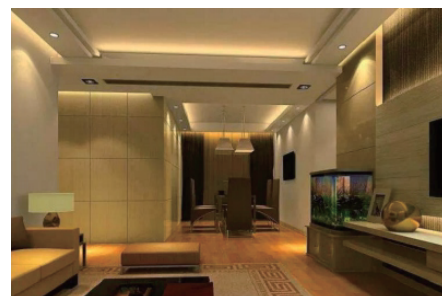


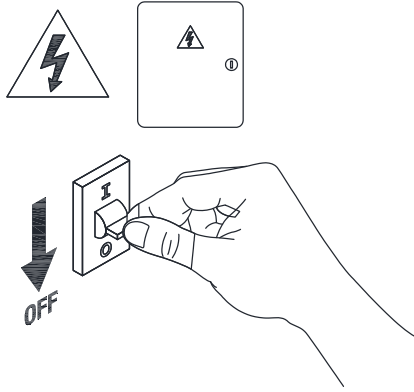



1a

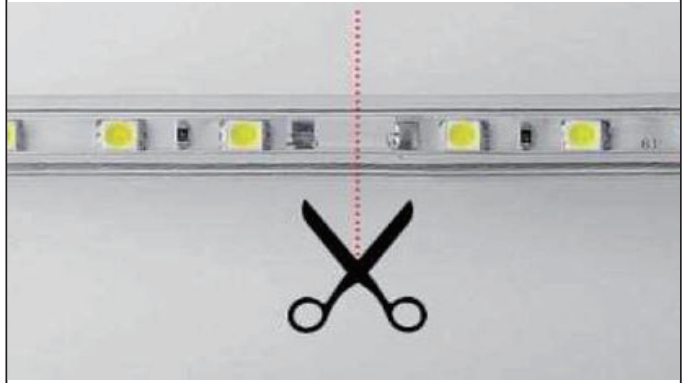


1b

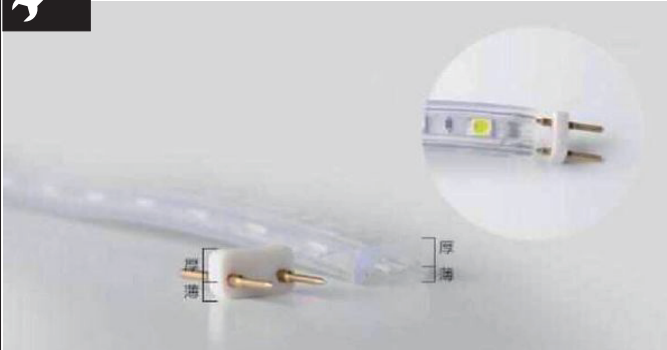


2

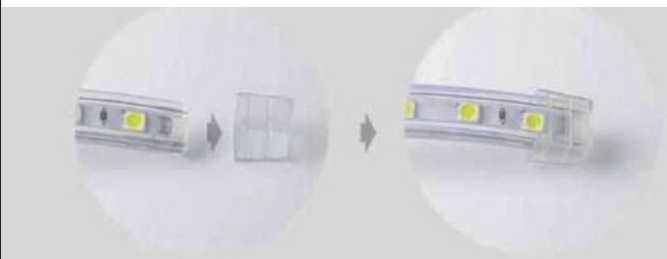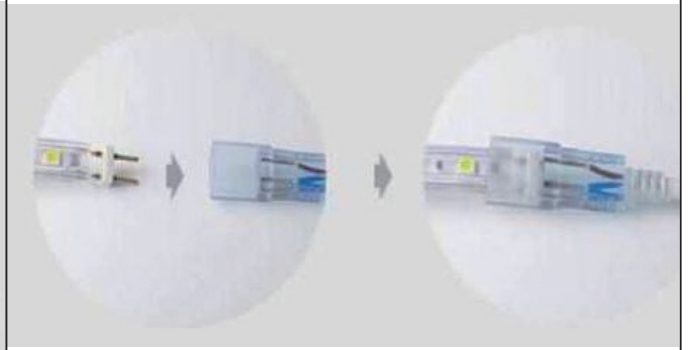

3

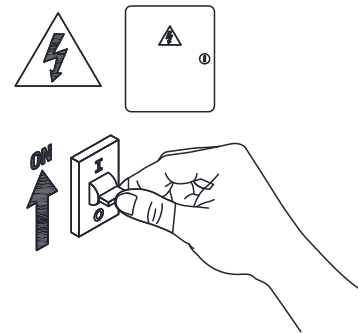

4

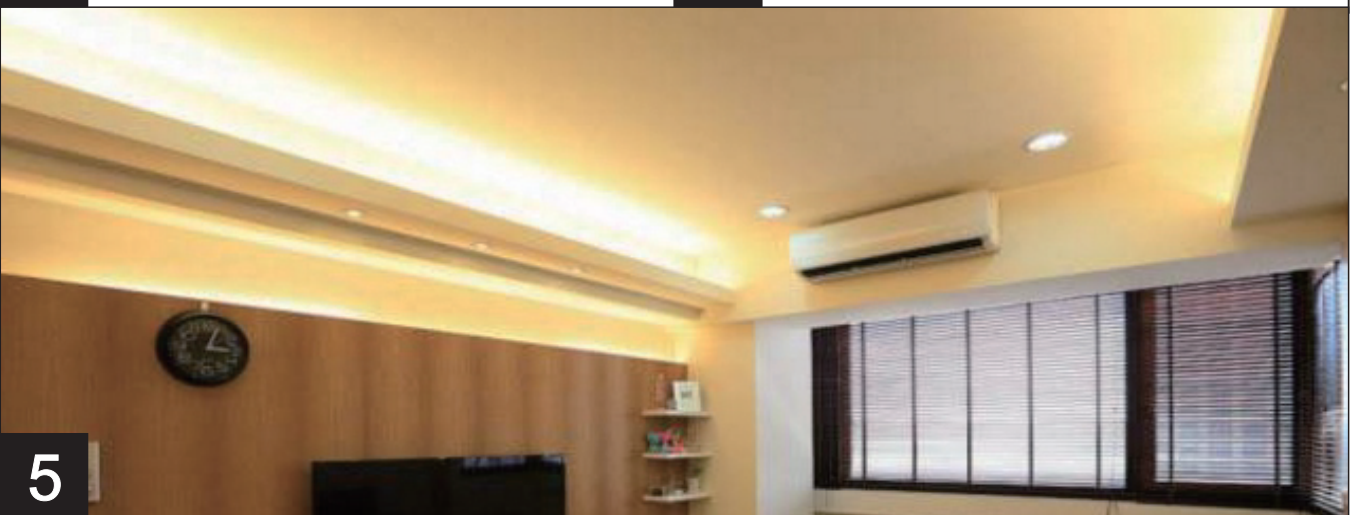

5