


Human Body Infrared Sensor Switch

NR-HSR-05




Item Code	NR-HSR-05
Load Power	Incandescent Lamp≤500W/LED≤100W
Input Voltage	AC180-220V 50/60Hz
Detection Angle	120°
Induction Distance	2-6m
Induction Delay	45s
Working of illumination	10 Lux
Installation Height	Max 4m
Waterproofing Grade	IP20
Working Temperature	-20°C~45°C
Product Size	84*38*29mm
Applicable Products	LED Downlight, Spotlight, Panel Light, Ceiling Light
Application Places	Stairs, Hallways, Bathrooms, Garages, Basements, Etc

Dimensions in mm

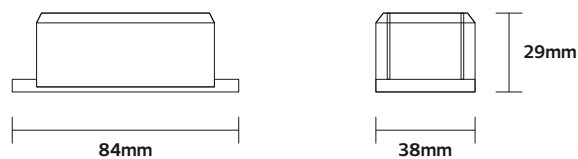

Product Overview

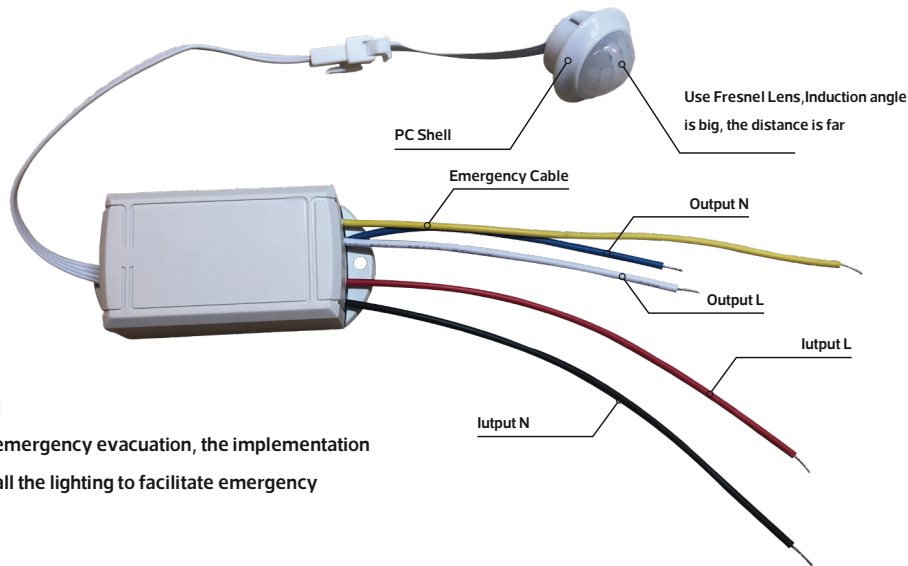


Emergency Cable:

When there is a fire or emergency evacuation, the implementation of forced start, turn on all the lighting to facilitate emergency evacuation.

Functional Characteristics

Using infrared pyroelectric sensor, integrated circuit chip and advanced production technology, stable and reliable performance. when someone enters the detection range of this product and triggers its action, the infrared sensor will work to light the lamp, and when the person leaves the detection range, the lamp will automatically go out.

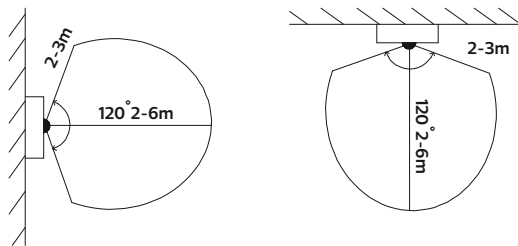

Wire Diagram

