

## LED Outdoor Wall Lamp

H7031


IP65






Outdoor	AC 220-240V	50/60 Hz	PF ≥0.7	CCT 3000K	Ra ≥80	IP65	Beam Angel 100°	Chips SMD	
---------	----------------	-------------	------------	--------------	-----------	------	-----------------------	--------------	--

Item Code	P (W)	CCT (K)	Beam angle	Output (lm)	lm/w	Dimensions in mm			kg
						A	B	C	
H7031	10	3000	100°	650	65	307	89	307	0.66
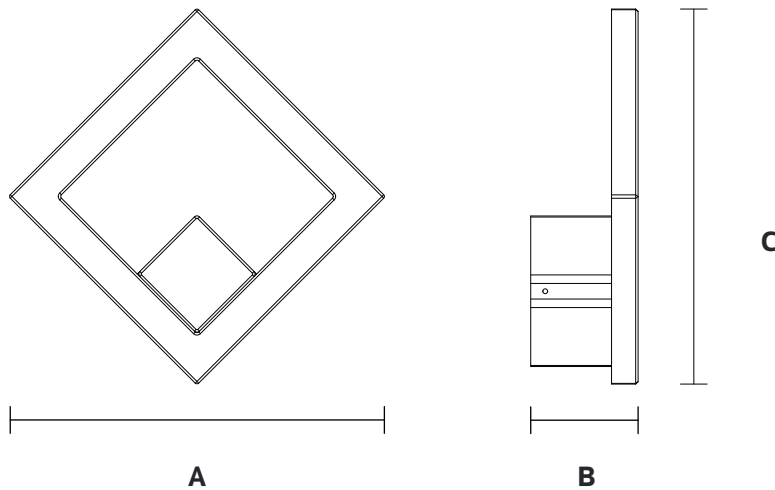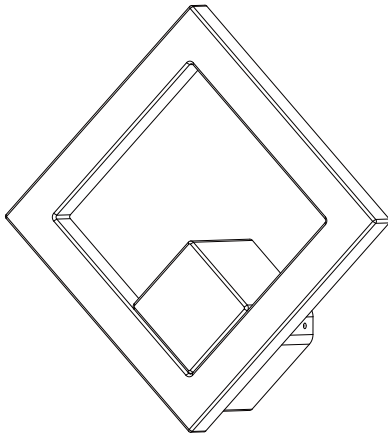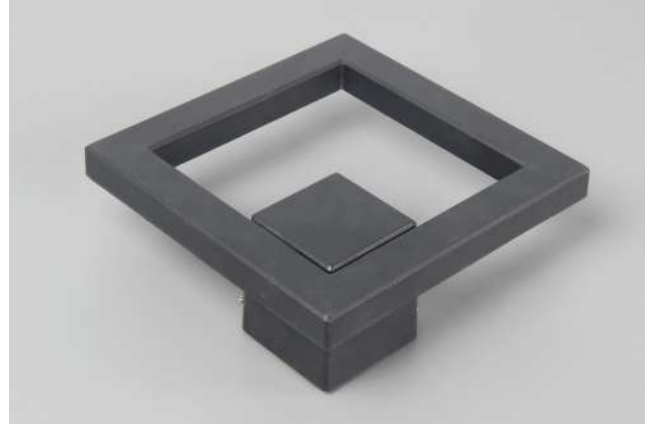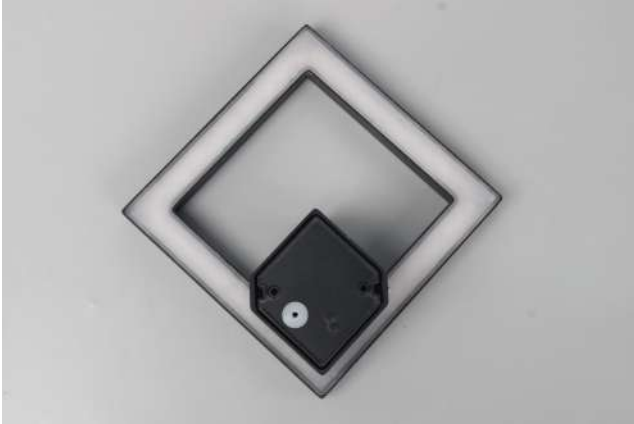
### Dimensions in mm






**Description:**  
LED Outdoor Wall Lamp

**Main material:**  
Aluminum+Engineering plastics


**Specification**  
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps  
High quality light, high color rendering, less heat, no UV or IR radiation  
Build-in LED Driver  
IP65

**Applications**  

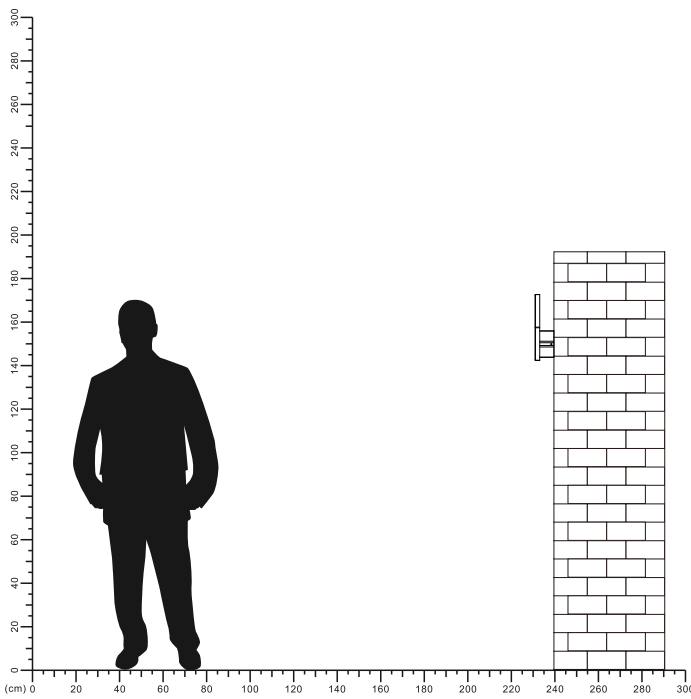
- . Park
- . Square
- . Tourist attraction
- . Corridor











# LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

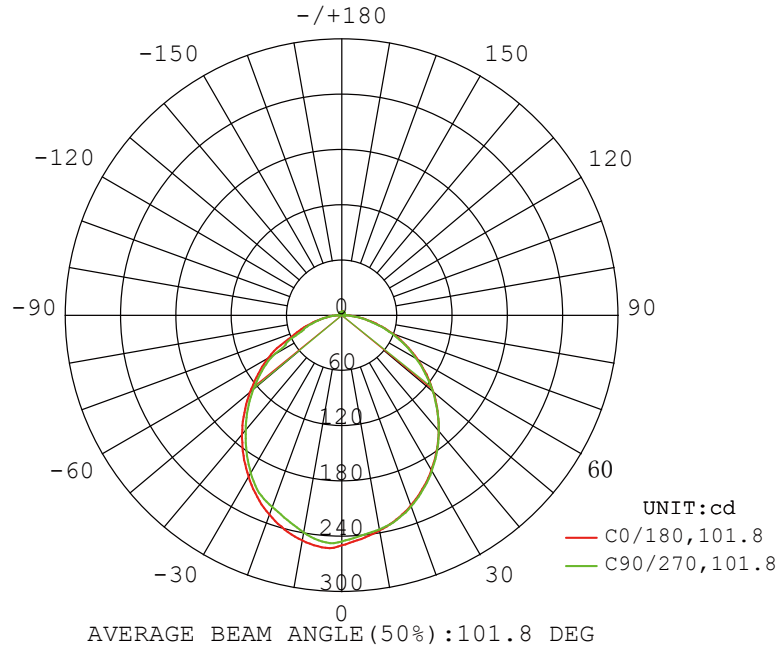

## Illuminance at a Distance

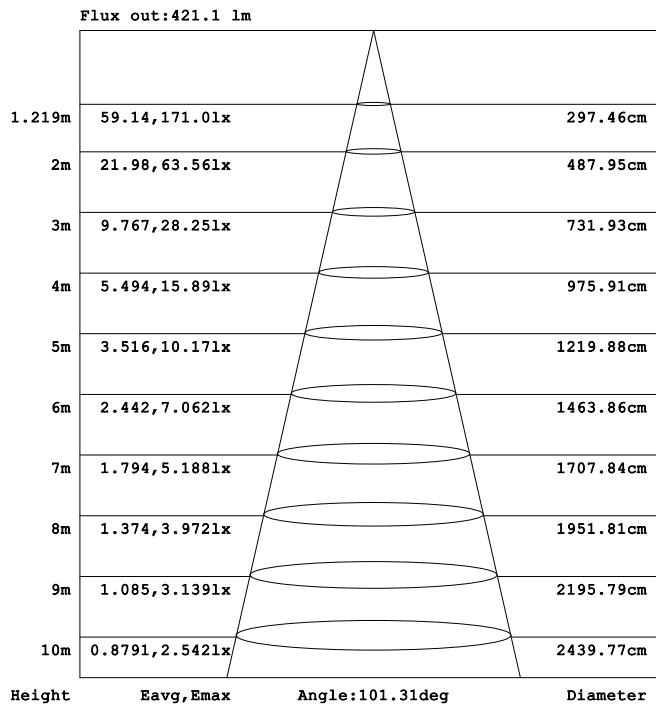

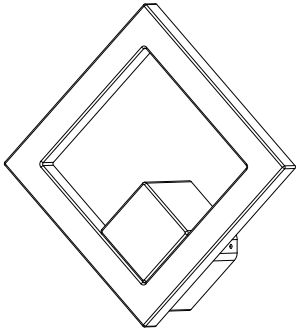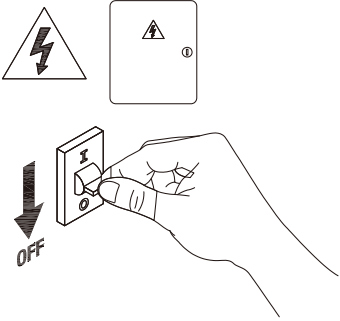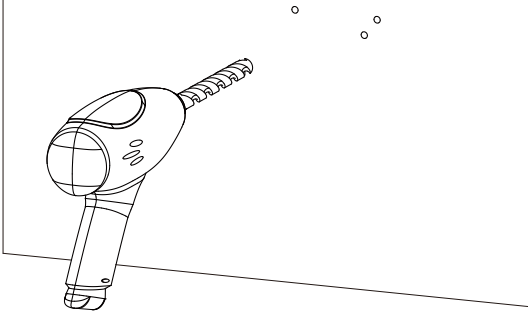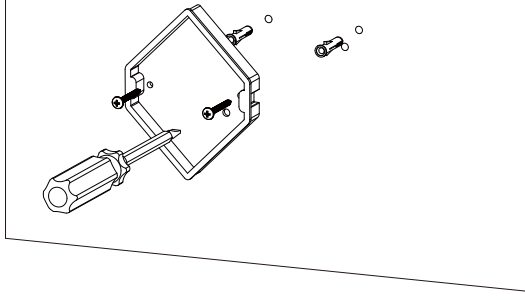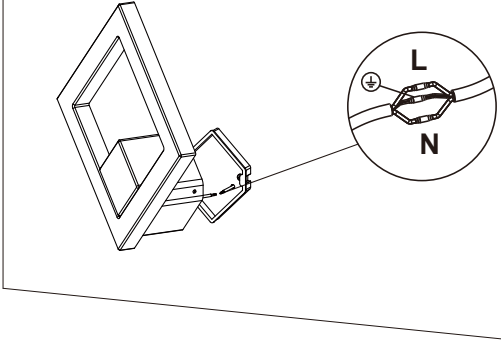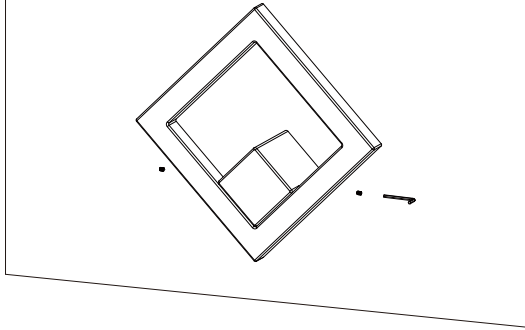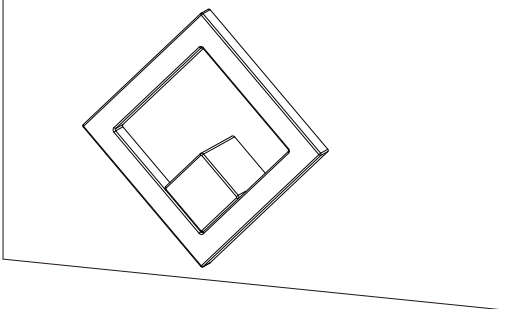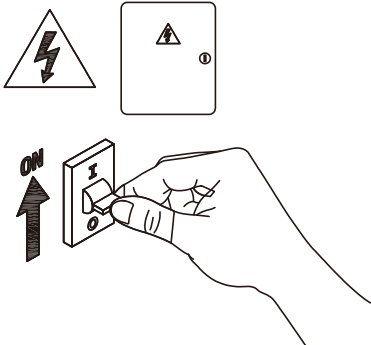Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

 <p><b>1</b></p>	 <p><b>2</b> Turn off the power</p>
 <p><b>3</b> Drill 3 hole in your wall</p>	 <p><b>4</b> Fix the base</p>
 <p><b>5</b> Connect the cable</p>	 <p><b>6</b> Fix the lamp body</p>
 <p><b>7</b> Installation completed</p>	 <p><b>8</b> Turn on power</p>

