




LED COB STRIP LIGHT

NR-ST220-COB-IP65-9W Series
IP65



Item Code	Body Size	Input Voltage	Watt/M	Lm/M	Max. Length	Beam Angle	CCT
NR-ST220-COB-IP65-9W-3000K	W12x6mm	AC200-240V	9W	666lm	50m	120°	3000K ■
NR-ST220-COB-IP65-9W-4000K	W12x6mm	AC200-240V	9W	666lm	50m	120°	4000K ■

Dimensions in mm

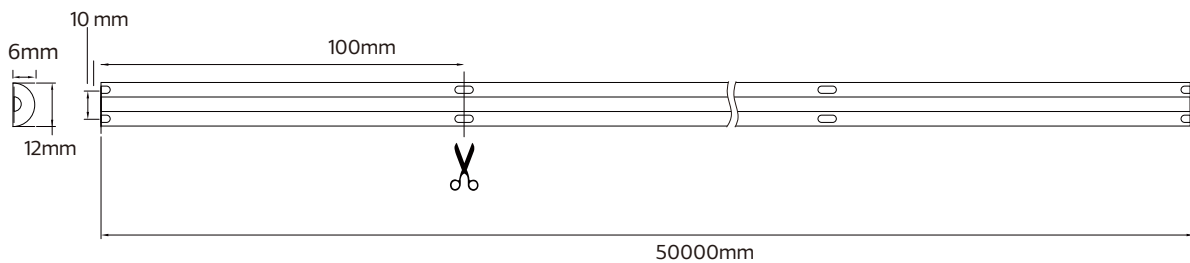


Product Features:

- Stable output
- No stroboscopic
- anti-interference
- IP65
- Stable power supply, longer life




NO	Item Code	power	Input Voltage	PF	Output	Size	Matching series
1	NR-DR220-FliKer-150W-IP65	150W	AC220-240V 50/60Hz	PF≥0.9	226V 0.63A DC	L119xW31.5xH29mm	NR-ST220-COB-IP65-9W Series
2	NR-ST220-CONNECT-IP65	250W	AC220-240V 50/60Hz	PF≥0.9	226V 1.10A DC	L145.8xW42xH33mm	NR-ST220-COB-IP65-9W Series

LED Strip Solution

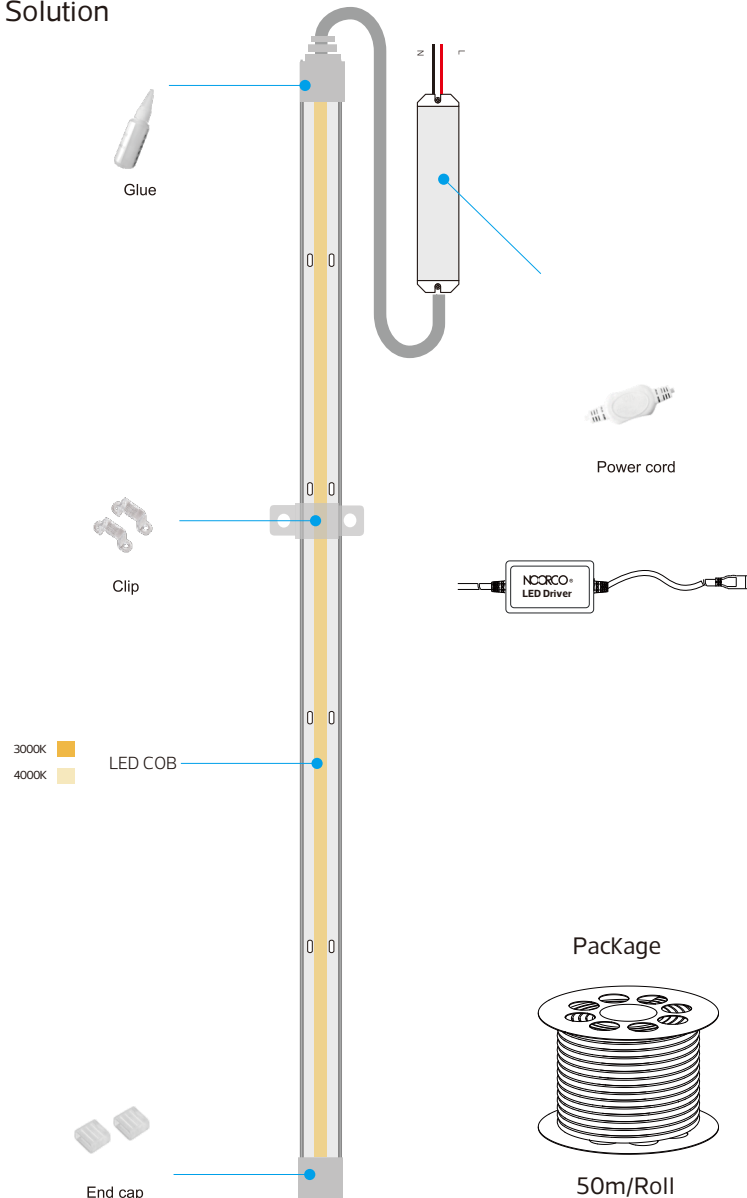


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

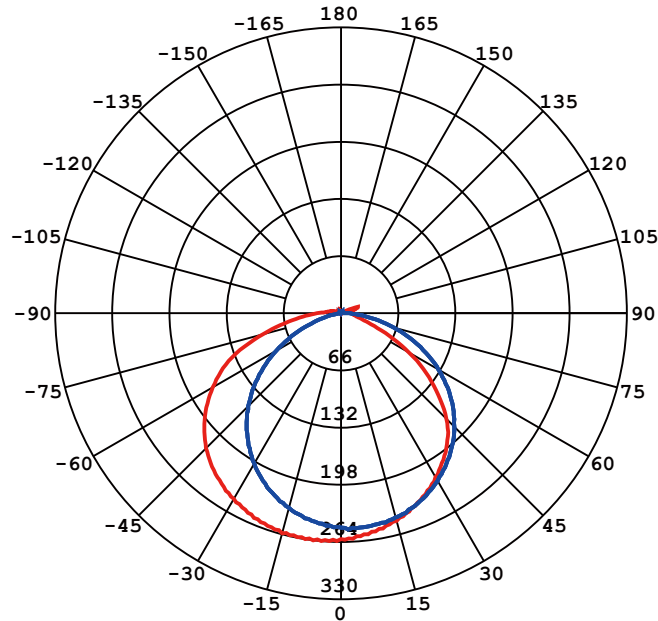

Beam Angle(50%) C0-180,C90-270: 121.4 deg,112.7 deg

C0-180 ——— C90-270 ———



Illuminance at a Distance

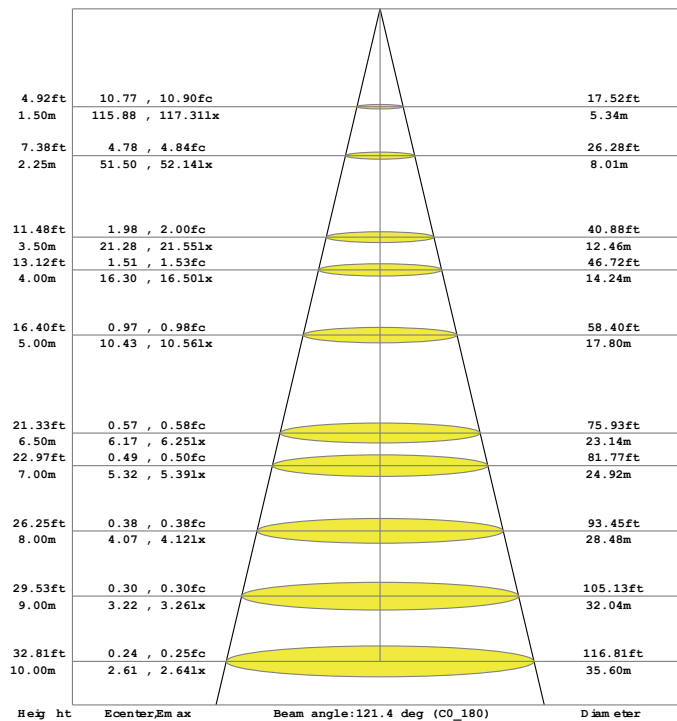


Installation step

⚠ Before finish the installation , do not connect the power

1. According to practical demand , Fix the strip with clip and screws in needed place
(The strip is good flexibility for any shape)

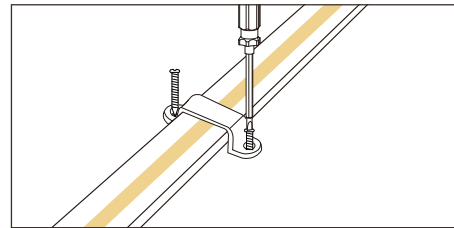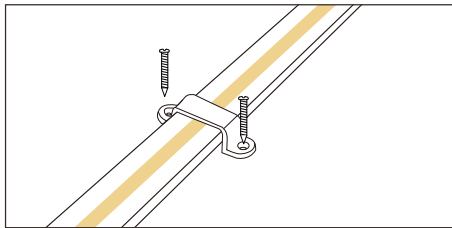


2. Cut the strip according to your requirement (each 100 mm can be cut for 220V strip .)

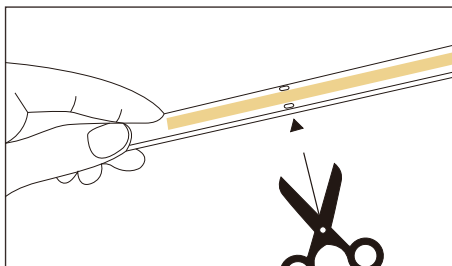


⚠ Detail cutting mark mentioned in next page

3. Close the strip with end cap and glue with the designative glue for safety and waterproof

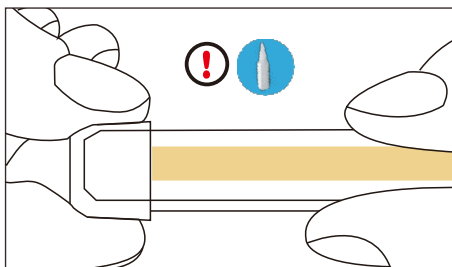

⚠ Must use the designative glue to glue the interface

RoHS 

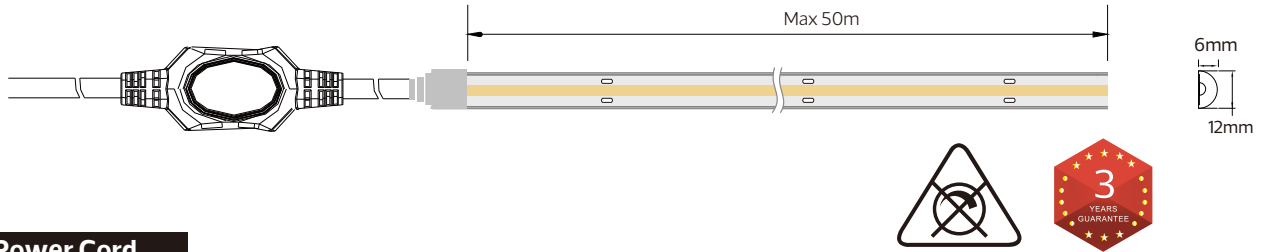

Power Cord installation



Glue



Power cord




Clip



End cap

Accessories

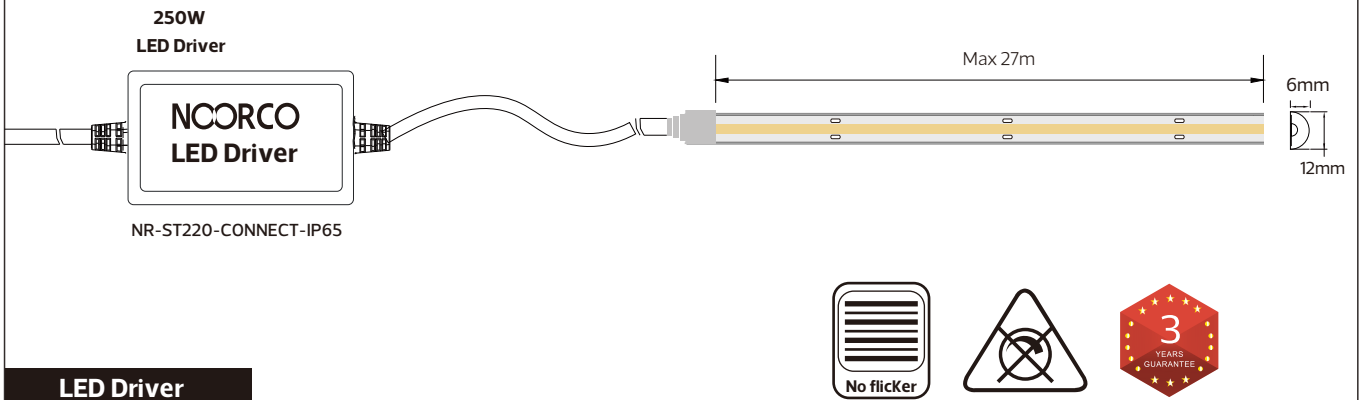

LED Driver installation



Glue



Clip



End cap

LED Driver Accessories