




## LED Outdoor Wall Lamp


HL-5179 Series


IP65

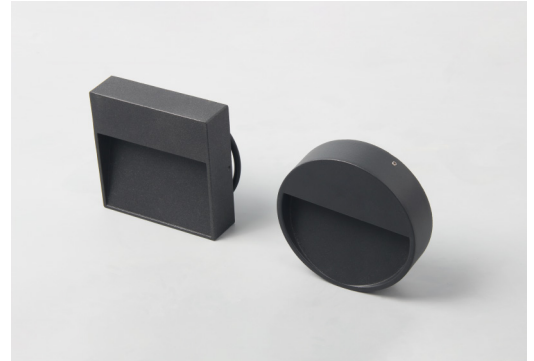

Item Code	P (W)	CCT (K)	Beam angle	Output (lm)	lm/w	Dimensions in mm			kg
						A	B	C	
HL-5179F/S	3	3000	45°	50	16.6	116	32	116	0.43
HL-5179F/L	6	3000	45°	390	65	200	32	200	0.96
HL-5179Y/S	3	3000	45°	50	16.6	Φ118	32	-	0.35
HL-5179Y/L	6	3000	45°	390	65	Φ200	32	-	0.94

### Dimensions in mm

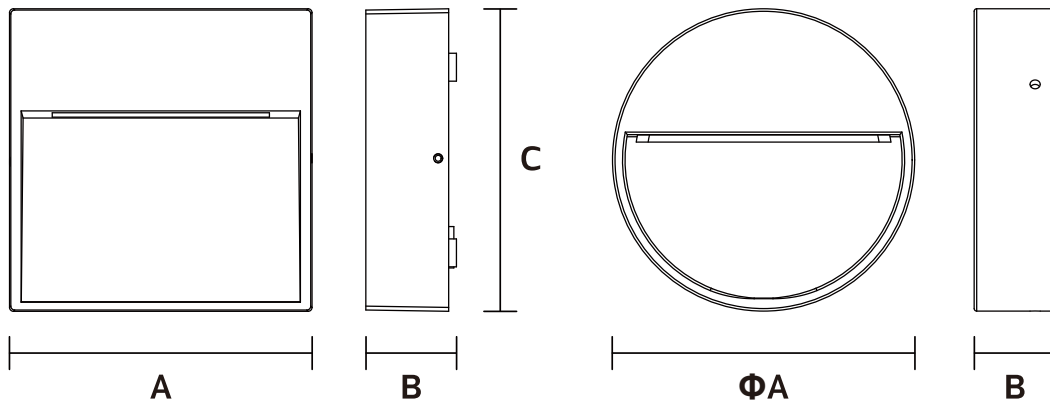


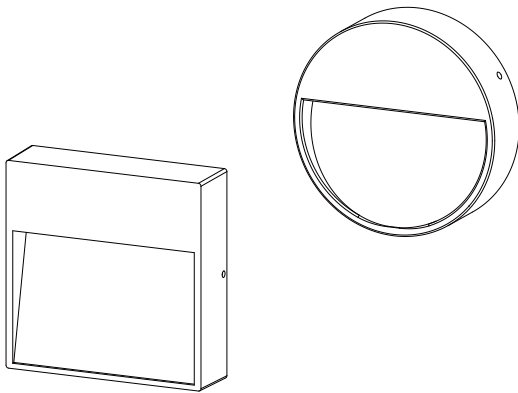


**Description:**  
LED Outdoor Wall Lamp


**Main material:**  
Aluminum+Glass

**Specification**  
The lamp is made of high-quality materials and advanced manufacturing processes, with excellent waterproof, moisture-proof, and dust-proof performance, making it safe to use in rainy, snowy, and humid environments. At the same time, the product adopts exquisite appearance design and can choose from a variety of styles and lighting effects, making your outdoor space more full of vitality.


**Applications**  
. Bedroom  
. Living room  
. Stairs

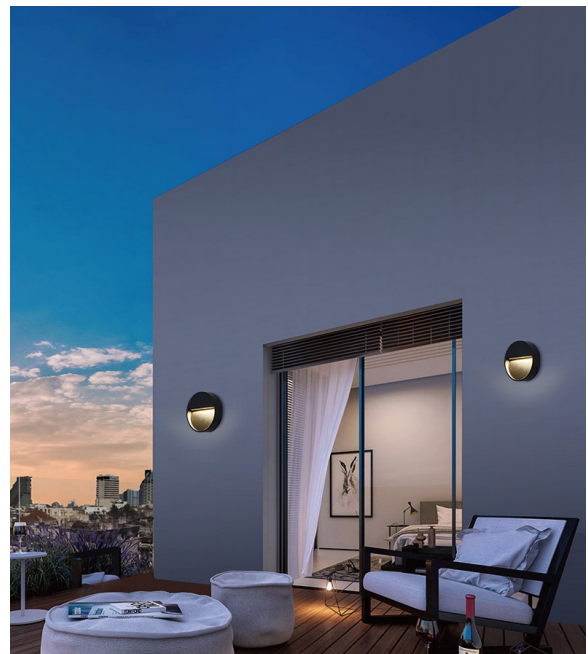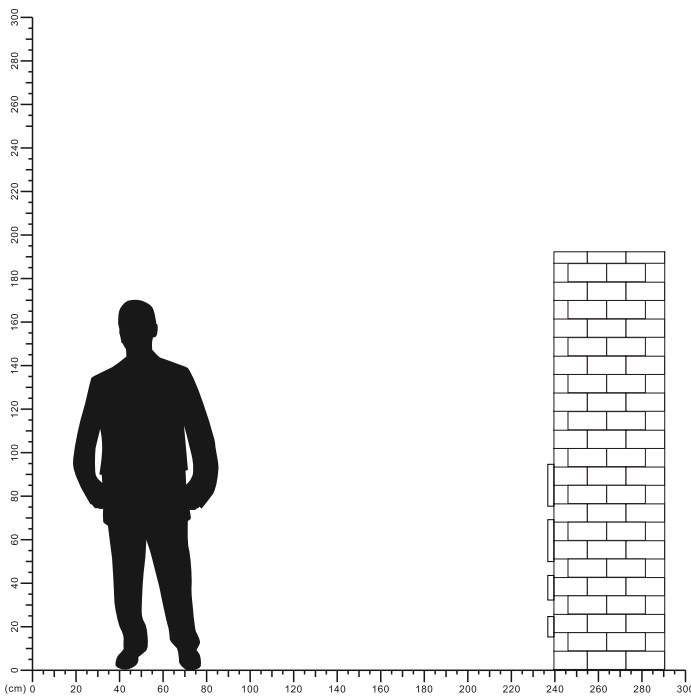

# LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

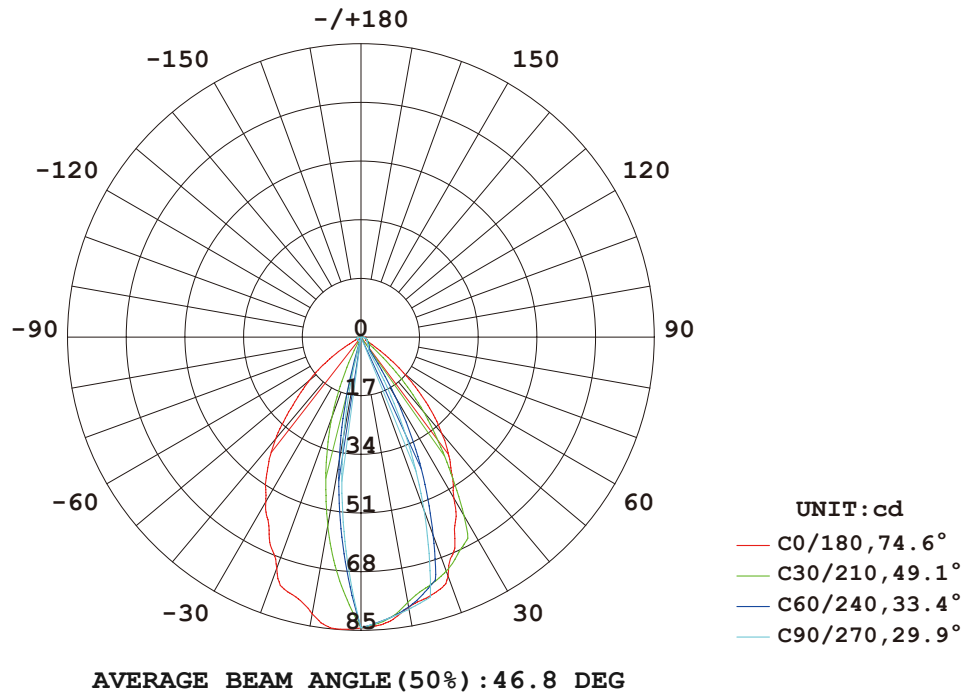


## Illuminance at a Distance

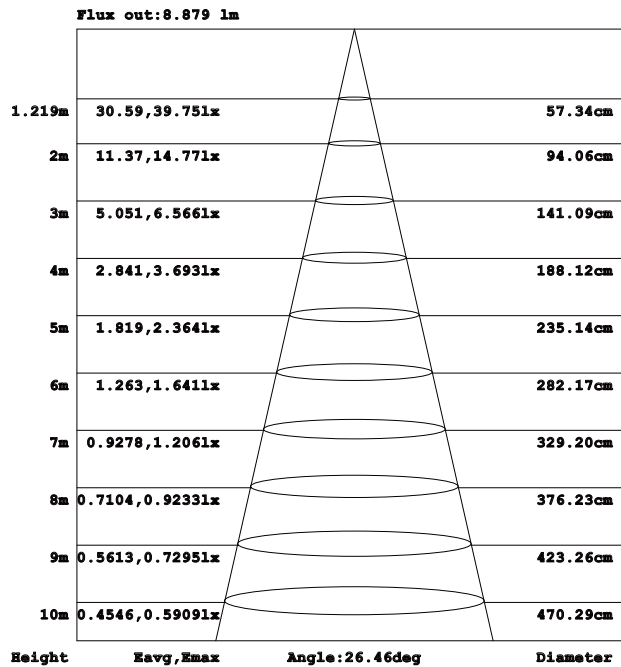


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

# LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

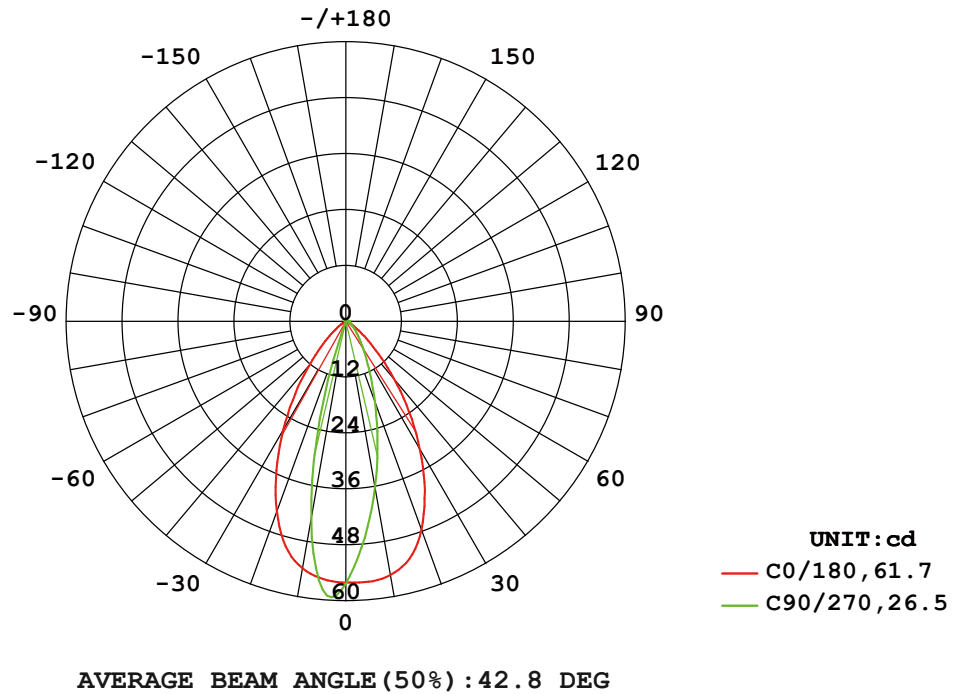


## Illuminance at a Distance

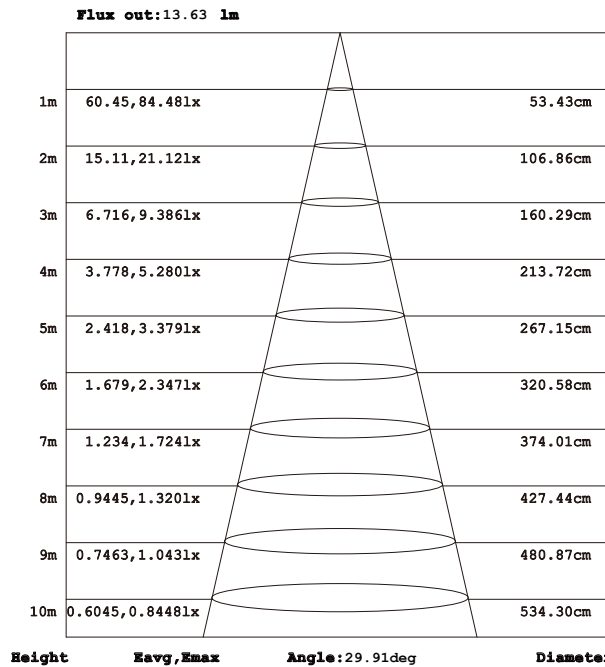

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


# LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

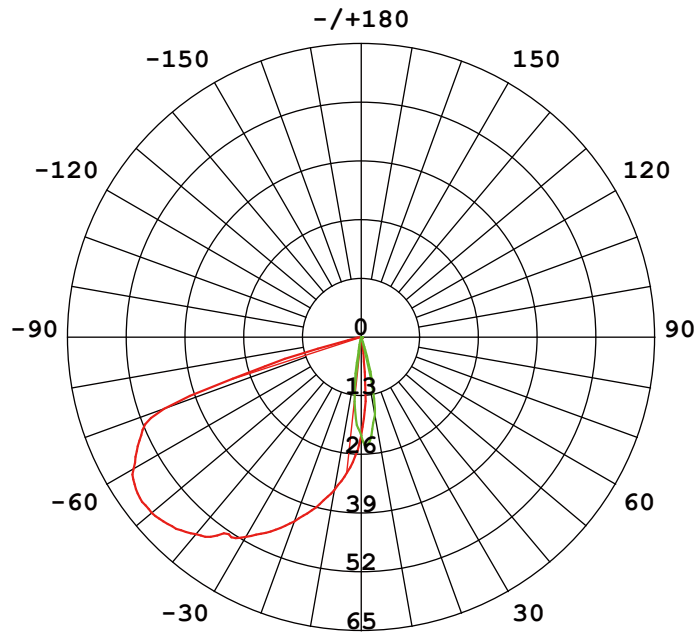

UNIT: cd  
 — C0/180, 65.7  
 — C90/270, 19.9


AVERAGE BEAM ANGLE (50%) : 42.6 DEG

## Illuminance at a Distance

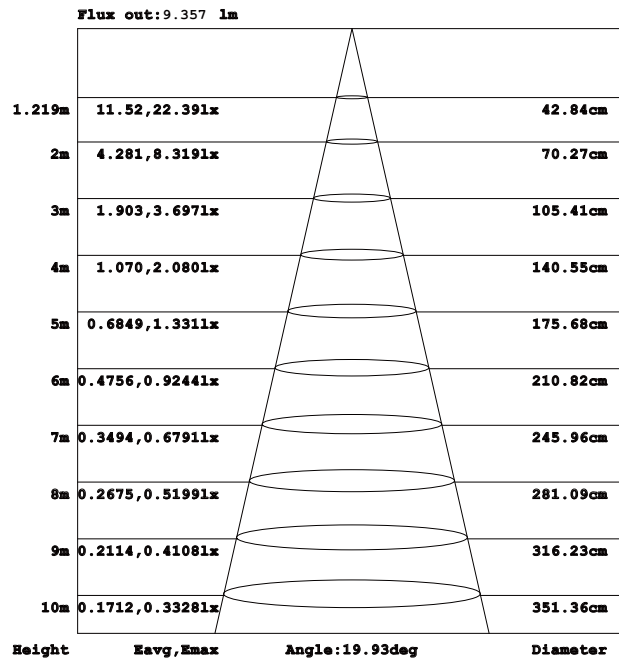


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

# LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

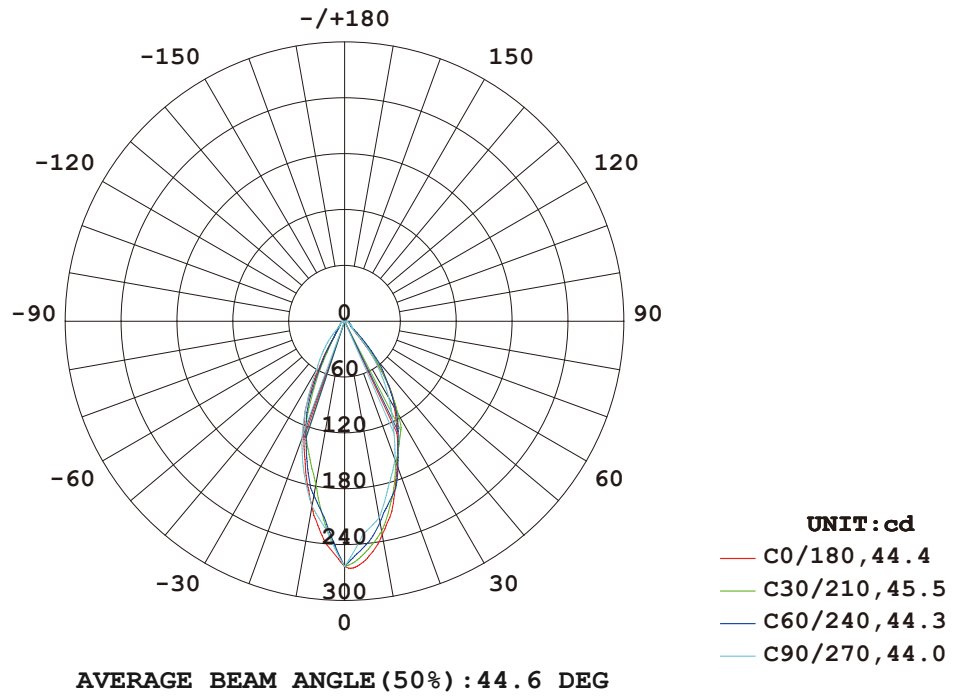

## Illuminance at a Distance

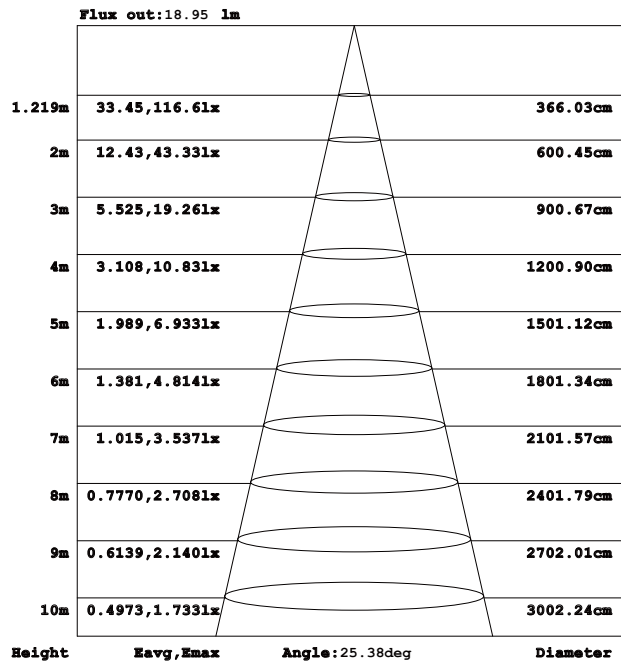

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

