




## LED Outdoor Wall Lamp


HL-6026 Series  
IP65



| Item Code | P (W) | CCT(K) | Beam angle | Output (lm) | lm/w | Dimensions in mm |    |     | kg    |
|-----------|-------|--------|------------|-------------|------|------------------|----|-----|-------|
|           |       |        |            |             |      | A                | B  | C   |       |
| HL-6026/6 | 6     | 3000   | 200°       | 390         | 65   | 40               | 80 | 166 | 0.344 |
| HL-6026/8 | 8     | 3000   | 300°       | 520         | 65   | 46               | 80 | 219 | 0.42  |

### Dimensions in mm

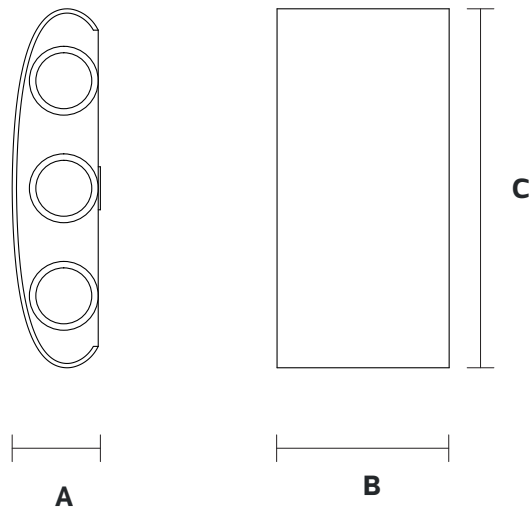

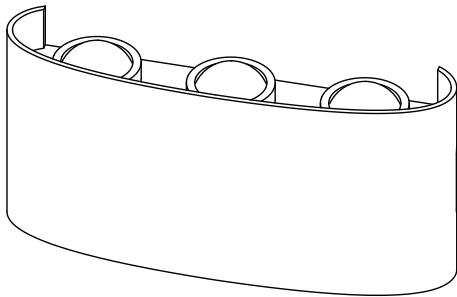


**Description:**  
LED Outdoor Wall Lamp


**Main material:**  
Aluminum+Engineering plastics

**Specification**  
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps  
High quality light, high color rendering, less heat, no UV or IR radiation  
Build-in LED Driver  
IP65


**Applications**  
. Park  
. Square  
. Tourist attraction  
. Corridor

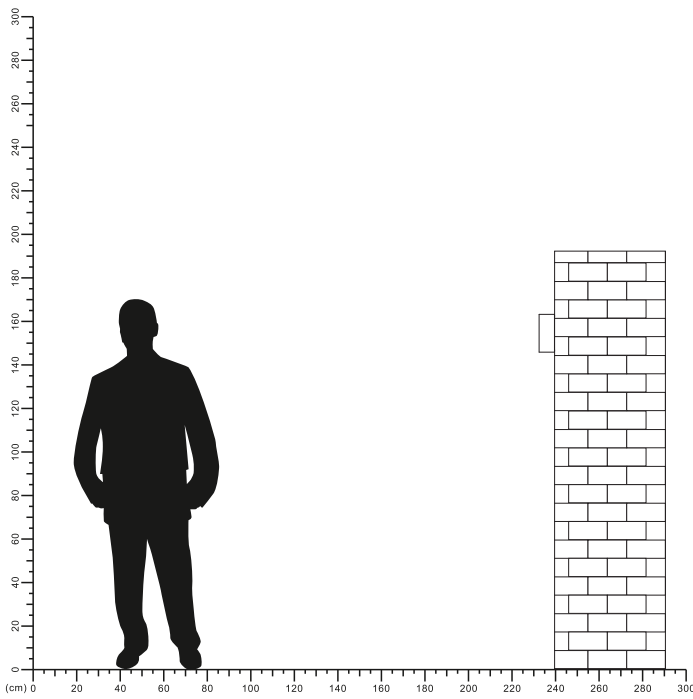

# LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

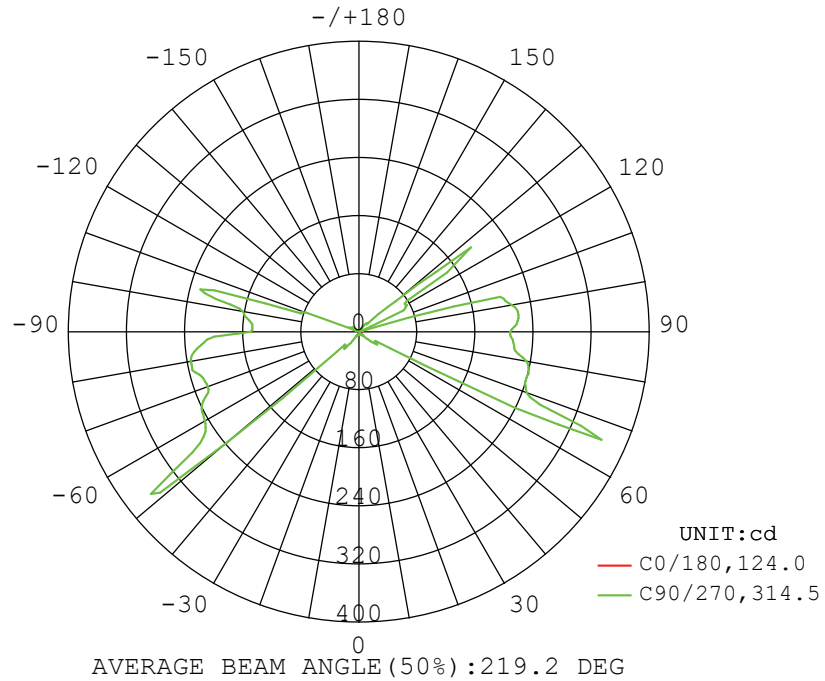


## Illuminance at a Distance

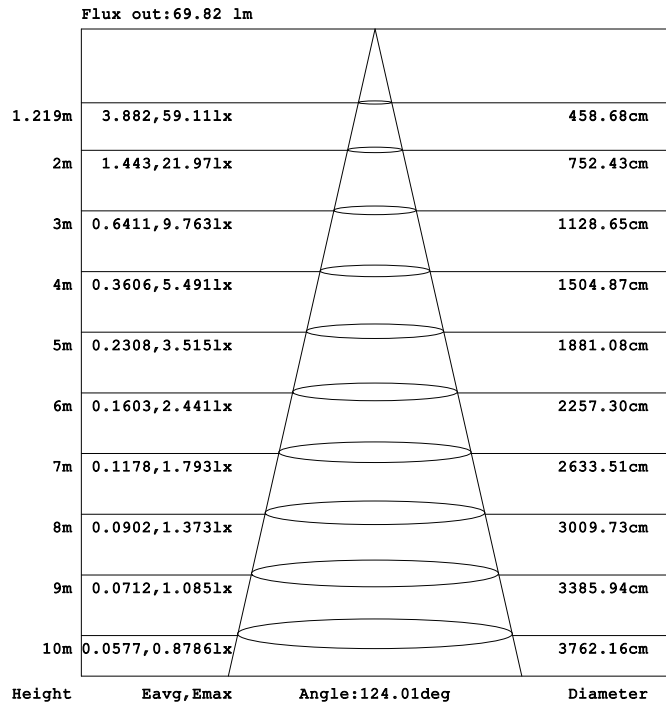


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.







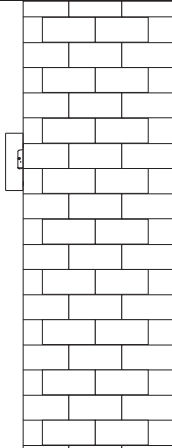
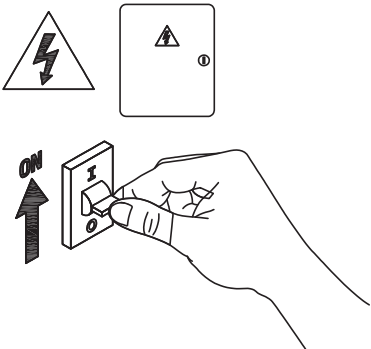
# LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

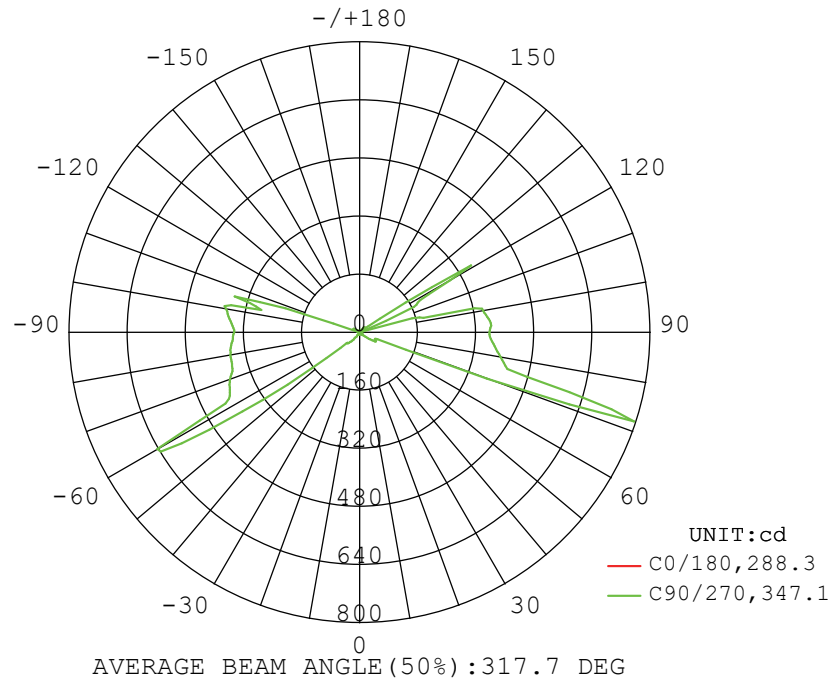

## Illuminance at a Distance

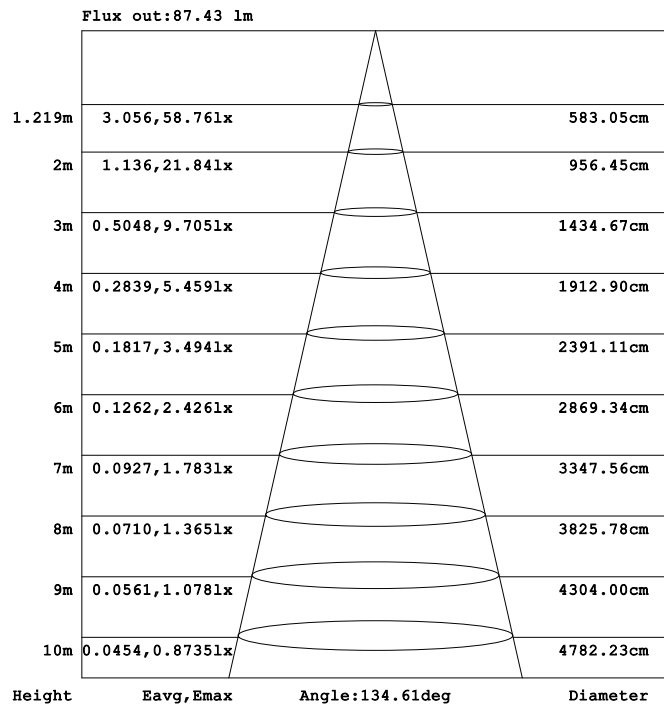

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.
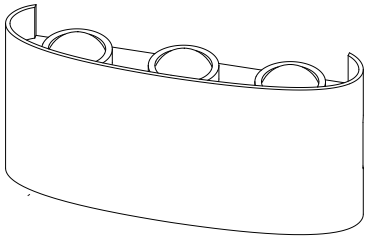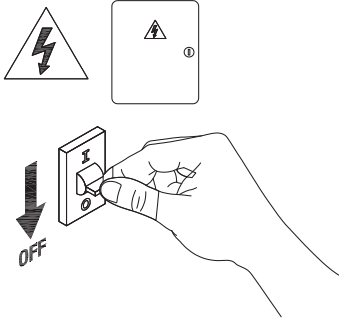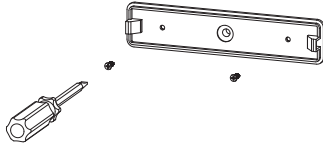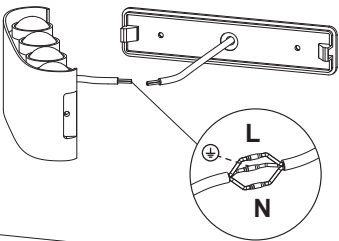
|   |   |
|---|---|
|  <p><b>1</b></p>                             |  <p><b>2</b> Turn off the power</p> |
|  <p><b>3</b> Drill two hole on your wall</p> |  <p><b>4</b> Fix the screw</p>      |
|  <p><b>5</b> Connect the cable</p>         |  <p><b>6</b> Fix the screw</p>   |
|  <p><b>7</b> Installation completed</p>    |  <p><b>8</b> Turn on power</p>    |

