



Smart Wi-Fi +BLE Sensor Wall Switch (EU)

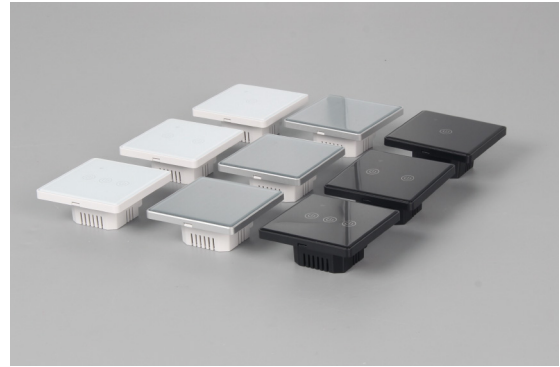


Model No	Type of switch	Wireless standard	Humidity	Rated voltage	Max.Load	Rated voltage	Max.Load	Color
HU1210A007	1Gang	IEEE802.11 b/g/n	≤80%	N+L AC 100-240V/50Hz	N +L 600W/Gang	L AC 220-240V/50Hz	L 5-200W/Gang	Black
HU1210A005	1Gang	IEEE802.11 b/g/n	≤80%	N+L AC 100-240V/50Hz	N +L 600W/Gang	L AC 220-240V/50Hz	L 5-200W/Gang	White
HU1210A002	1Gang	IEEE802.11 b/g/n	≤80%	N+L AC 100-240V/50Hz	N +L 600W/Gang	L AC 220-240V/50Hz	L 5-200W/Gang	Sliver
HU1211A007	2Gang	IEEE802.11 b/g/n	≤80%	N+L AC 100-240V/50Hz	N +L 600W/Gang	L AC 220-240V/50Hz	L 5-200W/Gang	Black
HU1211A005	2Gang	IEEE802.11 b/g/n	≤80%	N+L AC 100-240V/50Hz	N +L 600W/Gang	L AC 220-240V/50Hz	L 5-200W/Gang	White
HU1211A002	2Gang	IEEE802.11 b/g/n	≤80%	N+L AC 100-240V/50Hz	N +L 600W/Gang	L AC 220-240V/50Hz	L 5-200W/Gang	Sliver
HU1212A007	3Gang	IEEE802.11 b/g/n	≤80%	N+L AC 100-240V/50Hz	N +L 600W/Gang	L AC 220-240V/50Hz	L 5-200W/Gang	Black
HU1212A005	3Gang	IEEE802.11 b/g/n	≤80%	N+L AC 100-240V/50Hz	N +L 600W/Gang	L AC 220-240V/50Hz	L 5-200W/Gang	White
HU1212A002	3Gang	IEEE802.11 b/g/n	≤80%	N+L AC 100-240V/50Hz	N +L 600W/Gang	L AC 220-240V/50Hz	L 5-200W/Gang	Sliver


Dimensions in mm

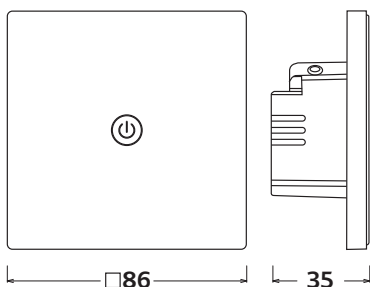

HU1210A007 HU1210A005 HU1210A002

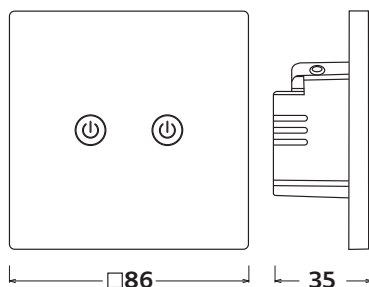

HU1211A007 HU1211A005 HU1211A002

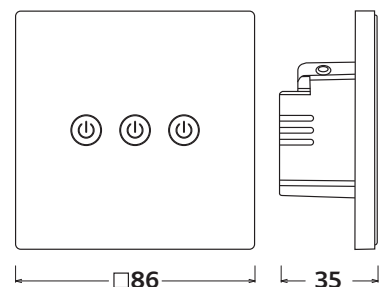

HU1212A007 HU1212A005 HU1212A002



Description:
Smart Wi-Fi + BLE Sensor Wall Switch (EU)

Main material:
Glass + PC

Specification:
No wall chiseling, pipe embedding, or wiring required.
Replaces traditional switches, allows flexible switch placement, and works wirelessly with a paired controller.

Applications
.Office
.Meeting room
.Sitting room

