

## LED Strip Light Dimmer Controller


NRP-ST24-DIM  
IP20



<b>Indoor</b> 	<b>DC</b> 12-24V	<b>PWM</b> 256	Dynamic Speed Level 10	Lighting Brightness Level 10	ta 40°C	<b>IP20</b>	Remote Control Mode RF	Remote Frequency 433.92MHz	Remote Distance ≤30M
-------------------	---------------------	-------------------	---------------------------	---------------------------------	------------	-------------	---------------------------	-------------------------------	-------------------------

Item Code	Working Voltage(DC)	Output Current (A)	Dynamic Mode	Dimensions in mm			kg
				A	B	C	
NRP-ST24-DIM	12-24V	6A	8 Mode	86	40	7	0.05


### Dimensions in mm

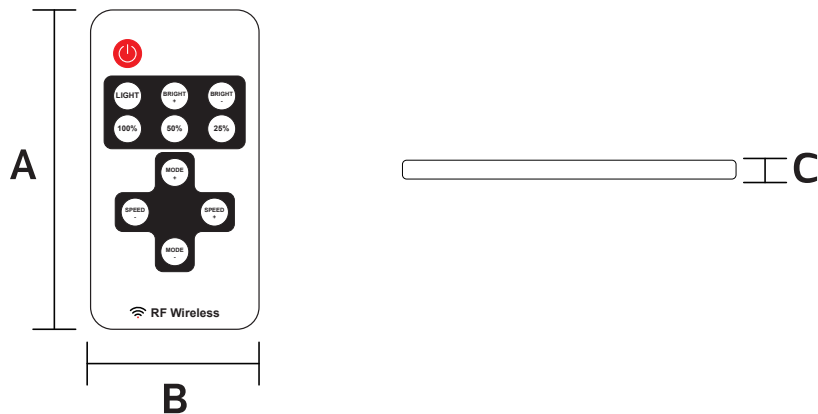



**Peak Output Current: 12A**

**Remote Control Mode: RF Wireless**  
**Remote Frequency: 433.92MHz**  
**Remote Distance: ≤30M (at open area)**

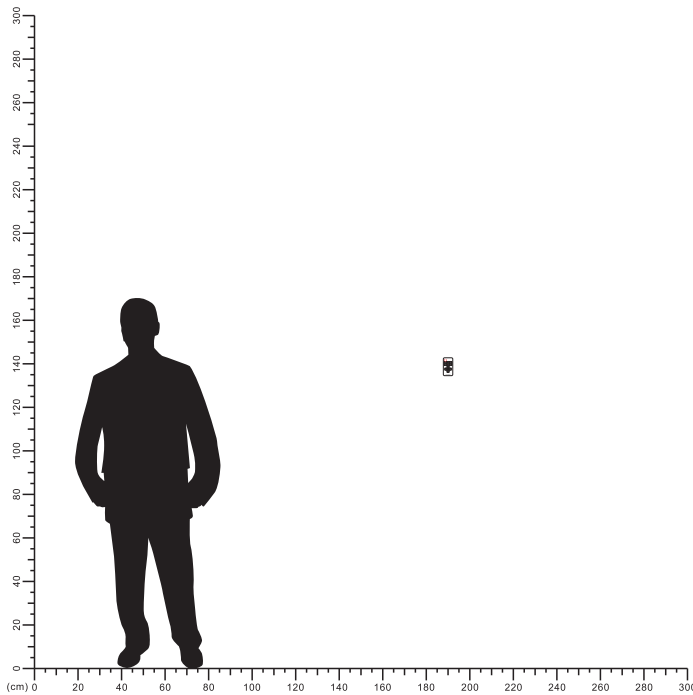

**1. Turn On / Standby**

Press this Key to turn on unit or switch to standby mode . Unit will turn on and restore to previous status at powering on moment .

**2. Lighting mode**

Switch to lighting mode from dynamic mode .

**3/8/9. Dimmer Adjust Shortcuts**

Switch to 100%,50%, or 25% brightness lighting mode .

**4/6. Dynamic Mode Adjust**

Switch to dynamic mode from lighting mode , or switch between different dynamic modes .

**5/7. Speed Adjust Adjust**

playing speed of dynamic modes . Press SPEED + to increase speed and press SPEED - to decrease .

**10/11. Brightness Adjust ( Dimmer )**

Adjust lighting mode brightnes . Press BRIGHT + to increase brightness and press BRIGHT - to decrease .

