


LED Smart Magnetic Track System




Model No:	P(W)	Using Track	Total Lumen	Beam Angle	Color	CCT(K)	
HU-STL0301-6	6	NR-S20/F20 NR-S35/F35	414	36°	Black	2700-6000	0.15
HU-STL1551-10	10	NR-S20/F20 NR-S35/F35	680	36°	Black	2700-6000	0.25
HU-STL0301-15	15	NR-S20/F20 NR-S35/F35	1110	36°	Black	2700-6000	0.35


Dimensions in mm




HU-STL0301-6

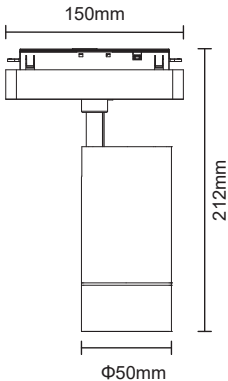

HU-STL1551-10

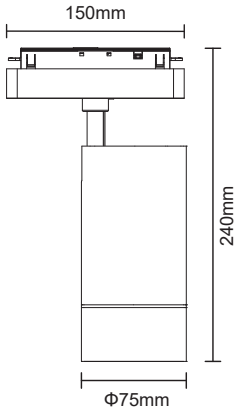

HU-STL0301-15


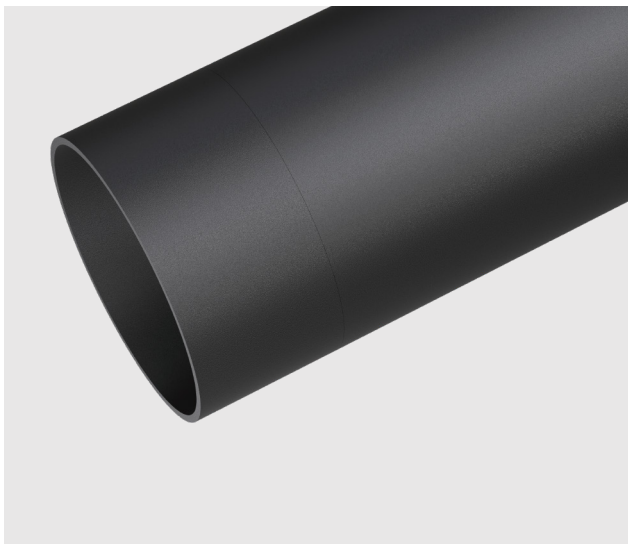


Description:
LED Smart Magnetic Track System


Main material:
Aluminum+Pc

Specification:
The aluminum alloy lamp body is integrally extruded and formed, with a spraying process, fine workmanship, and is waterproof and dustproof. The lampshade is made of high-transparency PC material, which is bright but not dazzling, anti-aging, and has a long service life.
IP20


Applications
.Office
.Meeting room
.Sitting room

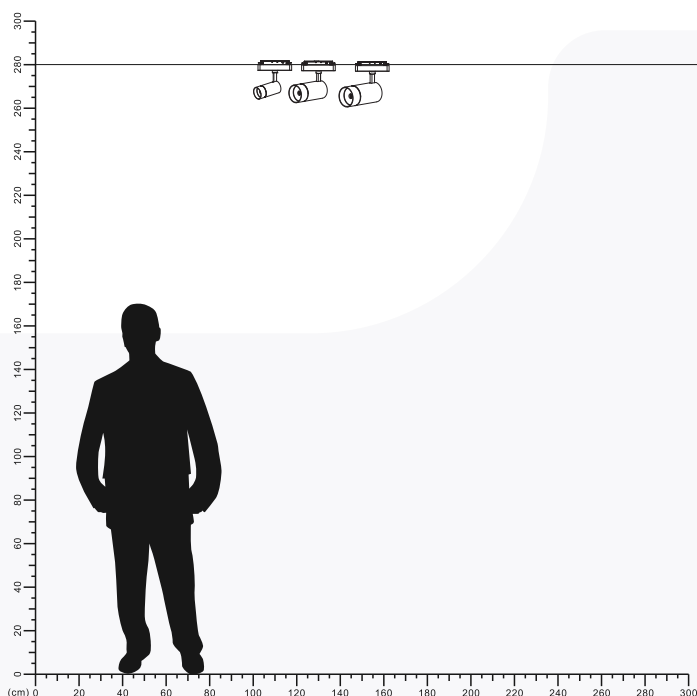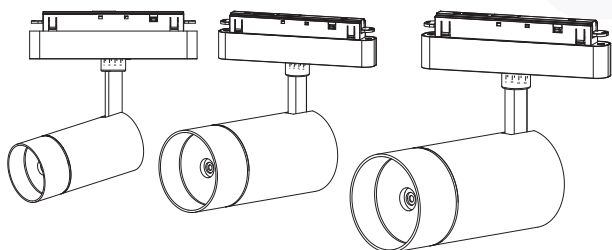


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

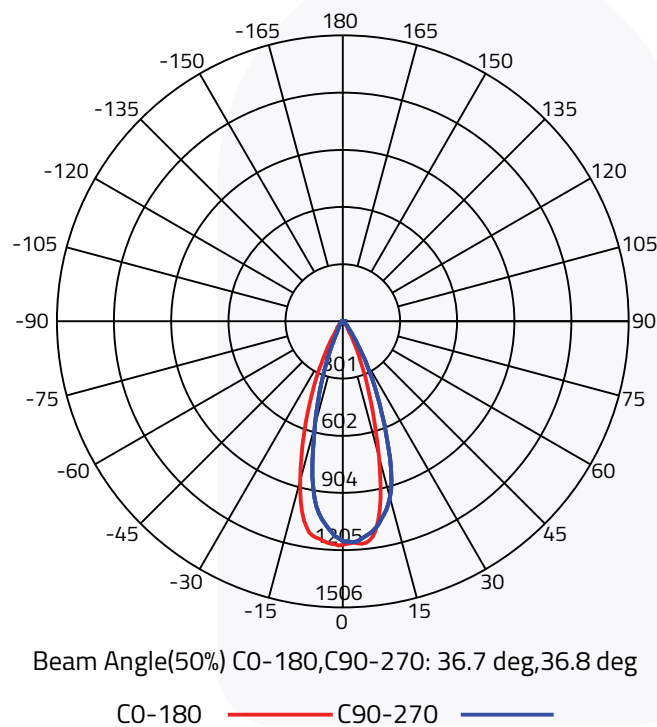


Illuminance at a Distance

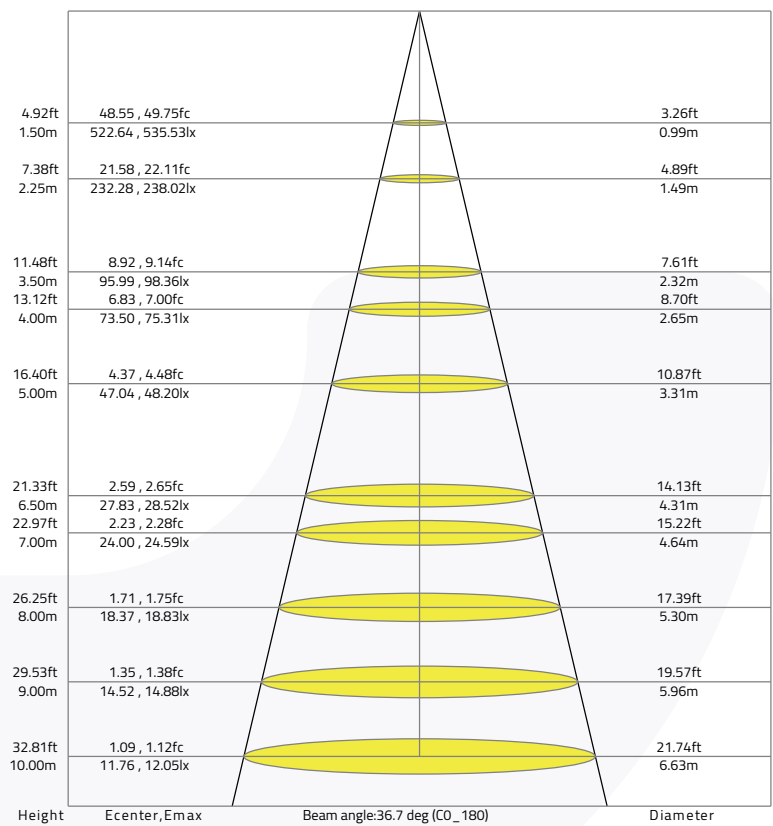


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

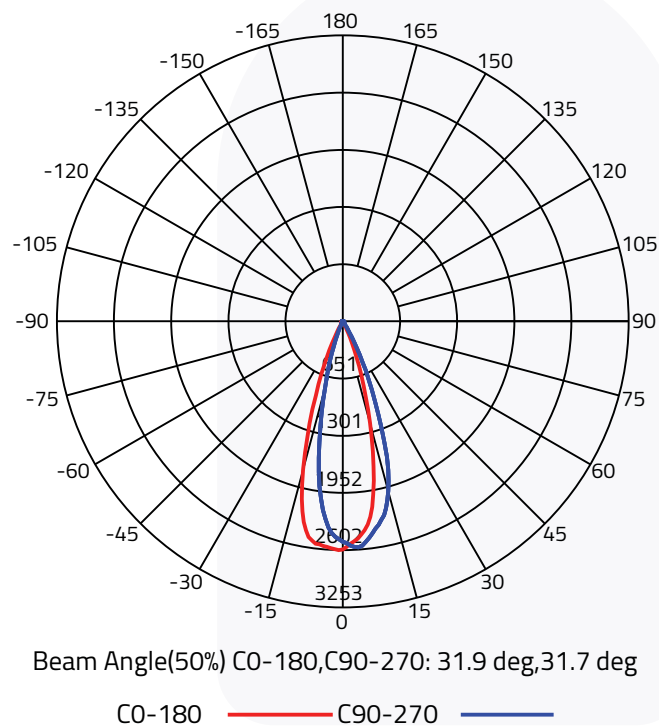


Illuminance at a Distance

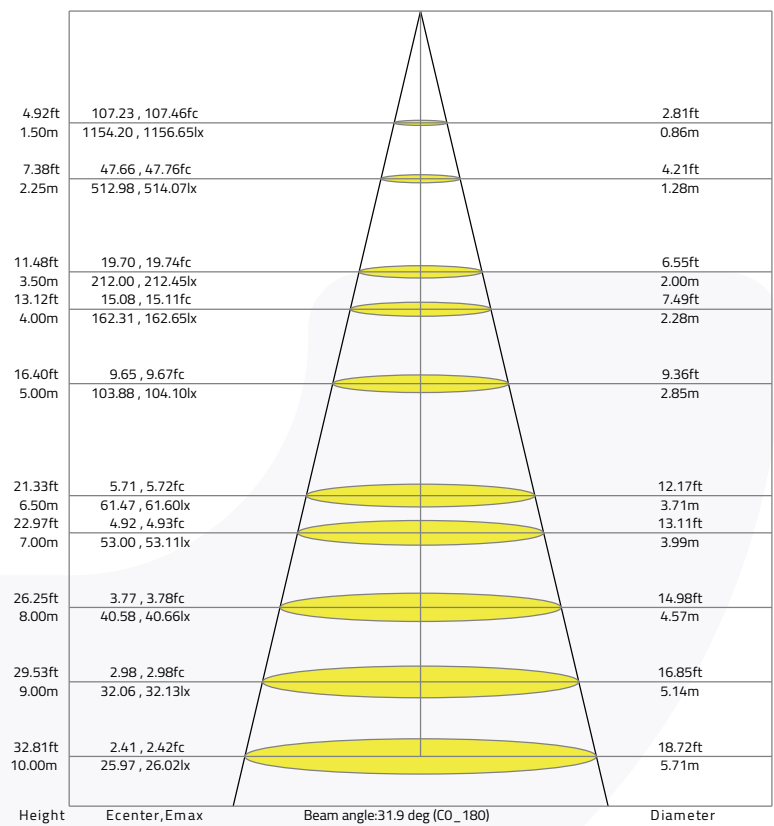


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

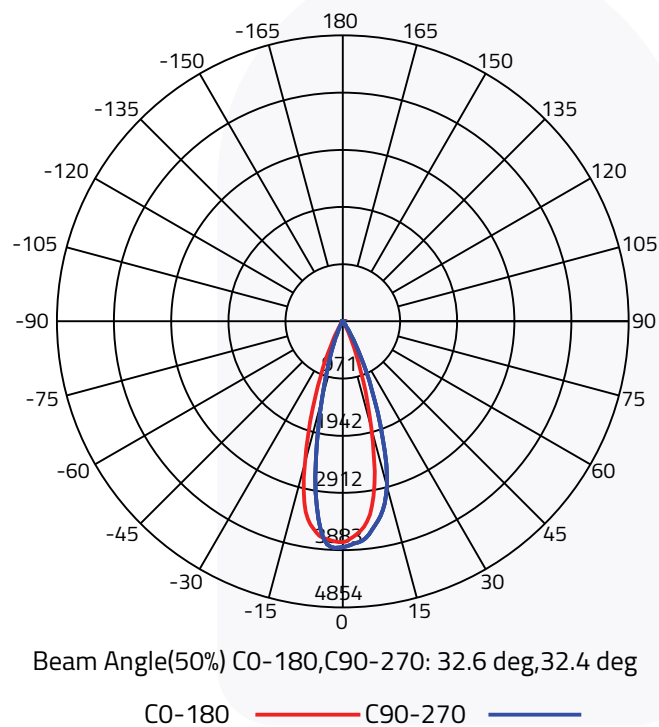


Illuminance at a Distance

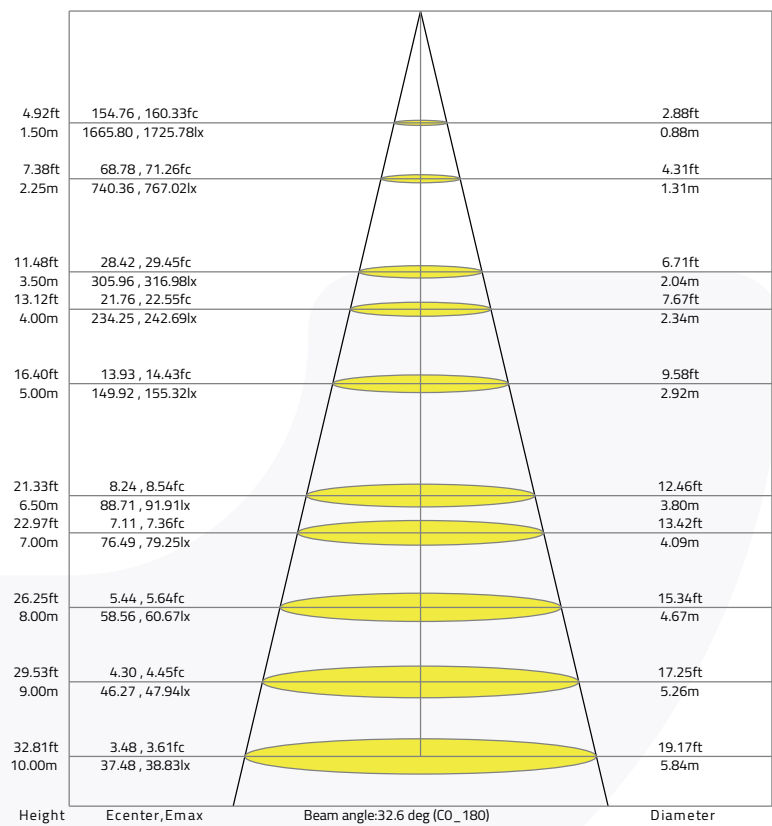

Installation drawing




1

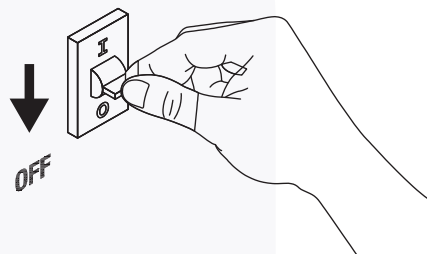


2

Turn off the power

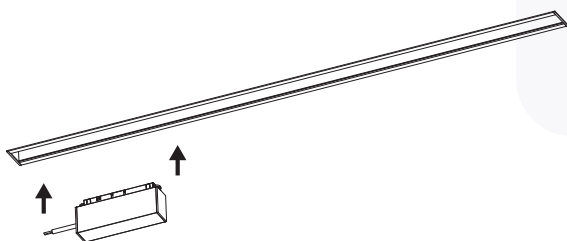


3

Install DC48V power supply

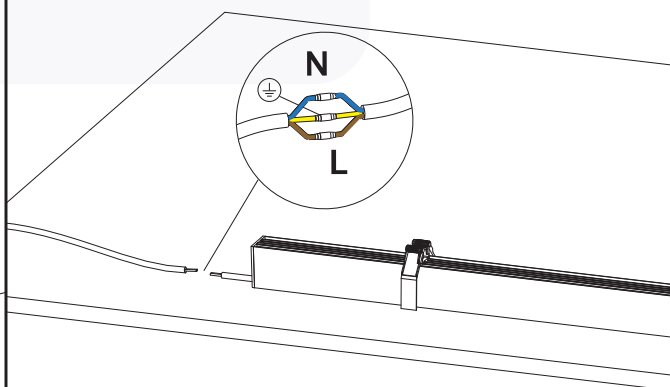


4

Connect the cable

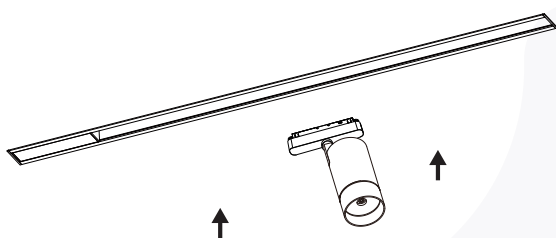

5

Install lamp

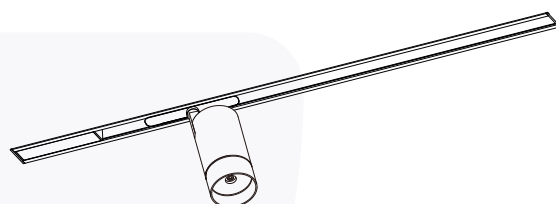

6

Installation is complete