



SOLAR LED OUTDOOR WALL LIGHT


SWL-24



IP54



Item Code	Watt	Solar Panel	Battery Capacity	Charging/ Discharging Temp:	Charging Time	CCT	kg
SWL-24	9.6W	Mono-Crystalline 1.5W	3.7V/7.4Wh	0~45°C/-20~60°C	7h	3000K,Ra≥80	0.3
Lumen	Lighting Time in Rainyday	Control Mode	Lighting Mode		PIR	IP/IK Rated	
104.16lm/W	≥10 days	Long Press 1.5s On/Off	M1:25% till dawn M2:10% + PIR (30s) M3:0 + PIR (30s) M4:100% till dawn		Max 5m,120°	IP54	

Dimensions in mm

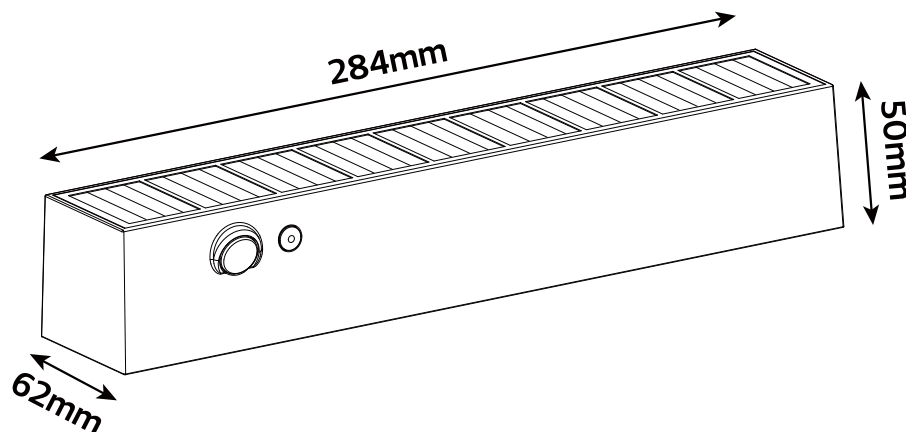

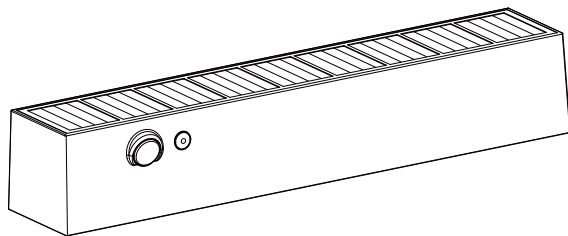
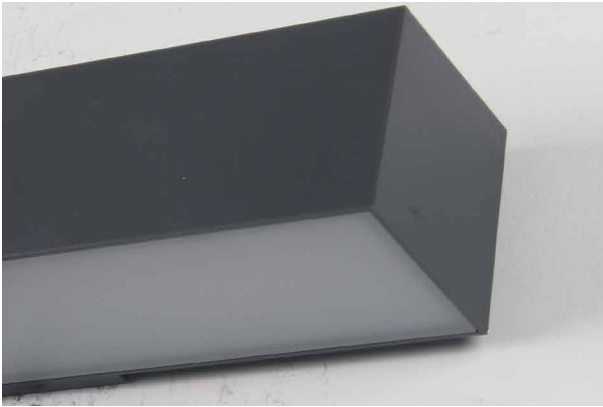



Description:
SOLAR LED OUTDOOR WALL LIGHT

Main material:
PC

Specification
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps High quality light, high color rendering, less heat, no UV or IR radiation
LED driver is included
IP 54

Applications
. Park
. Square
. Garden

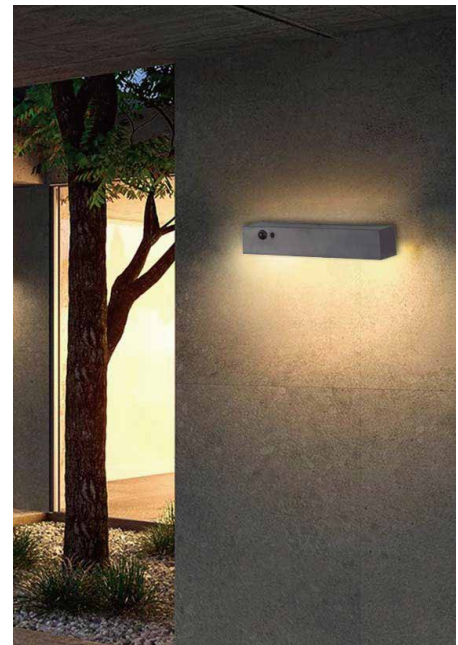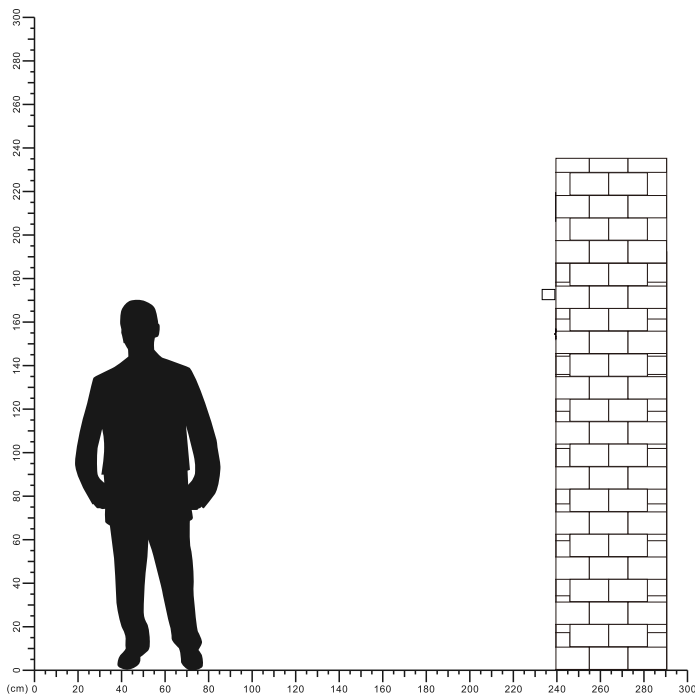

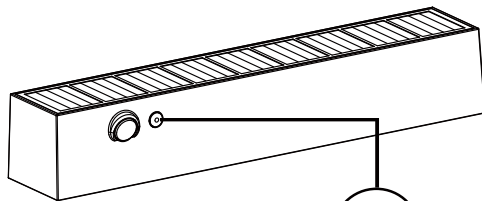

Switch Button


Switch Button

1. On/Off: Long press for 1.5s.
(After the initial activation, the lamp will turn on/off automatically when dark/dawn.)
2. Change lighting mode: Short press.

Lighting Mode


M1: 25% till dawn
M3: 0 + PIR (30s)

M2: 10% + PIR (30s)
M4: 100% till dawn

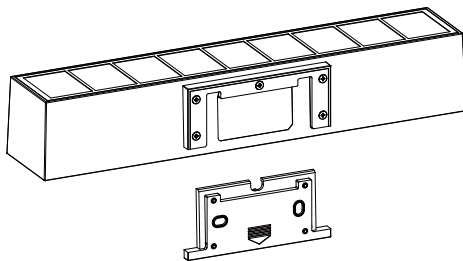


1

Take off the bracket from the lamp body




2

Drilling and embedding the expansion screws into the wall

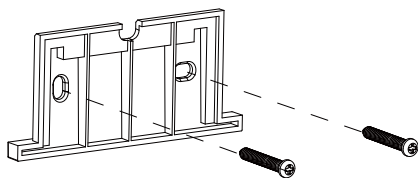

3

Fix the bracket by screws into the wall

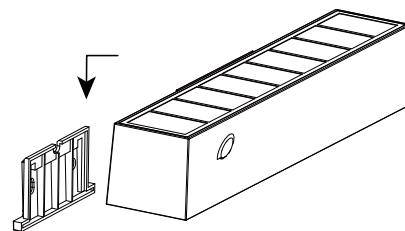

4

Hang the lamp body on the bracket

