



LED AR111



HV-AR111 -15 Series


IP20



Model No	P(W)	CCT(K)	Output (lm)	lm/w	Color	Dimensions in mm A B		kg
HV-IRDL0102-15-30K-WH-24D	15	3000	1200	80	White	Φ111	80	0.3
HV-AR111-15 DW	15	4000	1200	80	White	Φ111	80	0.3
HV-AR111-15 W	15	6500	1200	80	White	Φ111	80	0.3

Dimensions in mm

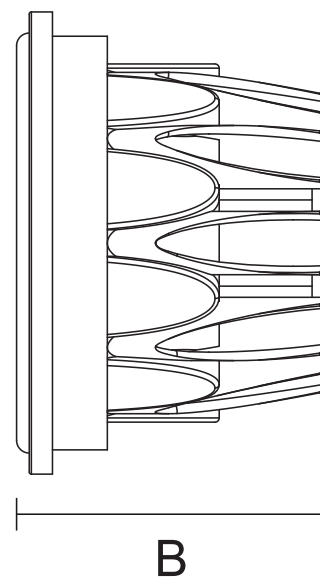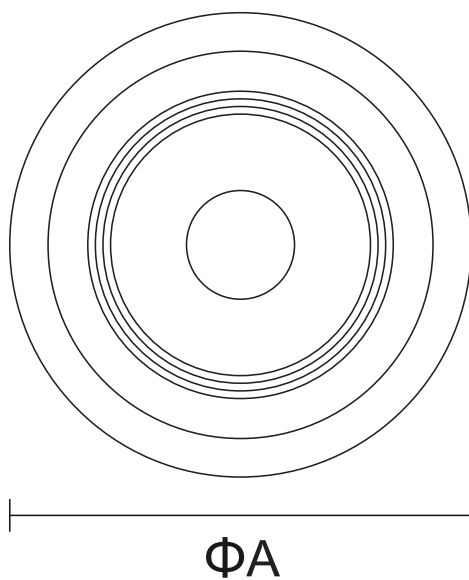

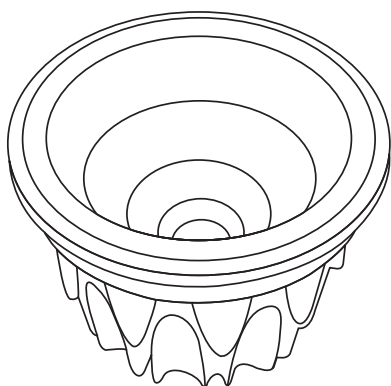

Description:

LED AR111

Main material:


Aluminum+Pc

Specification


Aluminum lamp body integrated die-casting molding, spraying process, fine work, sturdy and durable. High light transmission Pc material lamp shade, bright and not dazzling, anti-aging, long service life. IP20

Applications

- . Shoping mall
- . Office buildings
- . Exhibition hall

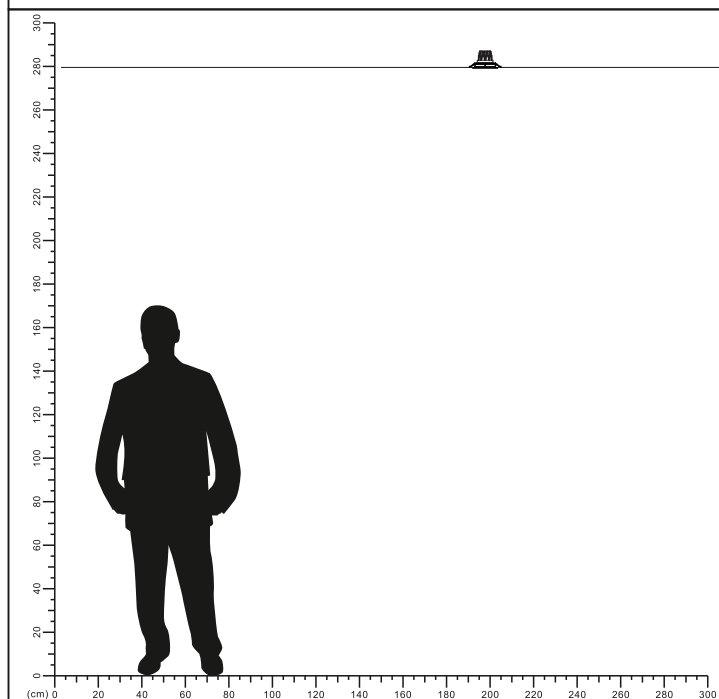



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

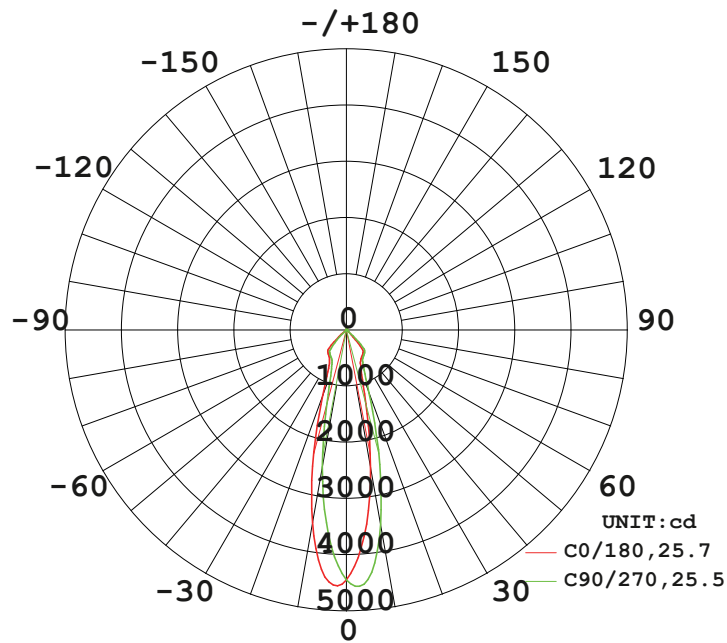


AVERAGE BEAM ANGLE (50%) : 25.6 DEG

Illuminance at a Distance

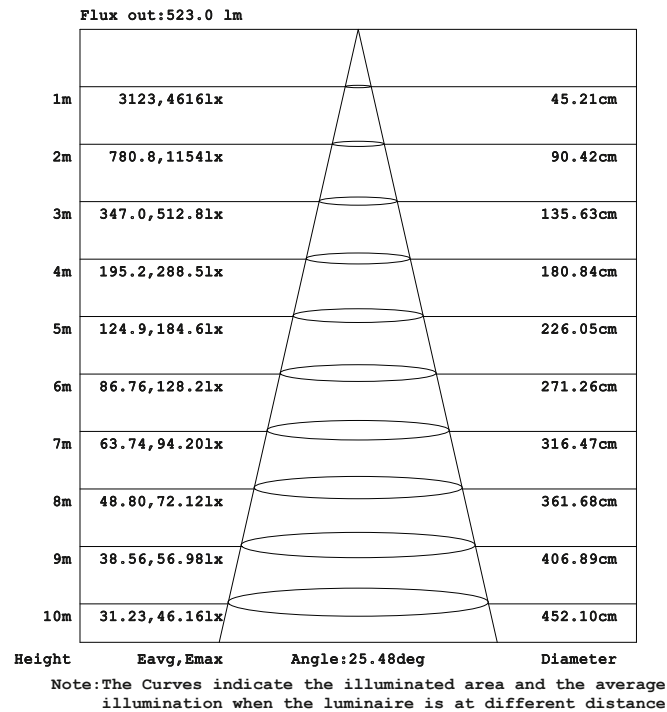


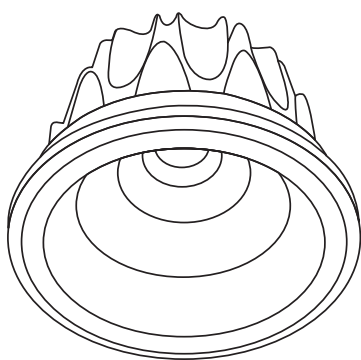

1

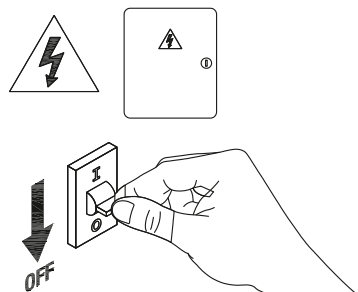


Turn off power




2


Cutting holes in and ceilings



Min. $2 \times 0.75 \text{mm}^2$
Max. $2 \times 1.00 \text{mm}^2$
 $\varnothing 6 - \varnothing 8 \text{mm}$




3




4

Snap the lamp cup into the face ring




5

Connect the cable

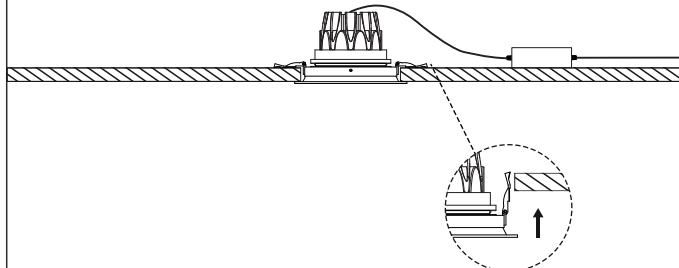

6

Buckle automatically fall down,
the installaion is complete

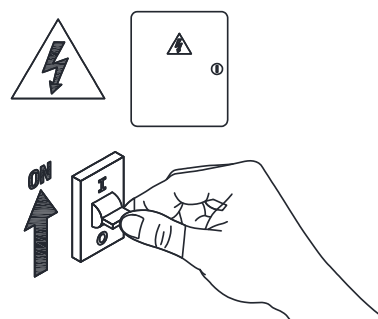

7

Turn on power

