





HV-PL102 Series

LED Panel Light



Item Code	P (W)	CCT(K)	Beam angle	Output (lm)	lm/w	Dimensions in mm A C		kg
HV-PL102-10	10	3000/6500	120°	1067	106.7	Φ125	45	0.14
HV-PL102-20	20	3000/6500	120°	2060	103	Φ175	45	0.24
HV-PL102-30	30	3000/6500	120°	3090	103	Φ230	45	0.35
HV-PL102-40	40	3000/6500	120°	4120	103	Φ305	45	0.58

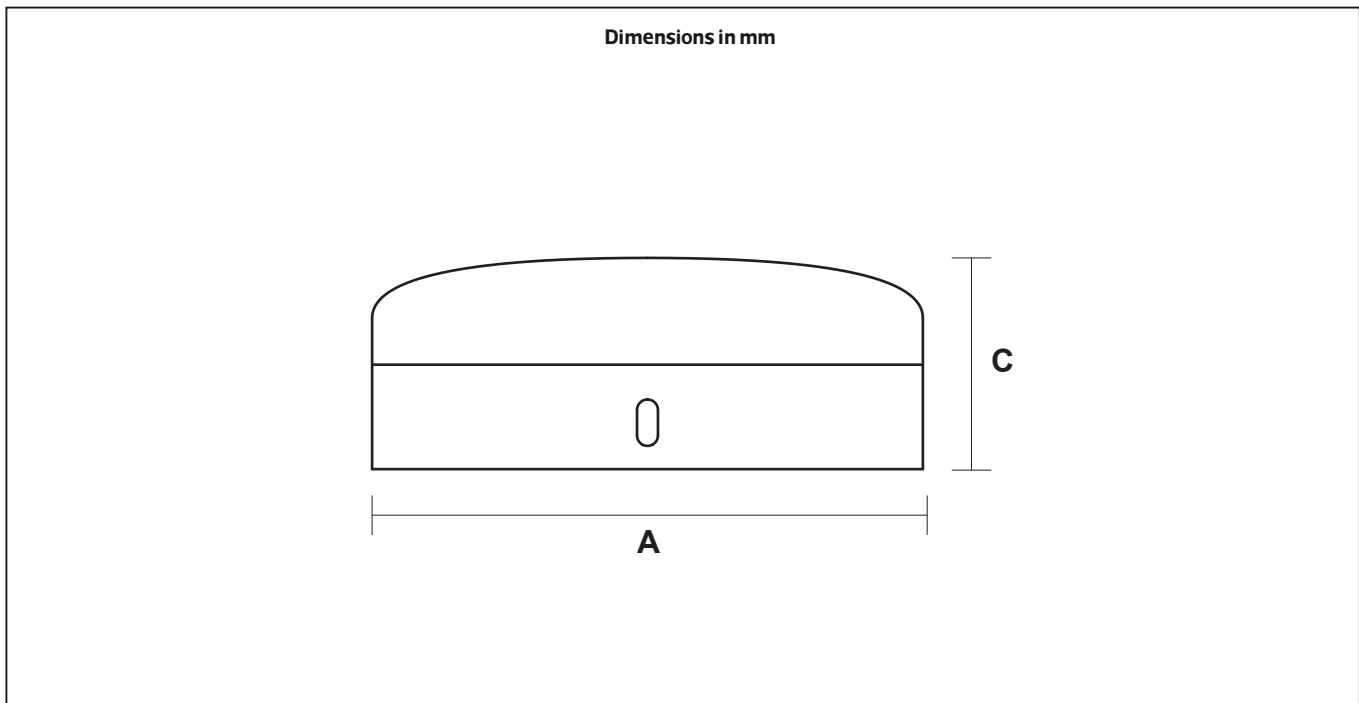

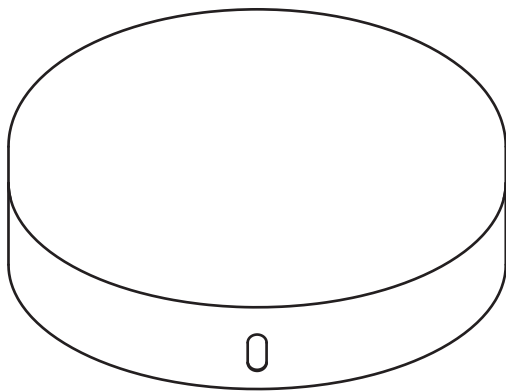
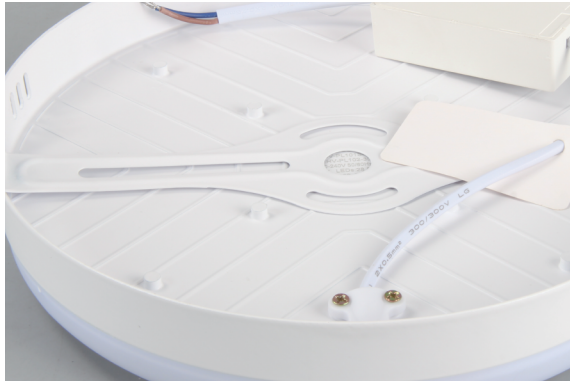


Description
LED Panel Light


Main material
Die-cast aluminum + PC plastics

Specification
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rendering, less heat, no UV or IR radiation LED driver is included
IP20

Applications
.Bedroom
.Sitting room
.Study room
.Corridor

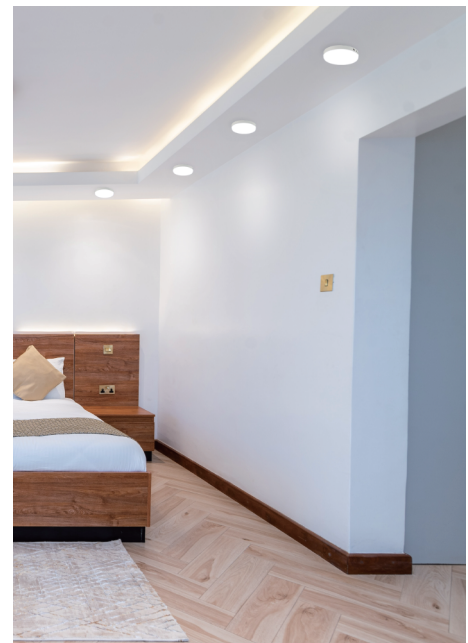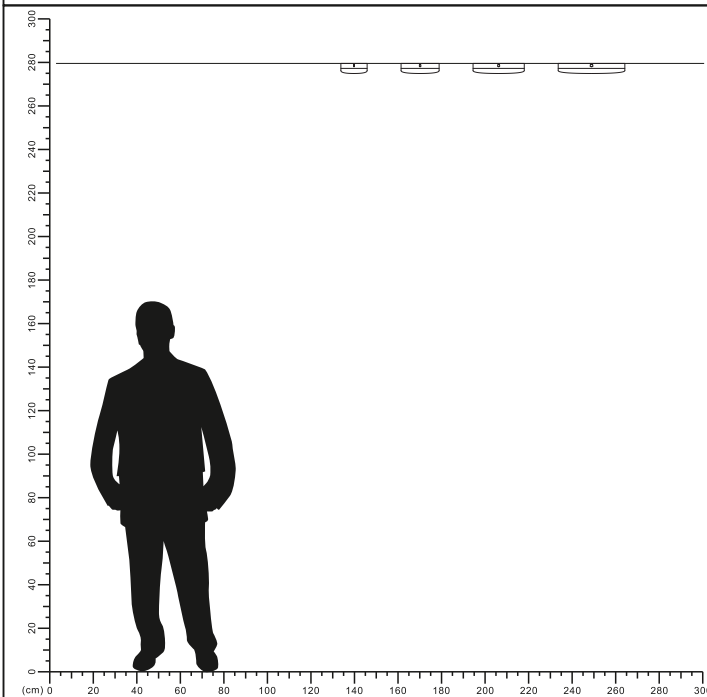


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

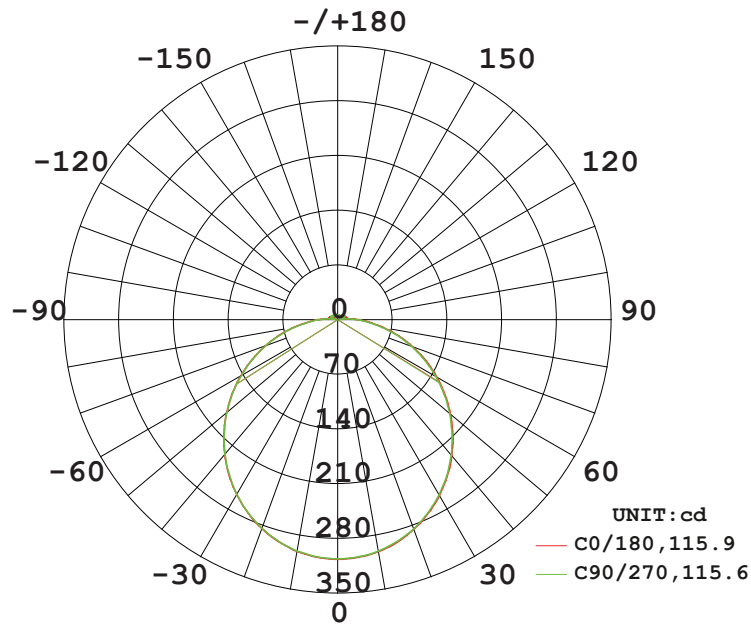

AVERAGE BEAM ANGLE (50%) : 115.8 DEG


Illuminance at a Distance

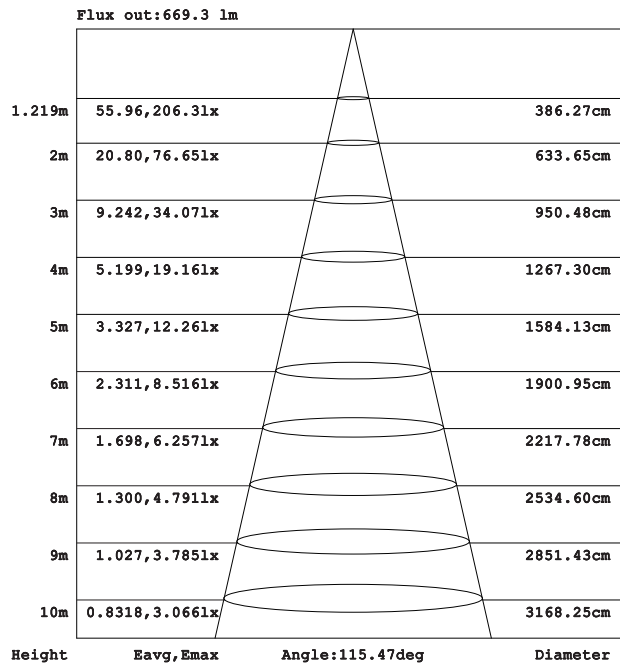

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


Model: HV-PL102-10

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

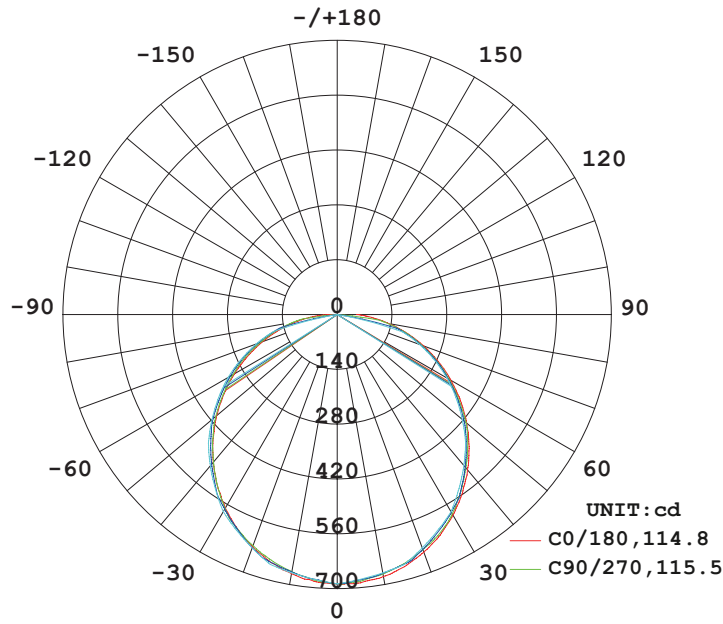


AVERAGE BEAM ANGLE (50%) : 115.1 DEG

Illuminance at a Distance

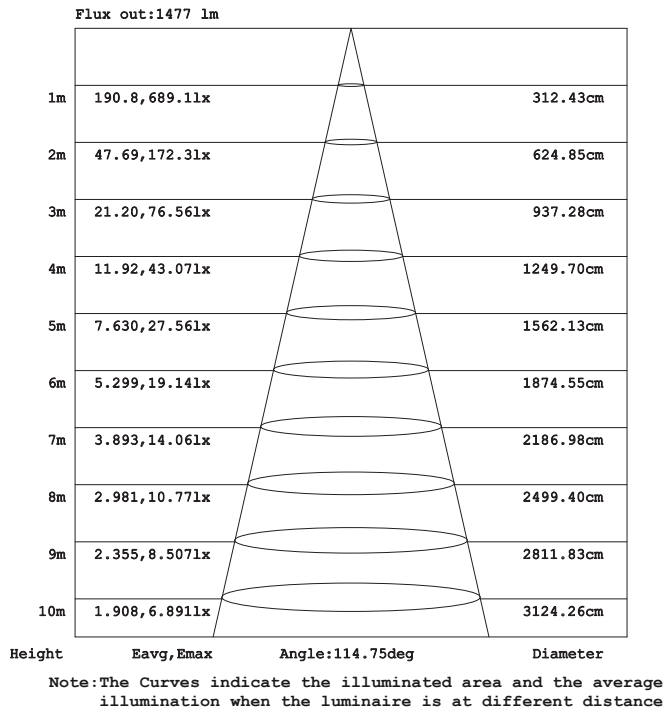


Model:HV-PL102-20

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

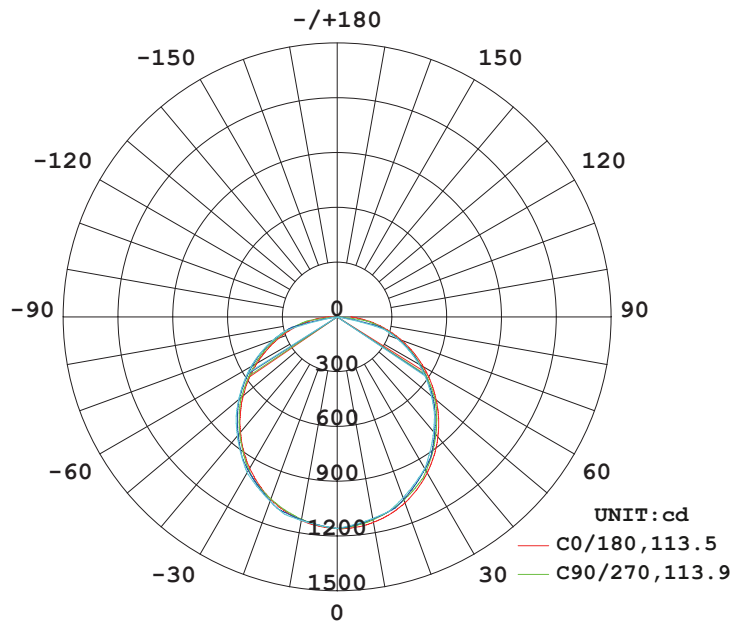


AVERAGE BEAM ANGLE (50%) : 113.6 DEG

Illuminance at a Distance

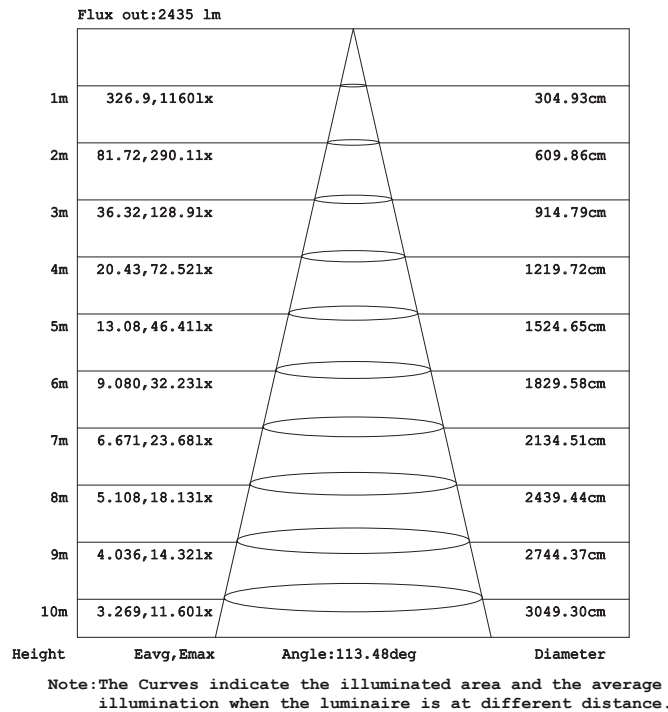


Model:HV-PL102-30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

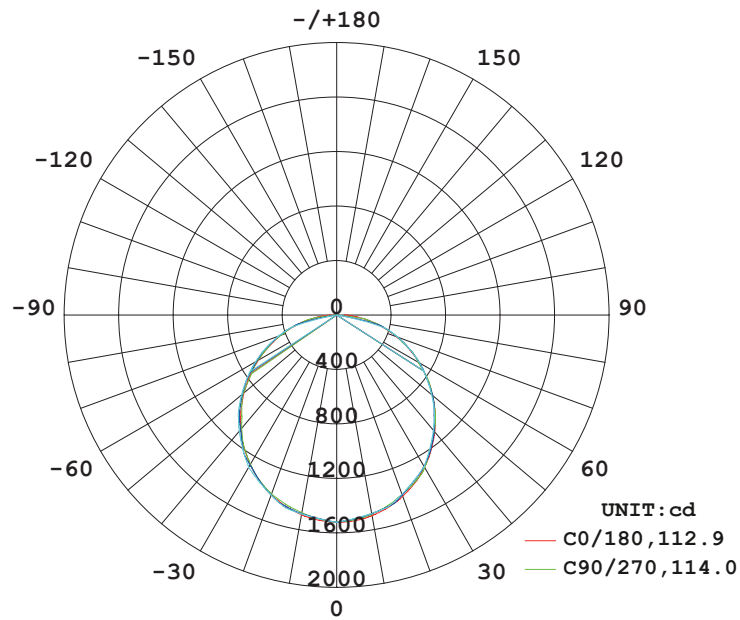

AVERAGE BEAM ANGLE (50%) : 113.3 DEG

Illuminance at a Distance

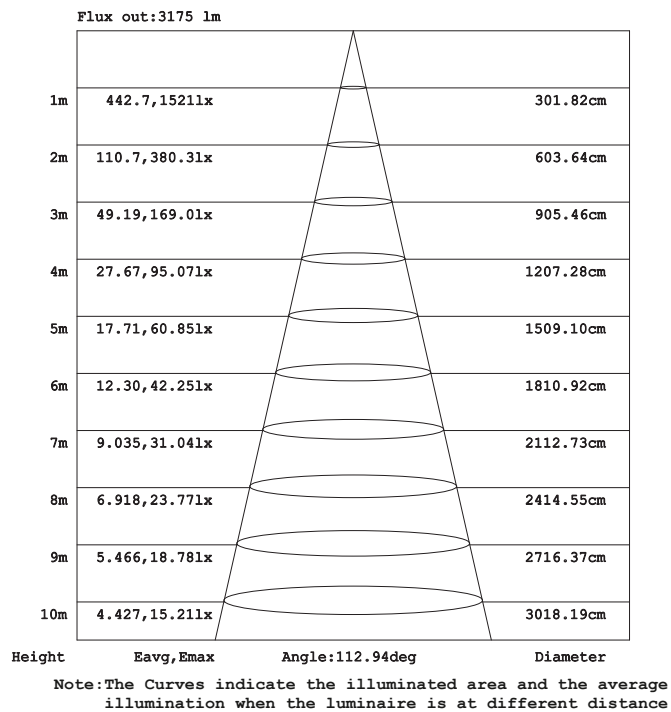

Model:HV-PL102-40

