



HV-PL106 Series


LED Panel Lamp

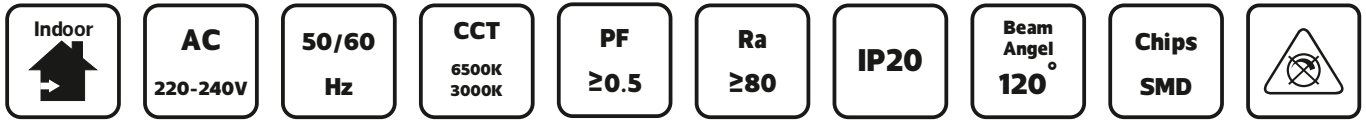

Item Code	P(W)	CCT(K)	Total Lumen	Beam Angle	Dimensions in mm		Hole Size (mm)	kg
					A	B		
HV-PL106-5	5	3000/6500	375	120°	90	25	Φ75	0.06
HV-PL106-12	12	3000/6500	900	120°	175	25	Φ150	0.16
HV-PL106-18	18	3000/6500	1854	120°	225	25	Φ200	0.58

Dimensions in mm

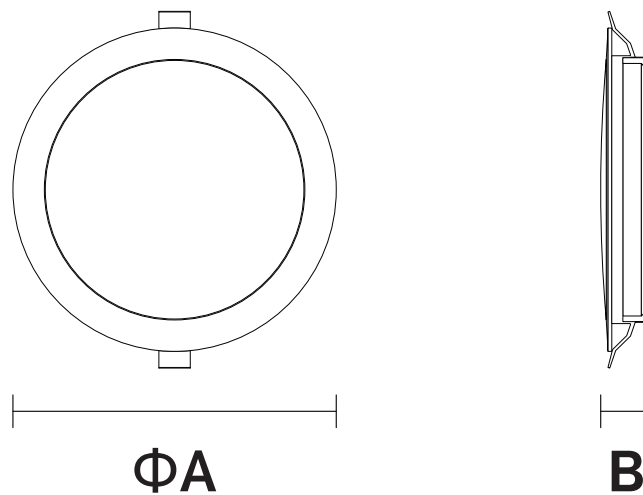

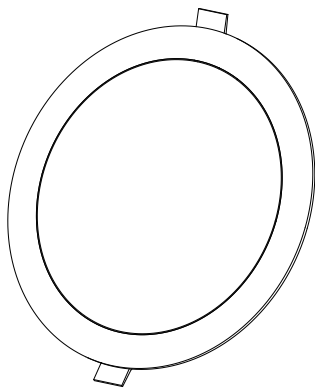


Description:
LED Panel Lamp


Main material:
Engineering plastics

Specification
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rendering, less heat, no UV or IR radiation
Build-in LED Driver
IP20

Applications
. Shopping mall
. Hotels
. Living room

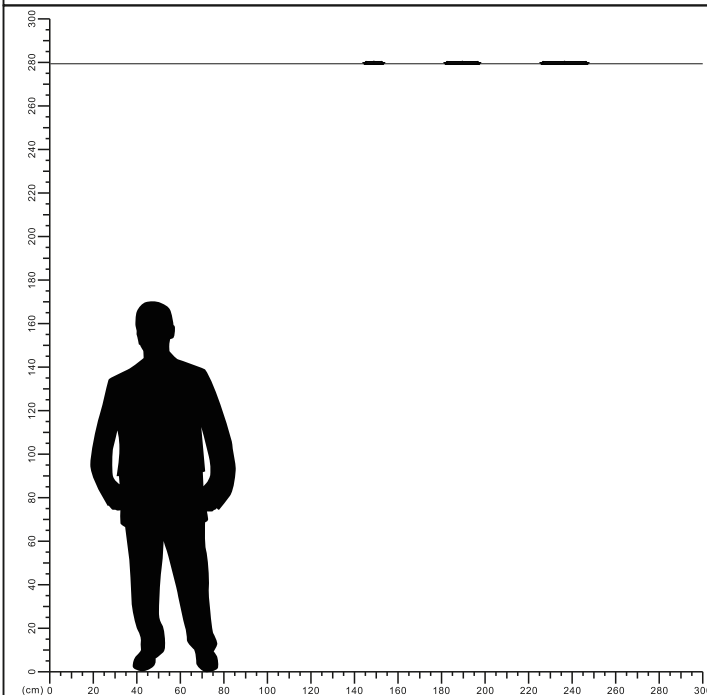


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

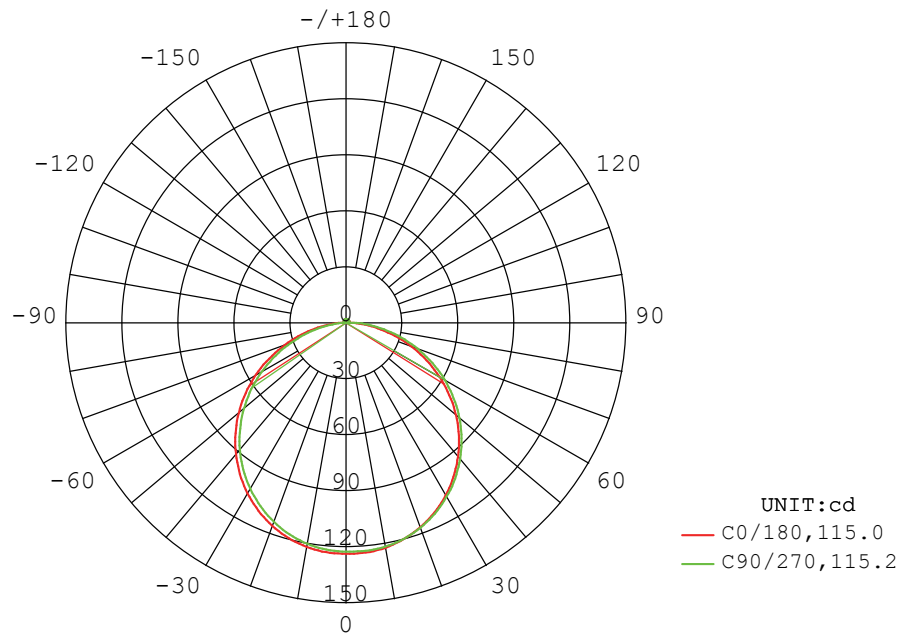


AVERAGE BEAM ANGLE (50%) : 115.1 DEG

Illuminance at a Distance

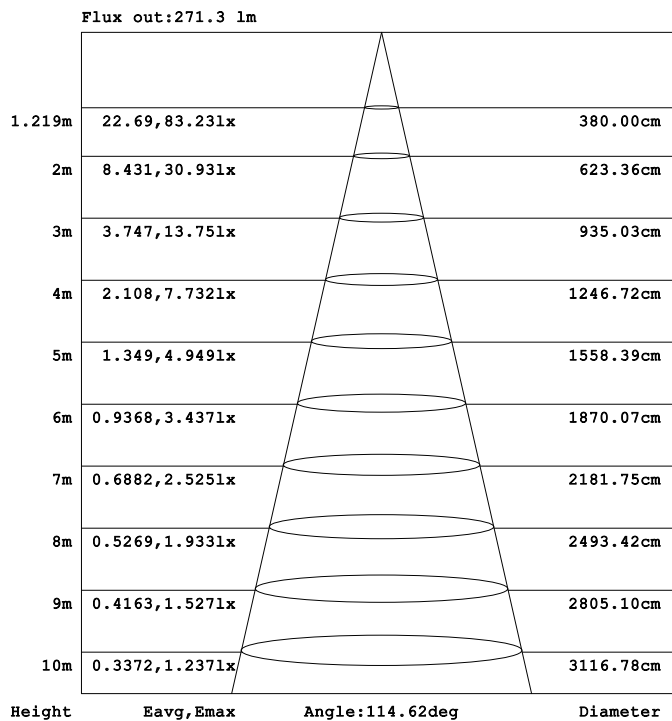


Model:HV-PL106-5

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

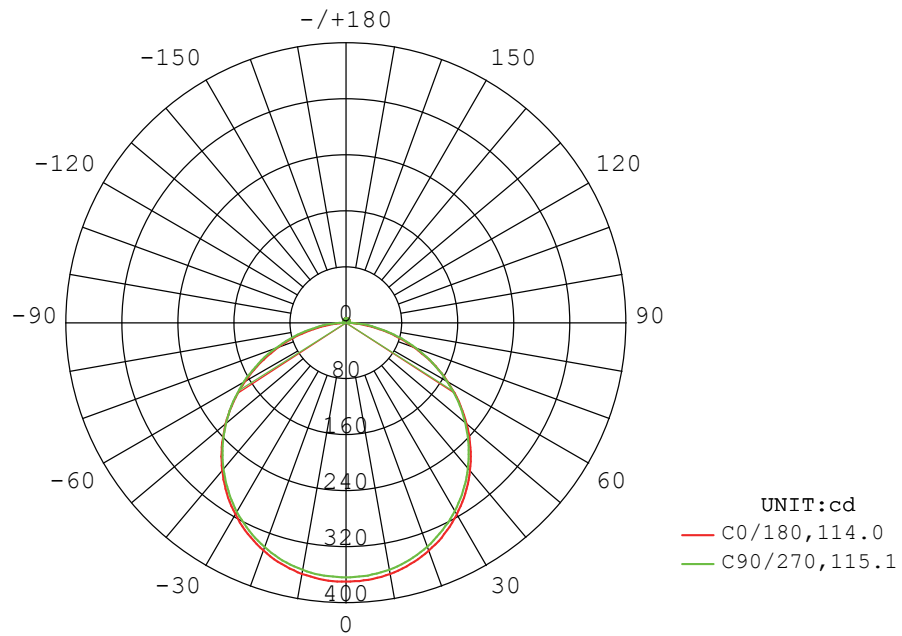


AVERAGE BEAM ANGLE (50%) : 114.6 DEG

Illuminance at a Distance

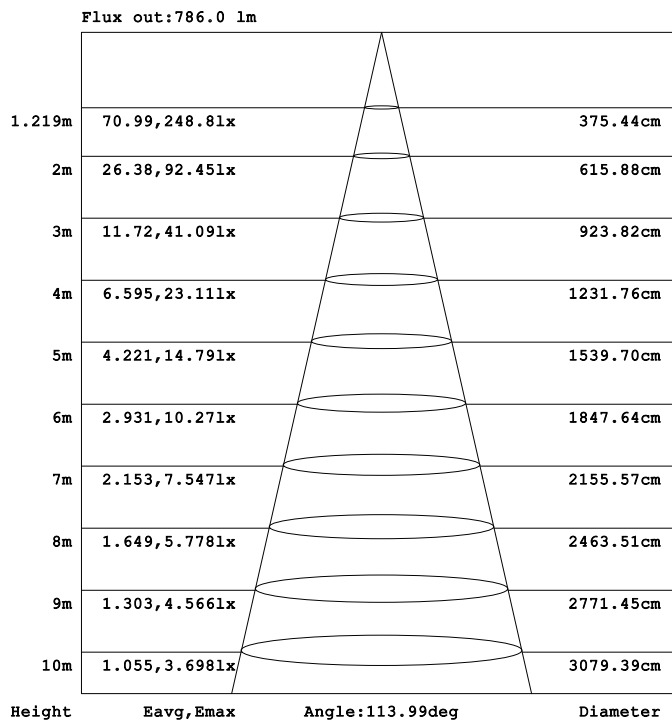


Model:HV-PL106-12

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

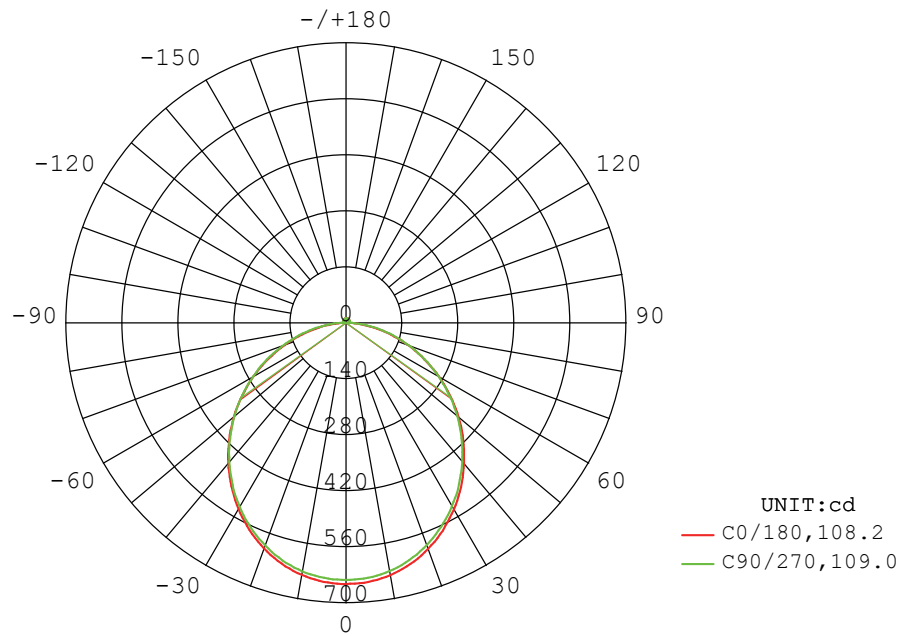

AVERAGE BEAM ANGLE (50%) : 108.6 DEG

Illuminance at a Distance

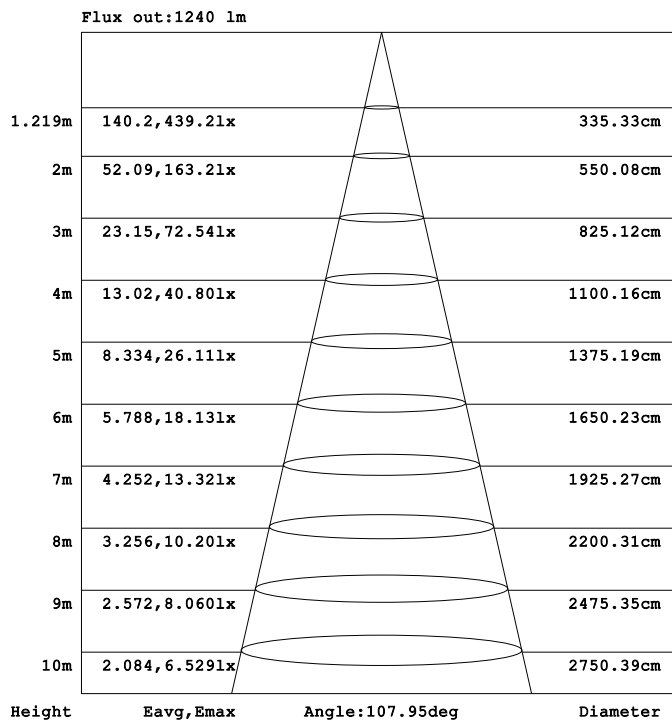

Model:HV-PL106-18

