

huem

جهاز الاسترخاء الذكي

دليل الاستخدام




رقم الموديل
MS-BL005-02

*يرجى قراءة التعليمات بعناية قبل
الاستخدام والاحتفاظ بها في مكان مناسب


المحتوى

1	العناصر
1	عناصر التحكم
2	وصف الميزة
3	إرشادات سريعة
4	إرشادات التطبيق
15	التحكم الصوتي
19	الاستخدام
29	التخصيص
30	الأسئلة الشائعة
31	الملاحظات

العناصر



شاشة عرض الوقت




مدخل الطاقة
(فولت - 2 أمبير 5)

لوحة الأزرار

مكبر الصوت

عناصر التحكم



لوحة الأزرار



الساعة



مساعد النوم



غفوة / واي فاي



مستوى الصوت



الضبط

وصف الميزة

- هذا المنتج عبارة عن منتج ذكي يدمج منه الاستيفاء ومصباح الجو الملون والضجيج الأبيض الذي يساعد على النوم.
- يتميز المنتج بتصميم صناعي مثالي على شكل فاكهة، ويمكن استخدامه منتصباً أو مسطحاً ليتيح لك تجربة إضاءة متعددة الزوايا.
- تُستخدم تقنية الإسقاط الضوئي لعرض الوقت بوضوح، ويمكن لسطح المنتج أن يتلألأ بالكامل؛ هناك 4 مستويات من السطوع يمكن ضبطها لشاشة عرض الوقت، كما يمكن إطفاء شاشة عرض الوقت تمامًا.
- يمكن تحديل تنسيق الوقت ليكون 12 أو 24 ساعة، ويمكن تطبيق معايرة الوقت التلقائية عبر الشبكة بعد توصيل الجهاز بالشبكة.
- يحاكي منبهان مستقلان تأثير ضوء شروق الشمس قبل 120-5 دقيقة مقدماً لإيقاظك، وتنشئ 5 مؤثرات صوتية طبيعية حلقة إيقاظ. عندما يرن المنبه، اضغط برفق على زر الغفوة (أو ضع الجهاز في وضع مسطح) لتفعيل وقت النوم الخفيف (الغفوة).
- يمكنك اختيار لونك المفضل من بين 16 مليون لون إبداعي وتغيير شكل ومظهر غرفتك بلمسة من إصبعك.
- يمكن تحويل الإضاءة الليلية مع جو المدفأة المريح لضبط سطوع الإضاءة، مما يسمح لك بالاسترخاء وإنهاء اليوم بشكل مثالي.
- سيؤثر الضوء على مزاجنا وسلوكنا. يمكنك استخدام المؤثرات الخاصة المصممة بشكل فريد والمتنوعة مع الجو المبهج.
- يعمل مكبر الصوت الاحترافي عالي الحساسية ذو التردد الكامل، مع النظام الصوتي الفريد من نوعه، وطابع الصوت الواضح، وجودة الصوت الرقيقة والناعمة معاً على إصدار مؤثرات صوتية متعددة الطبقات.
- يستخدم الضجيج الأبيض 11 نوعاً من الموسيقى الاحترافية، و 10 مستويات لضبط مستوى الصوت، و 10 أنواع من تأثيرات الإضاءة والمشاهد الصوتية - البصرية المتزامنة التي يمكن أن تنتهي تلقائياً خلال 120-5 دقيقة. سوف يؤثر الصوت على مزاجنا. نختار الموسيقى الاحترافية بعناية، جنباً إلى جنب مع مجموعة متنوعة من الأصوات، لتستخدمها في مشاهد مختلفة.
- التحكم عن بعد من خلال التطبيق. بغض النظر عن مكان وجودك، يتيح لك التطبيق التحكم عن بُعد في جميع وظائف الجهاز.
- يعمل دعم التحكم الصوتي مع الأجهزة الذكية الخاصة بالطرف الثالث مثل Amazon Alexa و Google Home، مما يتيح لك تشغيل أو إطفاء المنبه ومساعد النوم وما إلى ذلك من خلال الصوت، كما يتيح لك التحكم في مجموعة متنوعة من الوظائف دون تشغيل الزر.

إرشادات سريعة

وظيفة المصباح

ضوء ملون

اضغط على " " لتشغيل / إطفاء الفانوس الملون، قم بتدوير " " لضبط سطوع الإضاءة، اضغط على " " مرة أخرى لتبديل وضع الإضاءة.
اضغط مرتين " " لتبديل لون الضوء في الوضع. اضغط مطوئاً على " " لمدة 3 ثوانٍ لإطفاء الضوء.

مساعد النوم


مساعد النوم

اضغط على " " لتشغيل / إيقاف وضع مساعد النوم.
اضغط مطوئاً على " " للدخول إلى الضبط، وقم بتدوير " " لاختيار الخيارات، واضغط على " " للتطبيق.

المنبه

المنبه

اضغط على " " لتشغيل / إيقاف المنبه.
اضغط مطوئاً على " " لضبط المنبه، وقم بتدوير " " لضبط الوقت، واضغط على " " مرة أخرى لتأكيد الضبط.



وظيفة مستوى الصوت

الصوت

اضغط على " " لتشغيل ضبط مستوى الصوت، وقم بتدوير " " لضبط مستوى الصوت.

الإعدادات العامة

الضبط

اضغط على " " لضبط سطوع الشاشة.
اضغط مطوئاً على " " لضبط الوقت، قم بتدوير " " لضبط الساعة، اضغط على " " للتأكيد.

اتصال واي فاي

عند التوصل، يومض " " للدخول إلى حالة اتصال واي فاي. إذا فشل اتصال واي فاي، اضغط مطوئاً على " " للدخول إلى وضع التوافق.
إذا ظل " " ثابتاً (لا يوجد وميض على الإطلاق)، فاضغط مطوئاً على " " للدخول إلى حالة اتصال واي فاي. (يومض " ") بعد الدخول بنجاح في حالة اتصال واي فاي)

تنبيه: أثناء عملية الاتصال، إذا لم يتم اتخاذ أي إجراء في غضون 15 ثانية، فسيعرض الجهاز شاشته الرئيسية.

إرشادات التطبيق


إعداد واي فاي

1. حمل التطبيق

1. ابحث عن التطبيق "Huem" في متجر Apple Store أو Google Play.



2. امسح رمز QR الموجود على الملصق أو دليل المستخدم.



Android
5.0





iOS 10.0

التطبيق متوافق مع أنظمة Android 5.0 و iOS 10.0 والإصدارات التي تليها.

2. وضع اتصال واي فاي


1. صل الجهاز بمصدر الطاقة، يشير الوميض "📶" إلى أن الجهاز الآن في وضع اتصال واي فاي.

2. إذا ظل الرمز "📶" ثابتاً، فاضغط مطولاً على كل من الطرف الأيسر والأيمن لـ "🔌" حتى يومض "📶". يشير الوميض "📶" إلى أن الجهاز الآن في وضع اتصال واي فاي.




تنبيه: اتصل فقط بشبكة واي فاي بتردد 2.4 غيغا هرتز

3. ادخل إلى واجهة إضافة الأجهزة التي تتوافق بعرض رموز الجهاز، اضغط على "+" في الجزء العلوي الأيمن لإضافة جهاز.

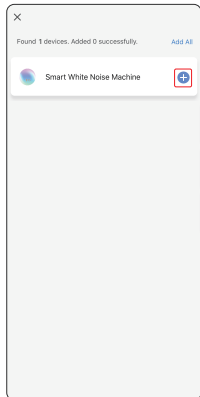


2. اضغط على "Go to add" انتقل إلى إضافة"

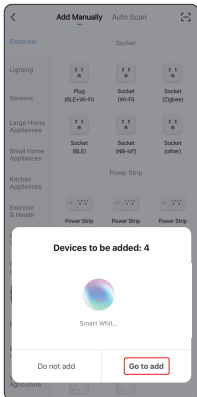


ربط الجهاز بالتطبيق

البحث التلقائي والاتصال من خلال التطبيق


1. افتح تطبيق "Huem"، اضغط على "+"

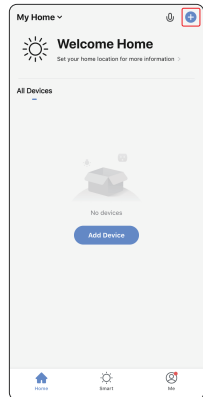


6. يمكنك تعديل اسم الجهاز إلى اسم جديد بعد أن يتصل بنجاح بشبكة واي فاي بتردد 2.4 غيغا هرتز، اضغط على "Done - تم" لإكمال عملية إعداد شبكة واي فاي، وعند إعادة الدخول إلى التطبيق، تظل "📶" ثابتة وعالية الإضاءة.



5. ضع الجهاز والهاتف الذكي والموجه في نفس المنطقة عند الاتصال، ويفضل أن يكون ذلك على مسافة قصيرة

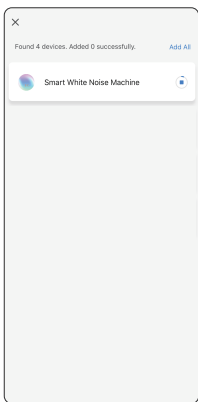


4. أدخل كلمة مرور شبكة واي فاي بتردد 2.4 غيغا هرتز واضغط على "Next - التالي" (تأكد من اتصال كل من الهاتف الذكي وتطبيق Huem بشبكة واي فاي بتردد 2.4 غيغا هرتز)



صفحة إعدادات التطبيق

1. واجهة المستخدم

شاشة عرض الوقت

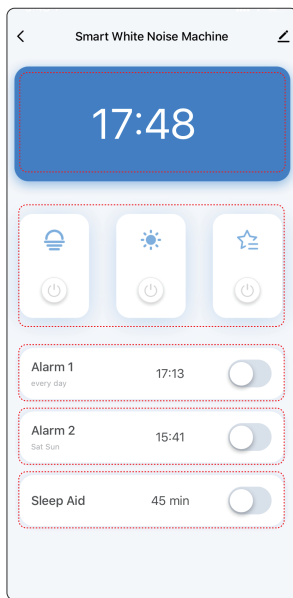

مفتاح تشغيل/ ضبط المنبه 1

مفتاح تشغيل/ ضبط المنبه 2



إعدادات الإضاءة الليلية
إعدادات الإضاءة الملونة
إعدادات الإضاءة ذات التأثير
النخاس

ضبط مساعد النوم

2. ضبط الوقت

تتم معايرة الجهاز تلقائيًا مع الوقت الفعلي بعد نجاح اتصال واي فاي، ويمكنك أيضًا معايرة الوقت يدويًا والتبديل بين نظام الساعات الأتني عشرية (نظام 12 ساعة) ونظام الوقت العسكري (نظام 24 ساعة) على التطبيق.

1. اضغط على قسم شاشة عرض الوقت للدخول إلى صفحة ضبط الجهاز، فهي تتيح لك تخصيص شاشة العرض التي تريدها مع جميع الإعدادات التفصيلية
2. اضغط على "Save - حفظ" لحفظ جميع الإعدادات ثم الخروج.



1. قم بإلغاء تحديد "network timing - توقيت الشبكة" لضبط الوقت يدويًا
2. قم بإلغاء تحديد "time mode - وضع الوقت" لإظهار نظام 12 ساعة على مدار الساعة، قم بتحديد "time mode - وضع الوقت" لإظهار نظام 24 ساعة.



1. 5 مستويات لتعديل السطوع (40%, 70%, 100%, إيقاف، 10%)
2. يخفّض الضوء الرقمي سطوعه إلى 10% خلال المدة اليومية المحددة مسبقًا عند اختيار "night mode - الوضع الليلي"
3. اضبط المدة اليومية لـ "night mode - الوضع الليلي"

1. فُعل شاشة تبديل الإضاءة. عندما تكون الإضاءة قيد التشغيل، يتم إخفاء شاشة عرض الوقت، ويتم تشغيل الضوء بالكامل
2. عندما لا يتم تفعيلها والإضاءة قيد التشغيل، يمكن للشاشة عرض الوقت.

3. ضبط الإضاءة الليلية

1. يمكنك تشغيل / إيقاف الإضاءة الليلية من الواجهة الرئيسية

2. اضغط على قسم "Night - ليلي" للدخول إلى صفحة "Night Light - الإضاءة الليلية"، واضبط مستوى السطوع.



* غيّر الاسم: يمكن تخصيص التطبيق


4. إعدادات الإضاءة الملونة

1. يمكن تشغيل / إيقاف الإضاءة الملونة للجهاز مباشرة من الصفحة الرئيسية للتطبيق
2. اضغط على منطقة "Color light - الإضاءة الملونة" للدخول إلى صفحة إعدادات "Light Switch - مفتاح الإضاءة"، ثم يمكنك تغيير الاسم وضبط سطوع ولون الإضاءة الملونة، وبعد التغيير، يرجى الضغط على "Save - حفظ".

انتباه: تغيير اللون هنا هو تغيير اللون المخصص فقط (يرجى الرجوع إلى التخصيص في " من الصفحة 27 من " Lighting effect " settings - إعدادات تأثير الإضاءة")، أما هنا فيمكن تغيير اللون المخصص فقط.
يمكن تشغيل / إيقاف الإضاءة الملونة للجهاز مباشرة من الصفحة الرئيسية للتطبيق

2. اضغط على منطقة "Color light - الإضاءة الملونة" للدخول إلى صفحة إعدادات "Light Switch - مفتاح الإضاءة"، ثم يمكنك تغيير الاسم وضبط سطوع ولون الإضاءة الملونة، وبعد التغيير، يرجى الضغط على "Save - حفظ".


انتباه: تغيير اللون هنا هو تغيير اللون المخصص فقط (يرجى الرجوع إلى التخصيص في " من الصفحة 27 من " Lighting effect settings - إعدادات تأثير الإضاءة")، أما هنا فيمكن تغيير اللون المخصص فقط.



* غير الاسم: يمكن تخصيص التطبيق

5. إعدادات الإضاءة ذات التأثير الخاص

1. يمكن تشغيل / إيقاف الإضاءة ذات التأثير الخاص للجهاز مباشرة من الصفحة الرئيسية للتطبيق
2. اضغط على منطقة " Special-effect light " - الإضاءة ذات التأثير الخاص" للدخول إلى صفحة إعداد "Ambilight"، ثم يمكنك تغيير الاسم، وضبط سطوع الإضاءة، وتحديد نوع تأثير الإضاءة
3. اضغط على " Edit - تحرير"، اضغط على كل رمز من رموز الإضاءة ذات التأثير الخاص، يمكنك تغيير نمط وسرعة تأثير الإضاءة المستهدفة، وبعد التغيير يرجى الضغط على " Save - حفظ".

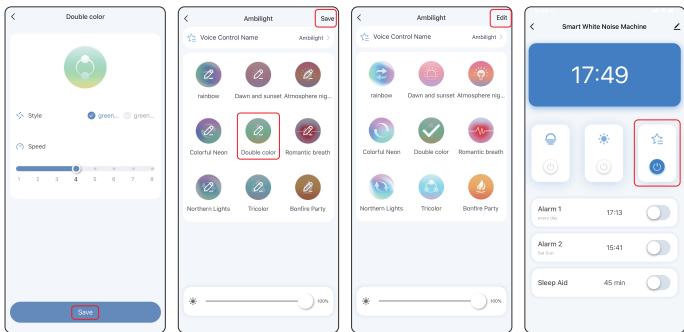

* غيّر الاسم: يمكن تخصيص التطبيق

6. ضبط المنبه




- تنبيه: تم ضبط مجموعتين من المنبهات بنفس الطريقة. يمكن لزر المنبه الموجود في الجزء الخلفي من الجهاز تشغيل "المنبه 1" فقط مع إيقاف جميع المنبهات.

لتأخذ المنبه 1 كمنال

1. أنت قادر على تشغيل / إيقاف كل من المنبهين (المنبه 1 والمنبه 2) من الواجهة الرئيسية

2. اضغط على منطقة "Alarm 1 - المنبه 1" للدخول إلى صفحة "Alarm 1 settings - إعدادات المنبه 1"، وعندئذ يمكنك تحديد معالم مثل "وقت البدء (Start time)، وتعديل الاسم (Change name)، ووقت التكرار (Repeat time)، وموسيقى التنبيه (Alarm music)، والمؤثرات الصوتية (Sound effects)، ووقت التنبيه (Alarm time)، وضوء المنبه (Alarm light)، ووقت تشغيل الإضاءة مسبقاً (Lighting time in advance)، والغفوة (Snooze) "وما إلى ذلك، بعد تغيير الإعدادات، يرجى الضغط على "Save - حفظ"
3. أثناء رنين المنبه: اضغط على "Stop - إيقاف" في الصفحة الرئيسية من التطبيق لإيقاف المنبه. اضغط على "Snooze - غفوة" للدخول إلى وضع الغفوة.

* يمكنك أيضًا دفع الجهاز برفق نحو الأسفل أو جعله مستقيمًا أثناء الغفوة لتفعيل وضع الغفوة.

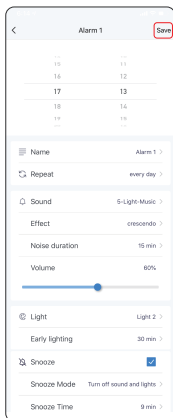



* غير الاسم: يمكن تخصيص التطبيق

7. إعدادات مساعد النوم

1. أنت قادر على تشغيل / إيقاف وضع مساعد النوم من الواجهة الرئيسية

2. اضغط على قسم "Sleep Aid - مساعد النوم"، وادخل إلى صفحة "Sleep Aid Setting - ضبط مساعد النوم"، وخصص جميع الإعدادات حسب رغبتك



3. اضغط على "Save - حفظ" للحفاظ والخروج.

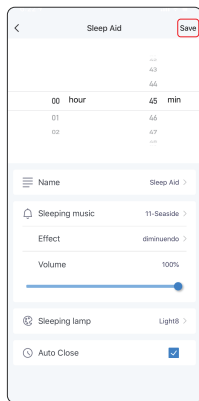

* غيّر الاسم: يمكن تخصيص التطبيق

8. إعدادات أخرى

اضغط على "✎" في الزاوية اليمنى العليا للدخول، حيث يمكنك في هذه الشاشة استعراض معلومات الجهاز، وإرشادات التحكم من خلال طرف ثالث، والاستيقاظ في وضع عدم الاتصال، وحذف الجهاز وما إلى ذلك.

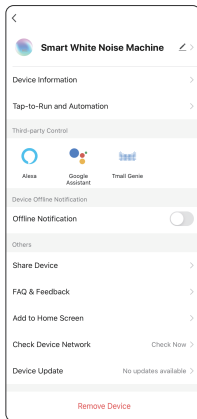




* غيّر الاسم: يمكن تخصيص التطبيق

التحكم الصوتي


لنأخذ إعداد الاتصال مع "Alexa" كمثال

تنبيه: تأكد من أن الجهاز متصل بتطبيق Huem

1. حمل تطبيق "Amazon Alexa" من متجر Google Play / App Store وقم بالتسجيل (إذا كنت بالفعل أحد مستخدمي Alexa, فيمكنك فتحه مباشرة)
2. اختر المهارات والألعاب (Skills&Games), وابحث عن Huem وقم بتمكينها.

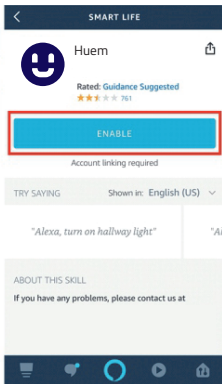
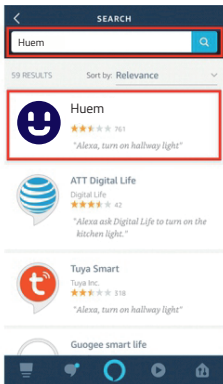
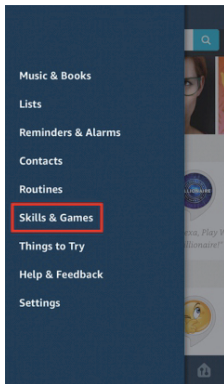


3. سجّل الدخول إلى Alexa Huem بنفس اسم المستخدم وكلمة المرور اللذين تستخدمهما لتطبيق Smart Life واضغط على "Authorize - تفويض". ستصبح قادراً على التحكم بالجهاز عن طريق الصوت من خلال (Amazon Echo (Alexa بعد ظهور رسالة "Huem has been successfully linked - تم ربط Smart Life بنجاح"

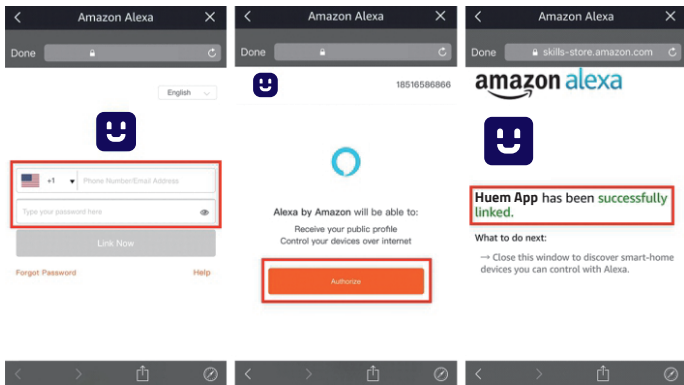

4. افتح تطبيق Huem للتحقق مما إذا تم ربط عنصر تحكم الطرف الثالث، إذا ظهرت كلمة "Yes - نعم"، فهذا يعني أن الحسابين مرتبطان على السحابة. يمكن إعادة تسمية الجهاز باستخدام تطبيق Smart Life وسيقوم Alexa تلقائيًا بمزامنة الاسم الجديد السحابة.

تنبيه: يمكنك أيضًا جعل Alexa تكتشف جهازًا جديدًا وتكرر عملية الربط لإعادة الارتباط بالجهاز تسميته عبر تطبيق Huem. (عملية اختيارية فقط)

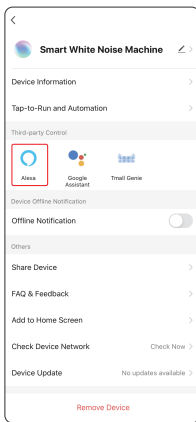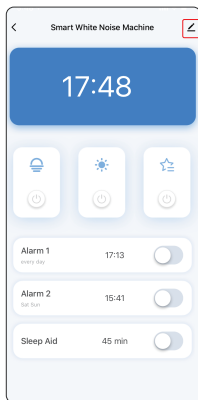

توضيح التحكم الصوتي

يمكنك إعادة تسمية جميع وظائف الجهاز، وستقوم Alexa بالمرامنة مع الأسماء الجديدة والتعرف عليها كأوامر صوتية. يعمل مع المنزل الذكي Alexa / Google.

تنبيه: قد يحدث تأخير طفيف بسبب الاختلاف بين سرعة شبكة واي فاي ونظام المعالجة السحابية، عندما يفشل الجهاز أو Alex في الاستجابة للتحكم الصوتي، يرجى الانتظار لبضع دقائق والمحاولة مرة أخرى.

يمكنك التحكم بالجهاز عن طريق الصوت: تشغيل الإضاءة الليلية، وتغيير سطوع الإضاءة الليلية، وتغيير لون الضوء، وتشغيل المنبه، وتشغيل مساعد النوم.

إليك بعض الأوامر لتجربتها

"Alexa، قومي بتشغيل / إيقاف الإضاءة الليلية"

"Alexa، قومي بضبط الإضاءة الليلية إلى 20%"

"Alexa، قومي بتشغيل / إيقاف الإضاءة الملونة"

"Alexa، قومي بتغيير الإضاءة الملونة إلى اللون الأحمر"

"Alexa، قومي بتشغيل / إيقاف المنبه"



"Alexa، قومي بتشغيل / إيقاف مساعد النوم"

الاستخدام



ضبط الوظائف

1. ضبط الوقت والتاريخ

1. مل الجهاز بمصدر الطاقة، اضغط مطولاً على " " للدخول إلى ضبط الوقت



2. قم بتدوير " " لتغيير الساعة، اضغط على " " للتأكيد والتطبيق والانتقال إلى ضبط الدقائق
3. قم بتدوير " " لضبط الدقائق، اضغط على " " للتأكيد، اختر وضع الوقت 12 / 24 ساعة



2. التحكم في السطوع

عندما يكون مصدر الطاقة الخارجي في وضع التشغيل، اضغط على "☀️" لضبط سطوع شاشة عرض الوقت.

1. يدعم اختيار 5 أنواع من سطوع الشاشة: 40%، 70%، 100%، إيقاف، 10%، تتغير حالة إضاءة الجهاز وفقاً لاختيار التطبيق.
2. السطوع الافتراضي هو 40% عند التشغيل الأول.



40%



70%



100%



OFF



10%

المنبه

1. تشغيل / إيقاف المنبه

2. بعد تشغيل المنبه، اضغط على "🔔" لإيقاف المنبه، وسيظف رمز المنبه المقابل أيضاً.

1. في واجهة شاشة عرض الوقت، اضغط على "🔔" لتشغيل المنبه. تشير الأضواء الرقمية الواضحة إلى وقت التنبيه، ويظل رمز المنبه المقابل ثابتاً.





تنبيه: يمكن للجهاز ضبط منبه لأيام الأسبوع ومنبه لأيام نهاية الأسبوع عبر تطبيق Huem مباشرة.

ضبط المنبه



2. قم بتدوير "⌚" لتغيير الساعة، اضغط على "⌚" للتطبيق والانتقال إلى ضبط الدقائق

1. في واجهة شاشة عرض الوقت، اضغط مطولاً على "⌚" للانتقال إلى وضع ضبط المنبه، سيومض رمز المنبه




4. قم بتدوير "⌚" لاختيار صوت المنبه (01-5 إلى 05-5 هي أصوات الغفوة)، اضغط على "⌚" للتطبيق وإكمال ضبط المنبه

3. قم بتدوير "⌚" لتغيير الدقائق، اضغط على "⌚" لإكمال ضبط الوقت والانتقال إلى اختيار صوت المنبه




6. قم بتدوير "⊙" لضبط تأثير الإضاءة مسبقًا (11 نوعًا من تأثيرات الإضاءة من E-01 إلى E-11 اختياريًا)، اضغط على "⊙" للتأكيد والانتقال إلى إعدادات سطوع الإضاءة




النتيجة: بعد ضبط وضع إضاءة المنبه، يمكن أن يؤدي تأثير الضوء المحدد في وضع إضاءة المصباح إلى تغيير تأثير إضاءة المنبه.


8. قم بتدوير "⊙" لضبط وقت تشغيل الإضاءة مسبقًا (يتم ضبط الوقت من 005 إلى 120 دقيقة)، اضغط على "⊙" للتأكيد وإكمال ضبط المنبه.



5. قم بتدوير "⊙" لضبط مستوى صوت المنبه (يتراوح مستوى صوت المنبه من U-01 إلى U-10)، اضغط "⊙" للتأكيد والانتقال إلى اختيار تأثير الإضاءة مسبقًا



7. قم بتدوير "⊙" لضبط سطوع الإضاءة (8 مستويات من السطوع الإضاءة تتراوح من L-01 إلى L-08)، اضغط على "⊙" للتأكيد والانتقال إلى ضبط وقت تشغيل الإضاءة مسبقًا





تنبيه: يمكن تشغيل الإضاءة التي تم ضبطها بواسطة المنبه مسبقًا ويمكن الضغط مطولًا (3 ثوان) على "⊙" لإطفاء الإضاءة.

الغفوة (يمنحك عدة غفوات لمدة 9 دقائق قبل الاستيقاظ تمامًا)

تنشيط / إلغاء تنشيط وضع الغفوة

2. في وضع الغفوة، اضغط على المنبه المقابل
للخروج "⌚" / "⌚" / "⌚"



1. أثناء رنين المنبه اضغط على "⌚" / "⌚"
لانتقال إلى وضع الغفوة (يتوقف صوت المنبه مؤقتًا لمدة 9
دقائق)، تومض الأرقام الضوئية. يمكنك الدخول في وضع
الغفوة بشكل متكرر حتى 5 مرات



* يمكنك أيضًا دفع الجهاز برفق نحو الأسفل أو جعله مستقيمًا أثناء الغفوة لتفعيل وضع الغفوة.

* أثناء رنين المنبه اضغط على "⌚" / "⌚" / "⌚"
للإيقاف.

3. اضغط مرتين "⌚" للإيقاف المنبه تمامًا.





تنبيه: يتم إيقاف المنبه تلقائيًا بعد 30 دقيقة من الرنين دون إجراء أي عملية على الجهاز

وضع مساعد النوم

1. تنشيط / إلغاء تنشيط وضع مساعد النوم

2. اضغط على "☾" / "☀️" لإلغاء تنشيط وضع مساعد النوم، وسيختفي رمز مساعد النوم.



1. في واجهة شاشة عرض الوقت، اضغط على "☾" لتشغيل مساعد النوم، سيتم عرض المدة المحددة مسبقاً لوضع مساعد النوم لمدة 3 ثوانٍ مع بقاء رمز مساعد النوم ثابتاً



2. إعدادات مساعد النوم



2. قم بتدوير "⚙️" لاختيار صوت مساعد النوم (01-5 إلى 11-5 عبارة عن ضجيج أبيض يساعد على النوم ويحاكي أصوات الطبيعة الرائعة)، اضغط على "☾" للتطبيق والانتقال إلى التحكم بسطوع الإضاءة

1. في واجهة شاشة عرض الوقت، اضغط مطولاً على "☾" للانتقال إلى وضع ضبط مساعد النوم، سيومض رمز مساعد النوم



4. قم بتدوير " ⚙️ " لاختيار تأثير إضاءة مساعد النوم (10 أنواع من تأثيرات الإضاءة من E-01 إلى E-10 اختياريًا)، اضغط على مفتاح " 🌙 " للتأكيد والانتقال إلى إعدادات سطوع الإضاءة




3. قم بتدوير " ⚙️ " لضبط مستوى صوت مساعد النوم (بترولوج مستوى صوت مساعد النوم من U-01 إلى U-10)، اضغط على مفتاح " 🌙 " للتأكيد والانتقال إلى اختيار تأثير إضاءة مساعد النوم



تنبيه: بعد ضبط وضع إضاءة مساعد النوم، يمكن أن يؤدي تأثير الإضاءة المحدد في وضع الإضاءة إلى تغيير تأثير إضاءة مساعد النوم.

6. قم بتدوير " ⚙️ " لضبط مدة وضع مساعد النوم (من 5 إلى 120 دقيقة، 30 دقيقة افتراضيًا)، اضغط على " 🌙 " للتطبيق وتنشيط وضع مساعد النوم.


5. قم بتدوير " ⚙️ " لضبط سطوع الإضاءة (8 مستويات من سطوع الإضاءة من L-01 إلى L-08)، اضغط على " 🌙 " للتأكيد والانتقال إلى ضبط وقت مساعد النوم



وظيفة تعديل مستوى الصوت




عندما يرن المنبه أو صوت مساعد النوم، اضغط على " 🔊 " لتشغيل وظيفة ضبط مستوى الصوت، ثم قم بتدوير " ⚙️ " لضبط مستوى الصوت.

تنبيه: عندما يرن المنبه أو صوت مساعد النوم، يمكنك تدوير ضبط سطوع الإضاءة المحدد مسبقًا



وظيفة الإضاءة الملونة





1. تشغيل / إيقاف الإضاءة الملونة
2. عندما تكون الإضاءة قيد التشغيل، اضغط مطولاً على  لمدة 3 ثوانٍ لإيقاف الإضاءة الملونة.
1. عندما يكون مصدر الطاقة الخارجي في وضع التشغيل، اضغط على  لتشغيل الإضاءة الملونة؛ (مستوى السطوع الافتراضي هو 8



تنبيه: عندما تكون الإضاءة الملونة قيد التشغيل، اضغط على  لضبط سطوع شاشة عرض الوقت أو إيقاف شاشة عرض الوقت

2. تعديل السطوع

1. عندما تكون الإضاءة قيد التشغيل، قم بتدوير  باتجاه عقارب الساعة لرفعها.
2. عندما تكون الإضاءة قيد التشغيل، قم بتدوير  عكس اتجاه عقارب الساعة لخفضها.



3. تبديل تأثير الإضاءة


عملية تبديل تأثير الإضاءة، انظر الشكل أدناه للحصول على التفاصيل.

عندما تكون الإضاءة قيد التشغيل، لنأخذ عمليات تبديل تأثير الإضاءة من النوع 1 والنوع 2 كمثال:
 ضغطة واحدة "⊙": اضغط للانتقال من النوع 1 إلى النوع 2.

ضغطة مزدوجة "⊕": بافتراض أن الجهاز في حالة تأثير الإضاءة من النوع 1، اضغط مرتين "⊕" لتبديل تأثيرات الإضاءة بشكل دائري في النوع 1.

* يمكن ضبط الألوان المخصصة في "Ⓜ" من خلال التطبيق، يرجى الرجوع إلى مقدمة وظيفة التطبيق - وضع الفانوس

انتباه: يمتلك هذا المنتج وظيفة ذاكرة، وسيتم استخدام كل تغيير في تأثير الإضاءة كتأثير إضاءة افتراضي لاحقاً.

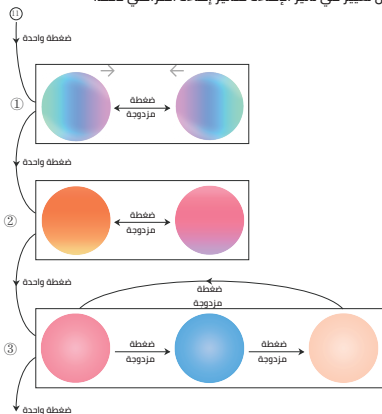


↓ ضفطة واحدة



ضفطة واحدة



ضفطة واحدة




ضفطة واحدة



ضفطة واحدة





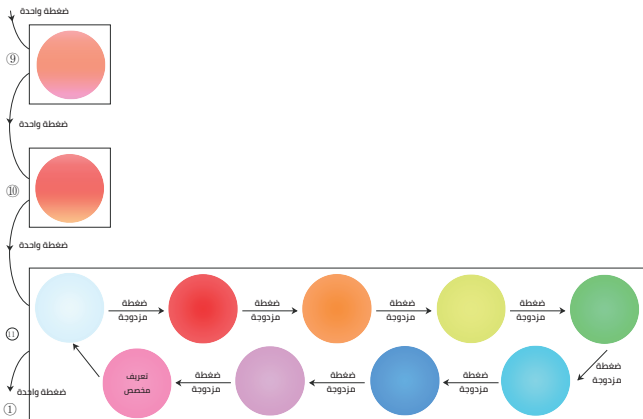


ضفطة واحدة



Specifications

MS-BL005-02	الموديل
MS-WU102-W-RGB	خود المنتج
PC,ABS,Metal	المادة
White	اللون
180*180*90.3mm	الحدم
556g	الوزن
5V-2A	مشترك كهربائي
10W(MAX)	الطاقة

100-240V	المدخل
WiFi 2.4Ghz & Bluetooth	وضع الاتصال
Smart white noise machine, Use guide, Adapter (optional), charging cable (optional)	قائمة التعبئة
    	الشهادة
4Ω 2W	مكبر الصوت
Button control, APP control and Voice control	وضع التحكم

الأسئلة الشائعة

1. لا يمكن توصيل الجهاز ؟

1. يرجى وضع الموجه والمعدات والهاتف المحمول في نفس المنطقة؛ ويفضل أن تكون أقرب ما يمكن إلى بعضها البعض. **1. لا يمكن توصيل الجهاز ؟**

1. يرجى وضع الموجه والمعدات والهاتف المحمول في نفس المنطقة؛ ويفضل أن تكون أقرب ما يمكن إلى بعضها البعض.
2. يرجى التأكد من أن إشارة الواي فاي في منطقتك طبيعية. (بدعم شبكة واي فاي بتردد 2.4 غيغا هرتز فقط)
3. يرجى الضغط مطولاً على " " لإعادة الدخول إلى وضع شبكة التوزيع ومحاولة الاتصال بشبكة التوزيع مرة أخرى.

2. لم يعد بالإمكان فجأة التحكم في الجهاز من خلال التطبيق؟

1. قد تكون الشبكة أو الجهاز غير متصل بالإنترنت.
1. يرجى التأكد من تشغيل الجهاز.
2. يرجى التأكد من أن إشارة الواي فاي طبيعية (بدعم شبكة واي فاي بتردد 2.4 غيغا هرتز فقط). يوصى بإبقاء التطبيق قيد التشغيل لمدة 3 دقائق تقريباً لمعرفة ما إذا كان الجهاز لا يزال متصلاً بالإنترنت.
3. إذا كنت لا تزال متصلاً بالإنترنت، فيرجى وضع هاتفك بجوار الجهاز، ثم الاتصال بنفس شبكة الواي فاي التي يتصل بها ومحاولة فتح صفحة الويب لمعرفة ما إذا كان تحديد حالة الشبكة أمراً سهلاً.
4. اخرج من التطبيق الذي يعمل في خلفية الهاتف، ثم افتح التطبيق مرة أخرى، وحاول مجدداً.

3. كيفية إعادة تعيين الواي فاي؟

عند إطفاء الضوء وتوصيله بمصدر الطاقة، اضغط على الزر لفترة طويلة حتى يومض الجهاز.

4. لا يمكن مزامنة حالة الجهاز مع حالة شاشة العرض على التطبيق؟

1. يرجى التأكد من أن الجهاز متصل بالإنترنت
2. بعد تشغيل الجهاز باستخدام التطبيق، تحقق لمعرفة ما إذا كانت حالة الجهاز متزامنة مع حالة شاشة العرض في التطبيق
5. بعد اتصال الجهاز بالإنترنت، يمكن التحكم به في نفس الموقع، ولكن لا يمكن التحكم في به عن بُعد من خلال الهاتف المحمول من عنوان آخر أو شبكة أخرى.

1. يرجى التأكد من أن الجهاز متصل بالإنترنت.

2. بعد تشغيل الجهاز باستخدام التطبيق، تحقق لمعرفة ما إذا كانت حالة الجهاز متزامنة مع حالة شاشة العرض في التطبيق

6. غير ذلك


إذا كان الجهاز متصلاً بالشبكة بشكل صحيح ولا زلت تعاني من حدوث واحدة أو أكثر المشكلات المذكورة أعلاه، فالرجاء الانتقال إلى الصفحة الرئيسية للتطبيق الخاص بالجهاز، والضغط على "✍" في الزاوية اليمنى العليا، والدخول إلى صفحة "FAQ and feedback - الأسئلة الشائعة والتعليقات"، والضغط على "Continue to feedback - المتابعة إلى التعليقات"، وإدخال المشكلة التي تواجهك وإرسالها.


ملاحظات

- يرجى مسح هذا المنتج بقطعة قماش ناعمة.
- لا تفرك هذا المنتج بمواد تنظيف كاشطة أو مواد كيميائية خشنة أو كحول أو عوامل تنظيف كالأسيتون، وما إلى ذلك، لتجنب تلف سطح المنتج.
- احتفظ بالمنتج في مكان آمن وجاف بحيث لا يتعرض للتكديس أو الرض أو التلف.
- لا تلف سلك الطاقة حول الجهاز عند تخزين المنتج.
- يرجى استخدام محول الطاقة المرفق (5 فولت - 2 أمبير) لتجنب تلف الجهاز.
- يرجى استخدام هذا المنتج بشكل صحيح وفقاً للتعليمات، يحظر تمامًا تفكيك هذا المنتج.
- يرجى وضع المنتج على سطح أفقي ثابت غير أملس.
- لا تستخدم المنتج في البيئات ذات الحرارة أو الرطوبة العالية أو البيئات المسببة للتآكل، وذلك لتجنب التسرب الناتج عن تلف الدارة.
- يرجى الاعتناء بالمنتج جيداً وعدم السماح للأطفال باستخدام المعدات الكهربائية كألعاب لتجنب الحوادث.
- هذا المنتج غير مقاوم للحريق، يرجى عدم رميه في النار، وإبعاده عن مصدر النار.
- هذا المنتج غير مقاوم للماء، يرجى عدم وضعه في الماء، لتجنب التلف.

hvem

بيانات التواصل

800 430 0030 

059 404 9274 

huem

Smart White Noise Machine

User Manual




Model Number
MS-BL005-02

*Please read the instructions carefully before use and keep it with proper storage


TABLE OF CONTENTS

Elements	1
Controls	1
Feature Description	2
Quick Guidance	3
App Guidance	4
Voice Control	15
Usage	19
Specifications	29
FAQ	30
Notes	31

Elements



Time display

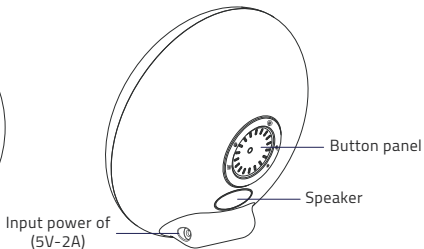


Button panel

Speaker

Input power of
(5V-2A)

Controls



Button panel



Clock



Sleep-Aid



Snooze/Wi-Fi



Volume



Setting

Feature Description

- This product is a smart product integrating wake-up alarm clock, colorful atmosphere lamp and sleep-conductive white noise.
- The product has perfect industrial design, with fruity shape, and can be upright or flat in use to let you have a multi-angle lighting experience.
- The light projection display technology is used to project a clear time, and the whole surface of the product can luminescence; there are 4 levels of brightness of the time display to be adjusted, and the time display can be turned off completely.
- The time format can be switched to be 12 or 24H, and the network automatic time calibration can be applied after the device is connected to the network.
- Two sets of independent alarm clock simulate the sunrise light effect 5-120 minutes in advance to wake you up, and 5 natural sound effects build wake-up ring. When the alarm clock rings, gently press the snooze button (or flat device) to get into the light sleep (snooze) time.
- With 16 million creative colors, you can make out your favorite color by a touch of your finger and change the look and feel of your room.
- The night light with relaxing fireplace atmosphere can be rotated to adjust light brightness, letting you relax and end the day perfectly.
- Light will affect our mood and behavior. The uniquely designed and various special effects with dazzling atmosphere are for you to use.
- Full-frequency high-sensitivity professional loudspeaker, with unique cavity acoustic system, through the clear and bright timbre and the delicate and soft sound quality, can release a more layered sound effect.
- White noise owns 11 kinds of professional music, 10 levels of volume adjustment range, 10 types of lighting effects, and acousto-optic synchronous scenes that can end automatically in 5-120 minutes. Sound will affect our mood. We carefully select professional music, combined with a variety of lights, for you to use in different scenes.
- APP remote control. No matter where you are, APP allows you to remotely control all the functions of the device.
- Voice control support works with third-party smart devices like Amazon Alexa and Google Home, enabling you to turn on or off your alarm clock, sleep aid, etc. by voice and control a variety of functions without button operation.



Quick Guidance

Lamp Function



Colorful Light


press  to switch on/off coloured lantern, rotate  to configure the Light Brightness, Click  again to switch the light mode.




Double-click  to switch the light color in mode. Long press  for 3S to turn off the light.

Sleep-Aid



Sleep-Aid

Press  to switch on/ off sleep-aid mode.




Press and hold  to enter setting, rotate  to choose options, press  to apply.


Alarm Clock



Alarm

Press  to turn on/ off the alarm.



Press and hold  to set the alarm, rotate  to adjust the time, and click  again to confirm the setting.



Volume Function



Volume




Click  to turn on the volume adjustment, rotate  to adjust the volume.

General settings





Setting

Press  to adjust the brightness of the screen.

Long press  to set time, rotate  to configure the clock, click  to make confirmation.

Wi-Fi Connecting

Plug in,  flashes to enter Wi-Fi connecting status. If Wi-Fi connection fails, press and hold  to enter compatible mode.

If  stays solid (no flashing at all), press and hold  to enter Wi-Fi connecting status. ( flashes after successfully entered Wi-Fi connecting status)

Attention: During the connecting process, if there is no action within 15 seconds, machine would resume to its home screen.

App Guidance

Wi-Fi setup

1. App Download

1. Search the App "Huem" from Apple Store or Google Play.










2. Scan the QR code from the label or user manual.



The App is compatible with Android 5.0 and iOS 10.0 and higher version.


2. Wi-Fi connecting mode

- 1 Plug in to power, the flashing  indicates the machine is now under Wi-Fi connecting mode;
- 2 If the  stays solid, press and hold both left and right end of  till  flashes. Again, the flashing indicates machine  is now under Wi-Fi connecting mode.



Attention: Only connects to 2.4 GHz Wi-Fi

Log in / Register App






Connect device to APP

App auto-search and connect


① Open up "Huem" App, click " + ";

② Click on "Go to add" ;


③ Enter the add devices interface, accompanied with the display of device icons, click " + " at the top right to add device.

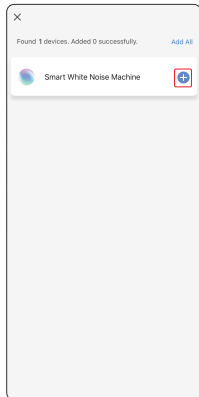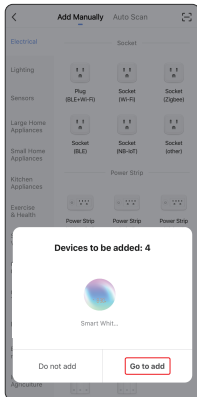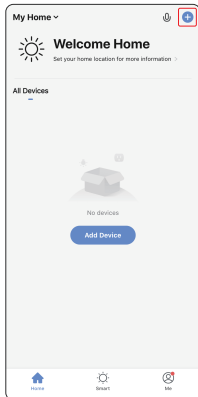


④ Type in 2.4 GHz Wi-Fi password and click on "Next" (make sure the smartphone and Huem app are both connected to 2.4 GHz Wi-Fi);

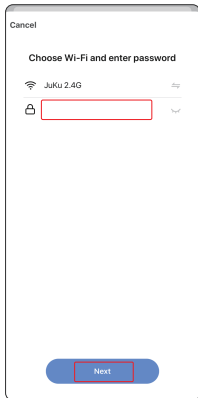

⑤ Put machine, smartphone and the router in the same area when connecting, preferably short distance;

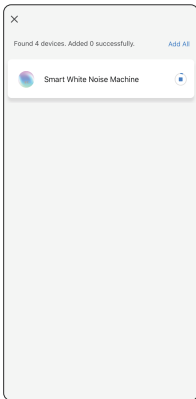


⑥ You can edit a new name for machine after it successfully connects to your 2.4 GHz Wi-Fi, click on "Done" to complete the Wi-Fi setup process, when re-entering the App, the "📶" stays solid and high-lighted.

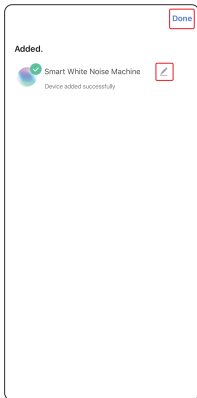

App settings page

1. User interface



Time display

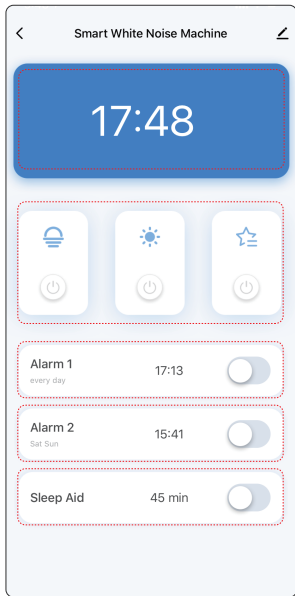

2. Time setting

Machine automatically calibrates with real time after successful Wi-Fi connection, you can also manually calibrate the time and switch between duodecimal hour system (12-hour clock) and military time(24-hour clock) on the app.

- ① Tap the time display section to enter machine setting page, it allows you to customize your desired screen display with all the detailed settings;
- ② Click "Save" to save all the settings and exist.

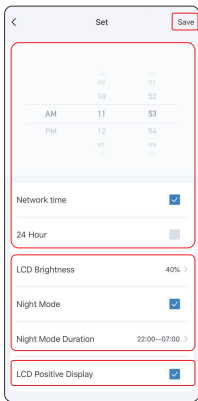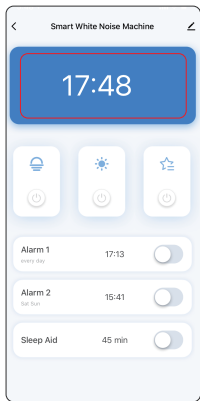

① Uncheck the "network timing" to manually adjust the time;

② Uncheck the "time mode" to show 12-hour clock system, check the "time mode" to show 24-hour clock system.

① 5 levels of brightness adjustment (40%, 70%, 100%, OFF, 10%);

② The digital light dims its brightness to 10% within the preset daily duration when choosing the "night mode";



③ Set the daily duration for "night mode".

① Tick the switch light display. When the light is on, the time display is hidden, and the whole light turns on;

② When it is not ticked and the light is on, the screen can display the time.

3. Night light setting

- ① You are able to turn on/off night light from the main interface;
- ② Tap "Night" section to enter "Night Light" page, adjust the brightness level.

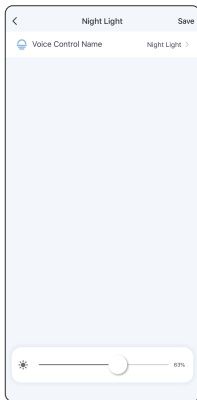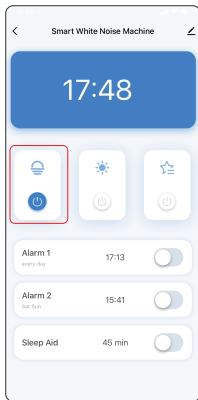


* Change the name: The APP can be customized

4. Color light settings

- ① The color light of device can be turned on / off directly on the main page of APP;
- ② Click the "Color light" area to enter into the "Light Switch" settings page, then you can change the name, adjust the brightness and color of the color light, after the change, please click "Save".


Attention: The change of the color here is only the change of the custom color (please refer to the customization in ⑬ on P27 of "Lighting effect settings"), and the custom color can only be changed here.

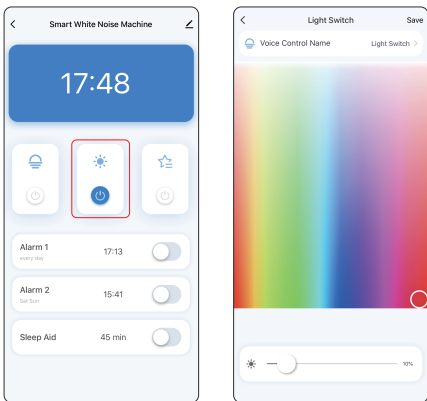

* Change the name: The APP can be customized

5. Special-effect light Settings

- The special-effect light of device can be turned on / off directly on the main page of APP;
- Click the "Special-effect light" area to enter into the "Ambilight" setting page, then you can change the name, adjust the brightness of the light effect, and select the type of the light effect;
- Click "Edit", click each special-effect light icon, you can change the style and speed of the target light effect, after the change, please click "Save".

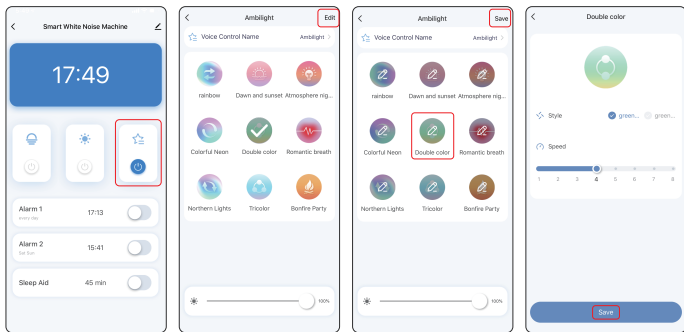

* Change the name: the APP can be customized

6. Alarm clock setting

Attention: Two sets of alarm clocks are set in the same way. The alarm clock button on the back of the device can only turn on "alarm clock 1" but turn off all alarm clocks.

Take Alarm clock 1 as a demonstration




- You are able to turn on/off both alarm clocks (alarm clock 1 and alarm clock 2) from the main interface;



② Click the "Alarm 1" area to enter into the "Alarm 1 settings" page, then you can set parameters such as "Start time, Change name, Repeat time, Alarm music, Sound effects, Alarm time, Alarm light, Lighting time in advance, Snooze" and so on, after change of the settings, please click "Save" ;

③ During the alarm rings: Click "Stop" on the main page of APP to turn off the alarm clock; click "Snooze" to enter into the snooze mode.



* You can also gently push down/ set upright the device during the snooze to switch on snooze mode.

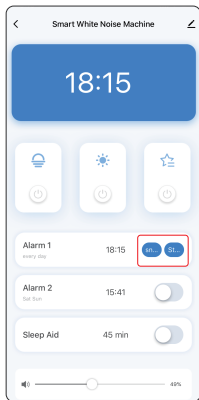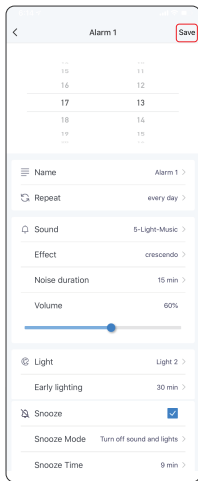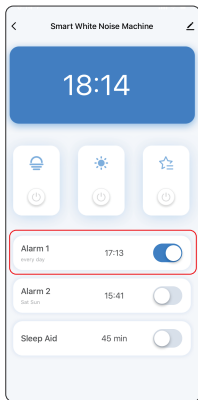

* Change the name: The APP can be customized

7. Sleep-aid settings



- ① You are able to turn on/off sleep-aid mode from the main interface;
- ② Tap "Sleep Aid" section, enter the "Sleep Aid Setting" page, customize all the settings to your liking;
- ③ Tap "Save" to save and exit.

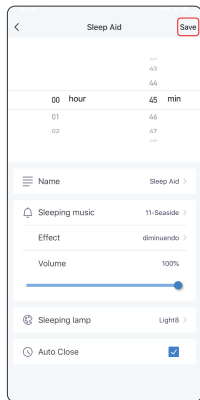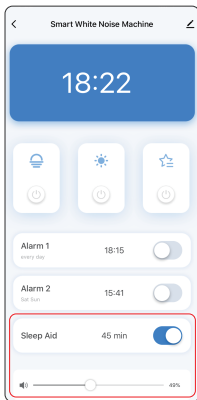

* Change the name: The APP can be customized

8. Other Settings

Click "⌵" in the upper right corner to enter, on this screen you can view device information. Third party control guidelines, offline Wake up, remove the device and so on.

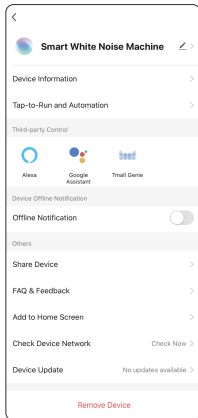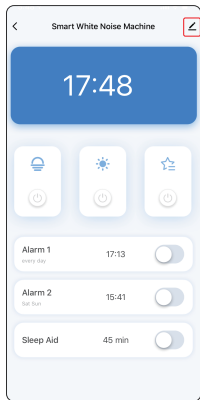




* Change the name: The APP can be customized

Voice Control

Take "Alexa" connecting setup as an example


Attention: Make sure machine is already linked with the HueM App

- 1 Download "Amazon Alexa" from Google Play/App Store and sign up (If you are already an Alexa user, you can just open it) ;
- 2 Choose Skills&Games, search HueM and enable HueM.

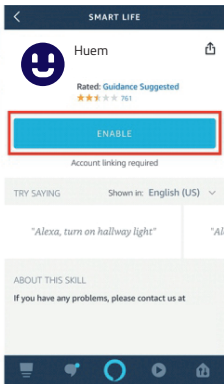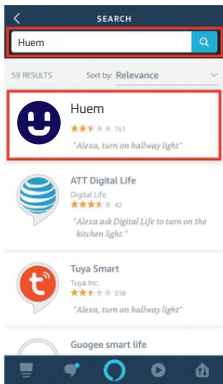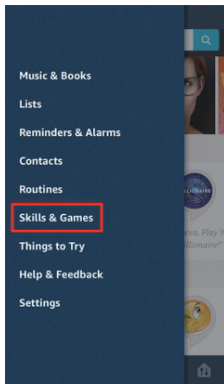






③ Log in to Alexa Huem with the same username and password you have for Huem App and tap "Authorize". You are able to voice control machine with Amazon Echo(Alexa) after seeing Huem has been successfully linked.

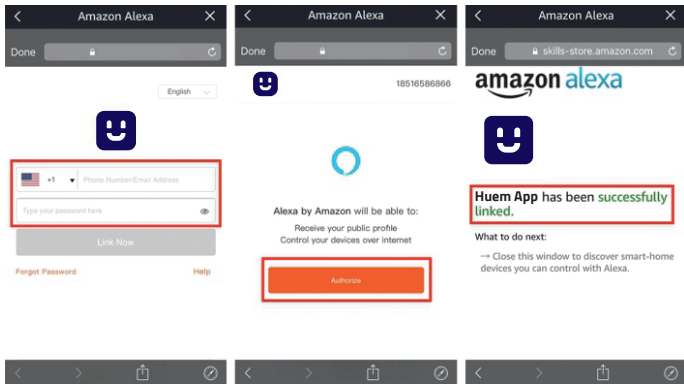



- ④ Open Huem App to check if the third-party control has linked, if it shows yes, it means the two accounts has linked up on cloud. You can rename the device with Huem App and Alexa will automatically synchronize the new name via cloud.

Attention: You can also have Alexa to discover new device and repeat the linking process to re-link with the re-named device via Huem App.(only an optional operation)

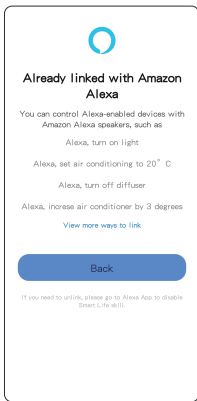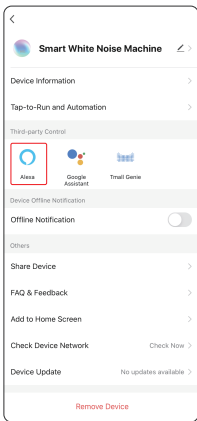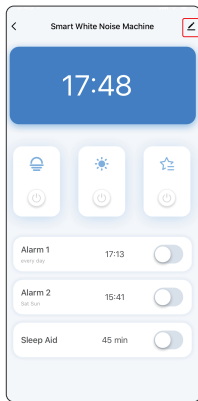

Voice control demonstration

You can re-name all the functions of machine, Alexa will sync with the new names and recognize them as voice commands.

Works with Alexa/Google smart home.

Attention: Minor delay might occur due to various Wi-Fi speed and cloud processing system, when machine or Alexa fail to react to voice control, please wait for a few minutes and try again

You can control by voice: switch the Night Light, change the brightness of the Night Light, change the color of the Light, switch the Alarm, switch the Sleep-aid.

Here are some commands to try

"Alexa, Turn on/off the Night Light"

"Alexa, Set Night Light to 20%"

"Alexa, Turn on/off the Color Light"

"Alexa, Change Color Light to red"


"Alexa, Turn on/off the Alarm"


"Alexa, Turn on/off the Sleep-aid"



Usage


Set the functions



1. Set the time and date


① Plug in to power, press and hold  to enter the time setting;






② Rotate  to change the hour, press  to apply and enter minute setting;



③ Rotate  to adjust minutes, click  to make confirmation, enter the selection of 12/24H time mode;



④ Rotate  to adjust time system, click  confirm and complete the time setting.




2. Brightness control

When the external power supply is on, click  to adjust the brightness of the time display.


- ① Support to choose 5 kinds of display brightness: 40%, 70%, 100%, OFF, 10%, ; the device light status changes with the choice of APP.
- ② The default brightness is 40% at the first boot.



40%



70%



100%




OFF




10%

Alarm Clock

1. Turn on/off alarm

① Under time-display interface, press  to turn on alarm clock. the flashing digital lights indicates the alarm time, corresponding alarm clock icon stays solid.





② After turning on the alarm clock, press  to turn off the alarm clock, corresponding alarm clock icon turns off as well.






Attention: Machine can set week-day alarms and weekend-alarms via Huem App directly.



2. Alarm setting


① Under time-display interface, press and hold  to enter alarm setting mode, alarm icon flashes;




② Rotate  to change the hour, press  to apply and enter minute setting;






③ Rotate  to change the minute, press  to complete the time setting and enter the alarm sound selecting;






④ Rotate  to select the alarm sound (S-01 to S-05 are snooze sounds) . press  to apply and complete alarm setting;





⑤ Rotate  to adjust the alarm volume level (the level of alarm volume is from U-01 to U-10), click  to make confirmation and enter the selection of lighting effect in advance;






⑥ Rotate  to set the lighting effect in advance (11 kinds of lighting effects from E-01 to E-11 are optional), click  to make confirmation and enter the light brightness settings;





Attention: After setting the alarm light mode, the selected light effect in the lamp function light mode can change the alarm light effect.

⑦ Rotate  to adjust the light brightness (8 levels of light brightness from L-01 to L-08), click  to make confirmation and enter the setting of the lighting time in advance;



⑧ Rotate  to adjust the lighting time in advance (the time is set from 005 to 120 minutes), click  to confirm and complete the alarm clock setting.








Attention: The light set by the alarm clock can be turned on in advance and long press  (3S) to turn off the light.



Snooze

(gives you multiple 9-minute naps before completely waking up)




Activate/deactivate snooze mode


① During the alarm beeping, press  /  to enter snooze mode (alarm sound pause for 9 minutes), light digits flash. You can enter snooze mode repeatedly up to 5 times;



② Under snooze mode, press the corresponding alarm clock  /  /  to exit;



* You can also gently push down/ set upright the device during the snooze to switch on snooze mode.

* During the alarm beeping, press  /  /  to stop.


③ Double-press  to shut down the alarm completely.






Attention: The alarm gets automatically shut down completely after 30 minutes of beeping without any operation on machine


Sleep-aid mode

1. Activate/deactivate sleep-aid mode


① Under time-display interface, press  to turn on sleep-aid, the preset duration of sleep-aid mode off-timer will be displayed for 3 seconds with sleep-aid icon stay solid;






② Press  /  to deactivate sleep-aid mode, with sleep-aid icon turns off.






2. Sleep-aid settings


① Under time-display interface, press and hold  to enter sleep-aid setting mode, sleep-aid icon flashes.






② Rotate  to select sleep-aid sound (S-01 to S-11 are sleep-aid white noise simulating great nature sounds), press  to apply and enter light brightness control;





③ Rotate  to set the sleep-aiding volume level (the level of sleep-aiding volume is from U-01 to U-10), click  key to make confirmation and enter the selection of sleep-aiding light effect;






④ Rotate  to set the sleep-aiding light effect (10 kinds of light effects from E-01 to E-10 are optional), click the  key to make confirmation and enter the light brightness settings;




Attention: after setting the sleep aid light mode, the selected light effect in the light function mode can change the sleep aid light effect.



⑤ Rotate  to adjust the light brightness. (8 levels of light brightness are from L-01 to L-08), click  to make confirmation and enter the setting of light sleep-aiding time;





⑥ Rotate  to adjust the sleep-aid mode duration (from 5 to 120 minutes, 30 minutes by default), press  to apply and activate sleep-aid mode.



Volume adjustment function


When the alarm or sleep-aiding sound rings, click  to turn on the volume adjustment function, and rotate  to adjust the volume level.


Attention: When the alarm or sleep-aiding sound rings, you can rotate  to adjust the preset light brightness.





Color light function


1. Turn the color light on / off

① When the external power supply is on, click  (The default brightness is at the level of 8)





② When the light is on, long press  for 3 seconds to turn off the color light.





Attention: When the color light is on, click  to adjust the brightness of the time display or turn off the time display.

2. Brightness adjustment

① When the light is on, rotate  clockwise to turn it up.




② When the light is on, rotate  anticlockwise to turn it down.





3. Light effect switching

Lighting effect switching operation, see the figure below for details.


When the light is on, take light effect switching operations of Type ① and Type ② as example:


Click : Click to jump from Type ① to Type ②.


Double-click : Assuming that the device is in the case of the light effect of Type ①, double-click  to circularly switch the light effects in Type ①.

* Custom colors in ① can be set in APP. Please refer to APP function introduction-Lantern Mode

Attention: This product has a memory function, and each change on light effect will be used as the default light effect later.

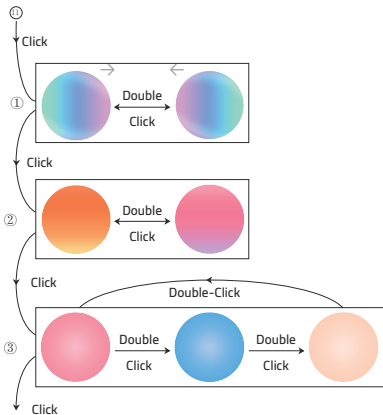

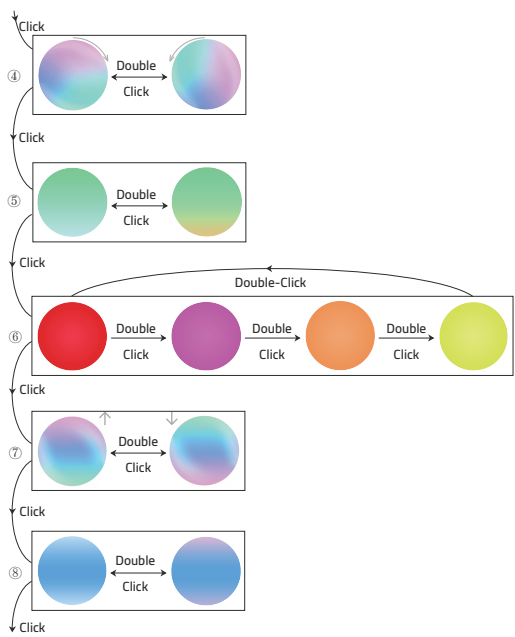

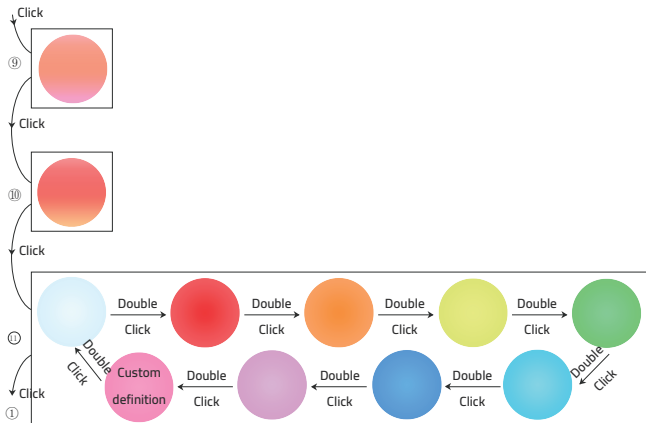







Specifications

Model	MS-BL005-02
Item Code	MS-WU102-W-RGB
Material	PC,ABS,Metal
Color	White
Size	180*180*90.3mm
Weight	556g
Adaptor	5V-2A
Power	10W(MAX)

Input	100-240V
Communication Mode	WiFi 2.4Ghz & Bluetooth
Packing List	Smart white noise machine, Use guide, Adapter (optional), charging cable (optional)
Certification	    
Speaker	4Ω 2W
Control mode	Button control, APP control and Voice control

FAQ

1. The device cannot be connected?

- ① Please put the router, equipment and mobile phone in the same area; please be as close as possible.
- ② Please make sure that the Wi-Fi signal in your area is normal. (only 2.4G Wi-Fi network is supported)
- ③ Please press  for a long time to re-enter the distribution network mode and try to connect to the distribution network again.

2. APP can't control the device suddenly?

It could be the network or the device is offline.

- ① Please make sure that the device is powered on.
- ② Please make sure that the connected Wi-Fi signal is normal (only 2.4G Wi-Fi network is supported). It is recommended that you keep the APP on for about 3 minutes to see if the device is still online.
- ③ If you are still online, please place your phone next to the device, then connect to the same Wi-Fi, as the device and try to open the web page to see if it is smooth to determine the condition of the network.
- ④ Exit the application in the background of the phone, then open the application again, and then try again.

3. How to reset Wi-Fi?

When the light is turned off and connected to the power supply, press the button for a long time until the device blinks.


4. The device status cannot be synchronized with the display status on the APP?

- ① Please make sure that the device is connected to the Internet
- ② After operating the device using APP, check to see if the device status is synchronized with the display status on the APP.

5. After the device is connected to the Internet, it can be controlled in the same location, but the mobile phone can not be remotely controlled by another address or other network.

- ① Please make sure that the device is connected to the Internet.
- ② After operating the device using APP, check to see if the device status is synchronized with the display status on the APP.

6. Others


If the device is correctly connected to the network and the above problems still occur, please enter the main page of the device APP, click "" in the upper right corner, enter the "FAQ and feedback" page, click "Continue to feedback", enter the problem you encountered and submit it.

Notes

- Please wipe this product with a soft cloth.
- Do not scrub this product with abrasive cleaning agents, rough chemicals, alcohol, acetone cleaning agents, etc., so as not to damage the surface of the product.
- Store the product in a safe, dry place that will not be overstocked, bruised or damaged.
- Do not wrap the power cord around the appliance when storing the product.
- Please use the included power adapter (5V-2A) to avoid damage to the equipment.
- Please use this product correctly according to the instructions. Disassembly and collision of this product are strictly prohibited.
- Please place the product on a stable horizontal surface and a non-smooth surface.
- Do not use it in high temperature, humidity or corrosive environment, so as to avoid leakage caused by circuit damage.
- Please take good care of it and don't let children use electrical equipment as toys to avoid accidents.
- This product is not fireproof, please do not throw it into the fire, do not go near the source of fire.
- This product is not waterproof, please do not put it into the water, so as not to damage the equipment.

hvem

CONTACT

 800 430 0030

 059 404 9274