


HV-AL101

LED line light




SMD		220V 240V	50Hz 60Hz	CCT 3000k 4000k 6000k	G13	IP20	ta 40°C	Max 40°C Min 0°C	CRI > 80	Life time 30,000h	Beam angle 270°	PF 0.6
-----	--	--------------	--------------	--------------------------------	-----	------	------------	---------------------------	-------------	-------------------------	-----------------------	-----------

Specifications	P (W)	lm/w	Output (lm)	IP	A	B	kg
HV-AL101-10 0.6M	10	106.7	1067	IP 20	603mm	28mm	0.2
HV-AL101-20 1.2M	20	108.3	2166	IP 20	1212mm	28mm	0.4

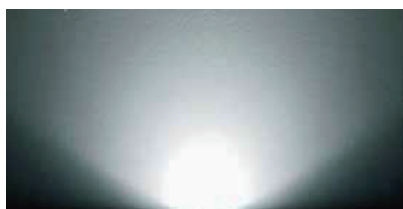

White [5700-6500K]

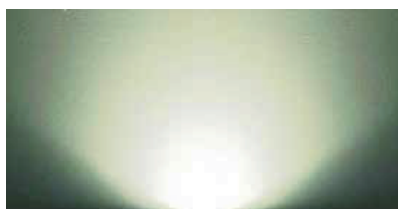


Natural White [4000-5000K]




Warm [2800-3400K]


Dimensions in mm

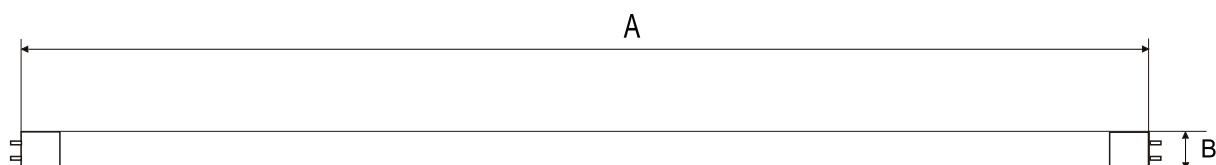

Luminous Intensity Distribution Curve

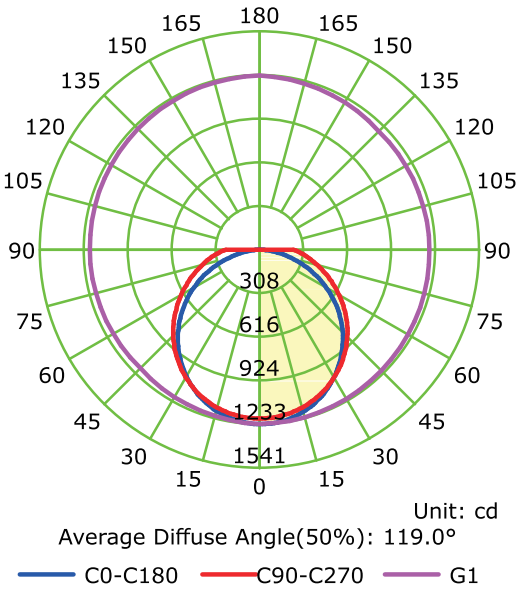

Illuminance at a Distance





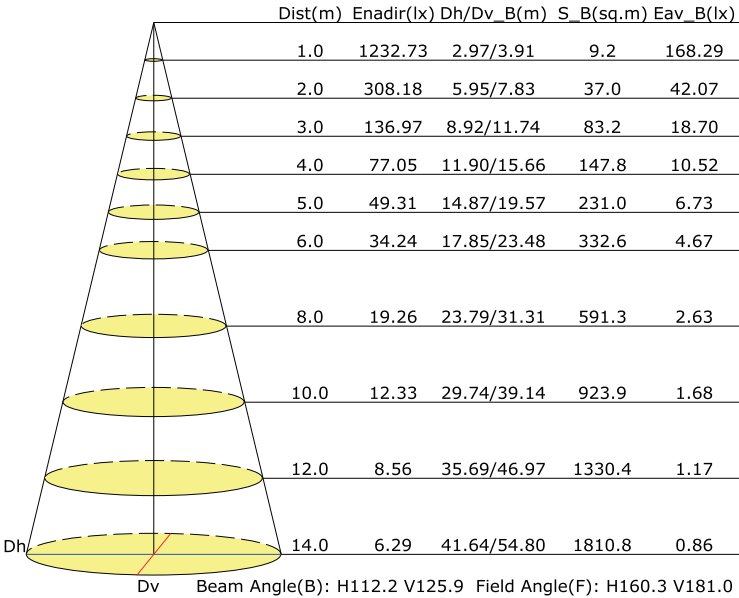



Description:
LED LINE LIGHT

Main material:
aluminum+PC cover
engineering plastic High quality aluminum
spherical reflector for soft and comfortable
light.


Specification:
Energy saving, up to 85% energy saving
comparing to standard halogen and
incandescent lamps
Long life, up to 50,000 hours
High quality light, high color
rendering, less heat, no UV or IR radiation
Build-in LED driver

Applications
Shopping mall
Office buildings, exhibition hall
and corridor

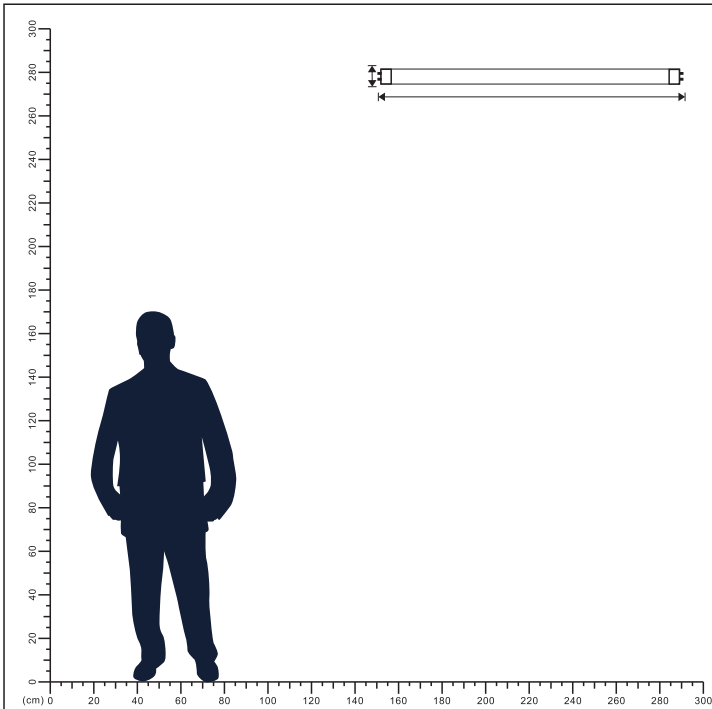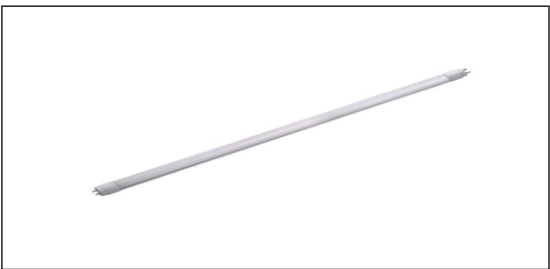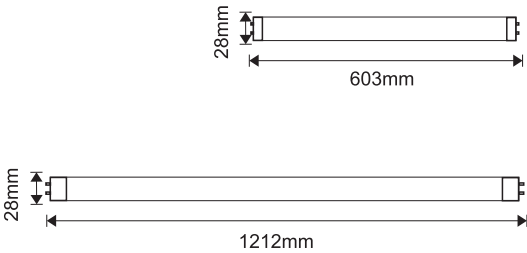


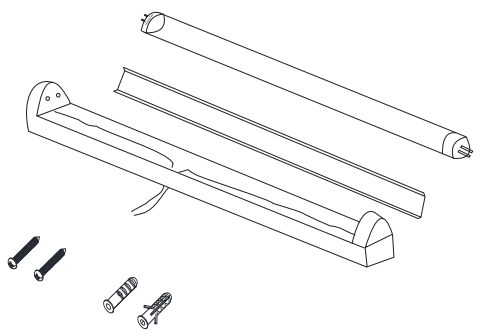


1a





1b

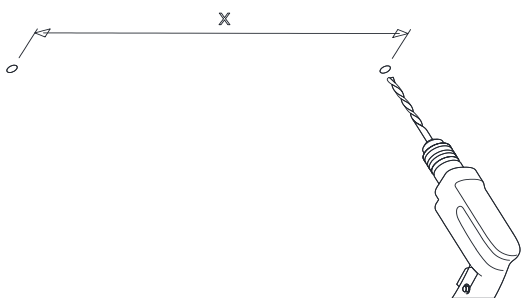


2

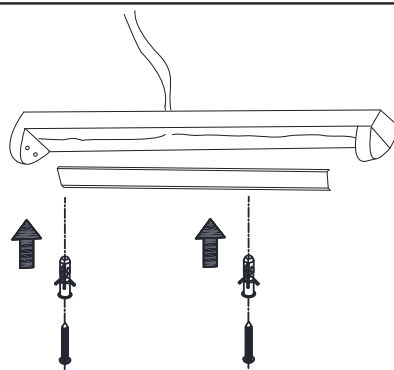


3

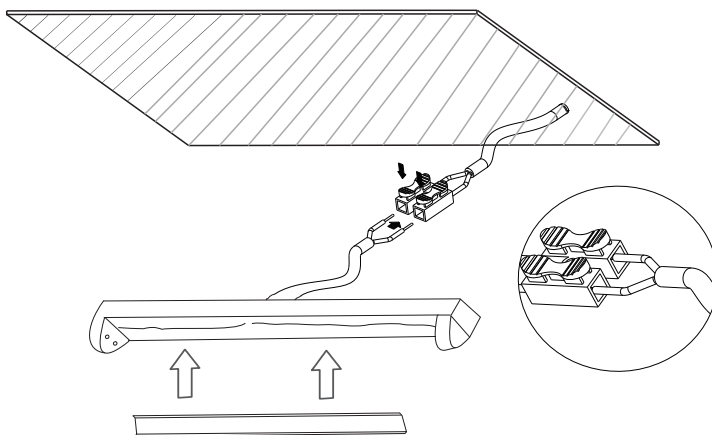

4

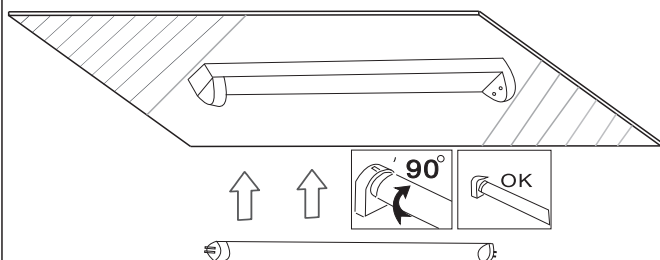

5



6