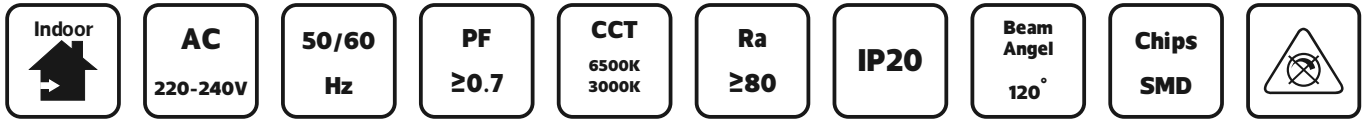
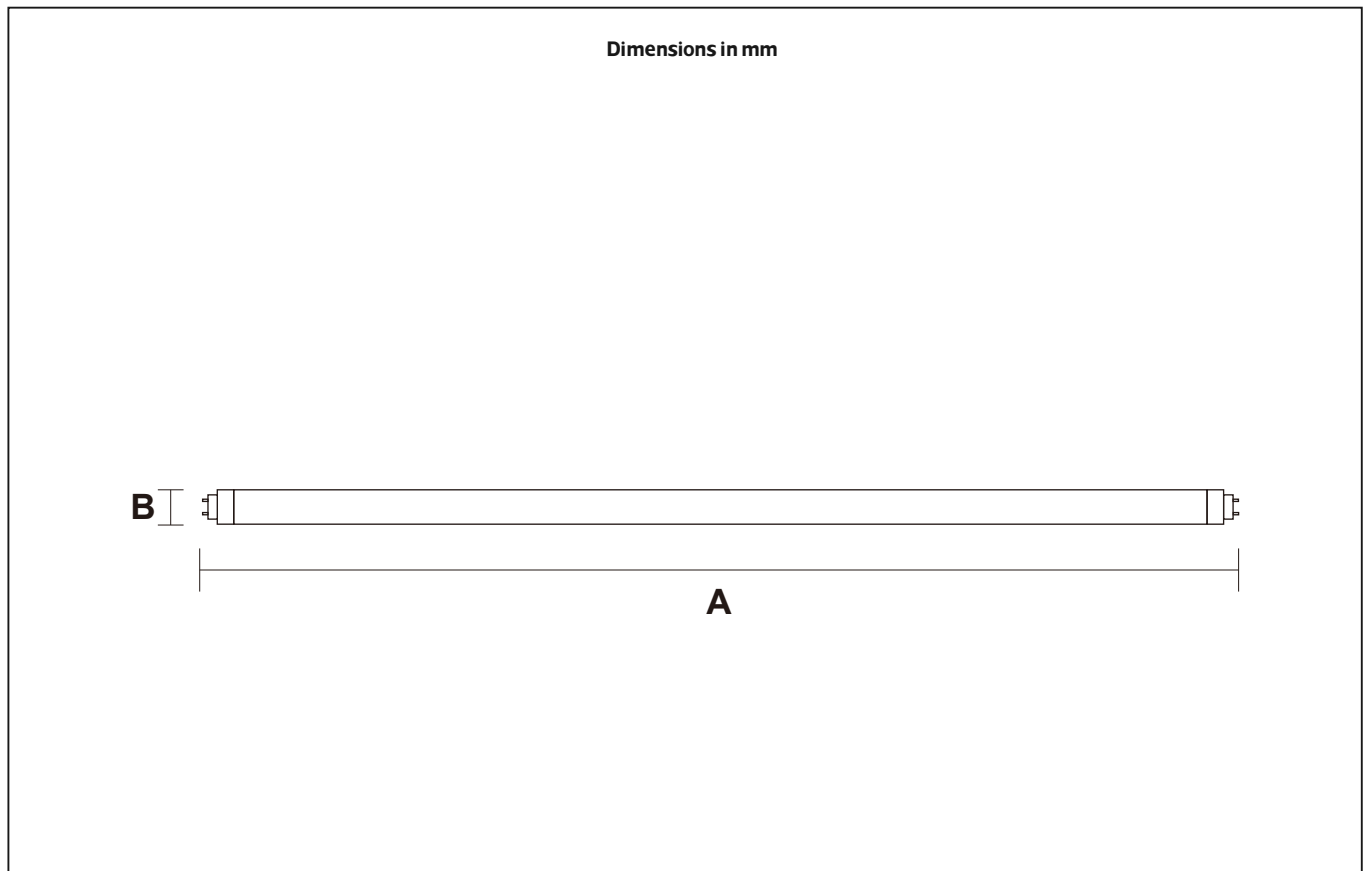


HV-T8 Series

T8 LED Line Light



Item Code	P (W)	CCT(K)	Beam angle	Output (lm)	lm/w	Dimensions in mm		kg
						A	B	
HV-T8-60-10	10	3000/6500	120°	1067	106.7	600	28	0.1
HV-T8-120-20	20	3000/6500	120°	2166	108.3	1200	28	0.2



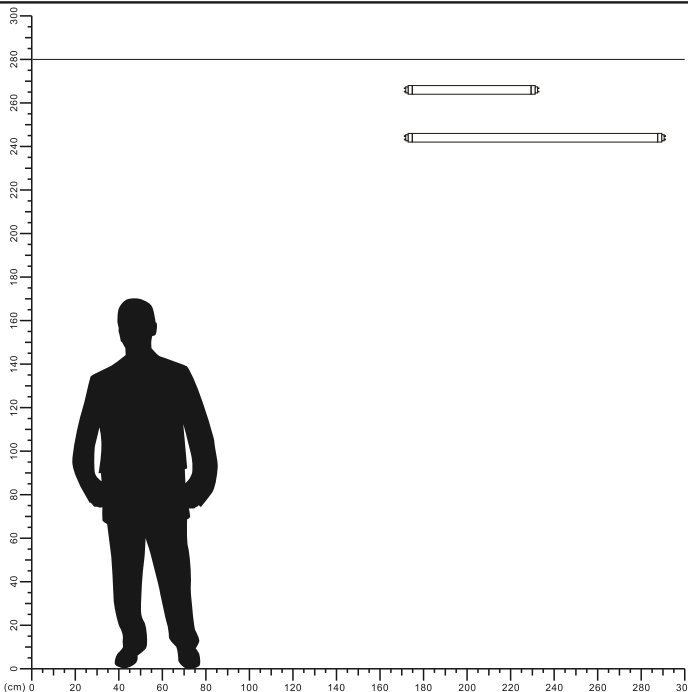



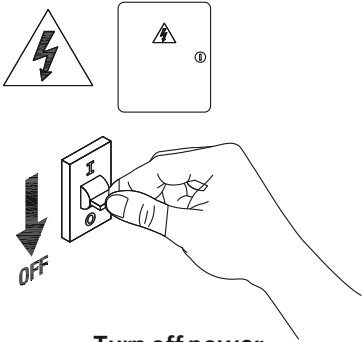

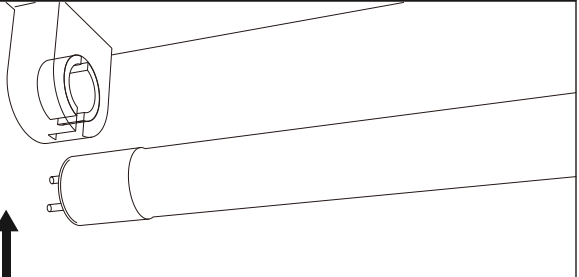
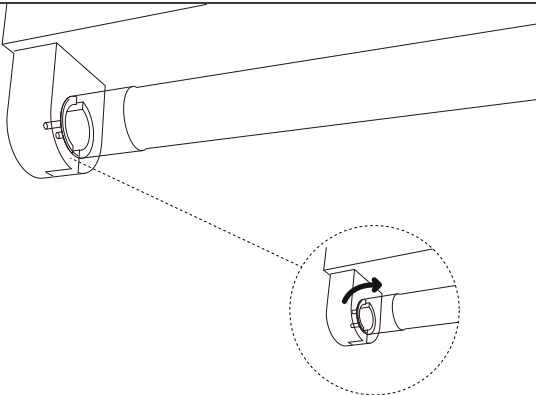
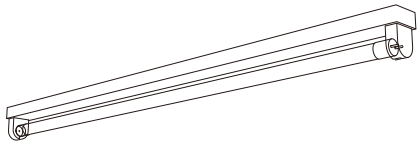
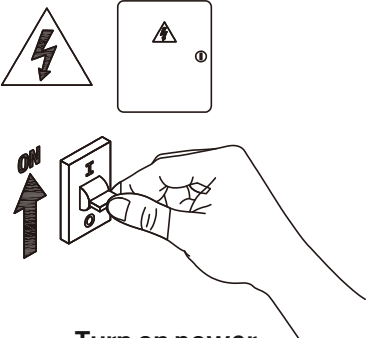

Description
T8 LED Line Light

Main material
Engineering plastics

Specification
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rendering, less heat, no UV or IR radiation LED driver is included
IP20

Applications
.Office
.Lab
.Meeting room



 <p>1</p>	 <p>2 Turn off power</p>
 <p>3 Rotate the inner ring outward</p>	 <p>4 Place T8 in the same direction as the lamp holder and put in</p>
 <p>5 Rotate 90 degrees</p>	 <p>6 Installation completed</p>
 <p>7 Turn on power</p>	 <p>8</p>

