

LIVIA 60

DOWNLIGHT





LED ceiling surface downlight with no visible screws, suitable for outdoor and indoor installations. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV-CB certified, long-life, and efficient **G9 LED lamps included**. Insulation class II, protection rating IP55.

Lampada a soffitto senza viti a vista adatta sia ad uso esterno che interno. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con inclusa lampadina a LED G9, certificata TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.



1A9.000.Z1L

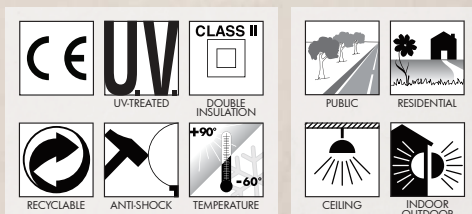



LIVIA 60 - COMPONENTS

IP55



BASE made of shockproof resin material suitable for the electrical devices fixation and provided complete with G9 lampholder.

BASE in resina antiurto predisposta per il fissaggio degli accessori elettrici e fornita completa di portalampada G9.


DIFFUSER with frosted finishing made of shockproof resin material (PC), complete with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE satinato in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Quick and easy locking system to the base without screws.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Sistema di aggancio alla base facile e veloce senza l'ausilio di viti.

LIVIA 60



Dimensions and weight

Diameter: Ø60 mm
Height: 69 mm
Weight: 0,10 Kg

Moulded colours:

Black White Grey

Diffuser PC:

Frosted

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

G9 LED

100 - 240 V



LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
	1,7 W	150 Lm	4000 K	.Z1L
			3000 K	.Z1R

Ceiling surface downlight supplied with TÜV-CB certified, long-life and efficient **G9 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** G9 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **100-240V:** wide voltage range to protect the driver from power surges.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

LIVIA 90

DOWNLIGHT



LED ceiling surface downlight with no visible screws, suitable for outdoor and indoor installations. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV-CB certified, long-life, efficient and Kelvin settable GU10 LED lamps included. Insulation class II, protection rating IP 55.

Lampada a soffitto senza viti a vista adatta sia ad uso esterno che interno. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Completa di lampadine a LED GU10 con Kelvin impostabile, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.



2A9.000.L1K


CCT SETTABLE

2700 K 4000 K

SDCM <3

RECYCLABLE	ANTI-SHOCK	TEMPERATURE	CEILING	INDOOR OUTDOOR





LIVIA 90 - COMPONENTS

IP55



BASE made of shockproof resin material suitable for the electrical devices fixation and provided complete with GU10 lampholder.

BASE in resina antiurto predisposta per il fissaggio degli accessori elettrici e fornita completa di portalamпада GU10.

DIFFUSER with frosted finishing made of shockproof resin material (PC), complete with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE satinato in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Quick and easy locking system to the base without screws.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Sistema di aggancio alla base facile e veloce senza l'ausilio di viti.

LIVIA 90



Dimensions and weight

Diameter: Ø96 mm
Height: 105 mm
Weight: 0,26 Kg

Moulded colours:

Black White Grey

Diffuser PC:

Frosted

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GU10 LED

100 - 240 V



LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	3,5W	366Lm	4000 K	.U1K
			2700 K	
	6W	615 Lm	4000 K	.L1K
			2700 K	

Ceiling surface downlight supplied with TÜV-CB certified, long-life and efficient Kelvin settable GU10 LED lamp included. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GU10 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

3.5W = 35W HALOGEN
366 Lm
SAVE 90%

6W = 50W HALOGEN
615 Lm
SAVE 88%

CCT SETTABLE LED LAMP



CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

LIVIA 160

DOWNLIGHT



LED ceiling surface downlight with no visible screws, suitable for outdoor and indoor installations. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included. Insulation class II, protection rating IP55.

Lampada a soffitto senza viti a vista adatta sia ad uso esterno che interno. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Completa di lampadine a LED GX53 con Kelvin impostabile, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.




3A9.000.D1K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6

MADE IN ITALY



LIVIA 160 - COMPONENTS

IP55



BASE made of shockproof resin material suitable for the electrical devices fixation and provided complete with GX53 lampholder.


BASE in resina antiurto predisposta per il fissaggio degli accessori elettrici e fornita completa di portalampada GX53.

DIFFUSER with frosted finishing made of shockproof resin material (PC), complete with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE satinato in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Quick and easy locking system to the base without screws.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Sistema di aggancio alla base facile e veloce senza l'ausilio di viti.

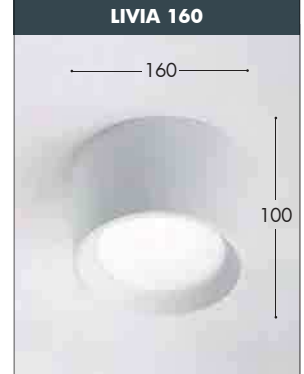

Dimensions and weight

Diameter: Ø160 mm
Height: 100 mm
Weight: 0,76 Kg

Moulded colours:

Black White Grey

Diffuser PC:

Frosted

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GX53 LED

100 - 240 V

*ADD. SUFFIX



LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
 GX53 LED	3 W	410 lm	6500 K	.G1K
			4000 K	
			3000 K	
 GX53 LED	10 W	1290 lm	6500 K	.D1K
			4000 K	
			3000 K	

Ceiling surface downlight supplied with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamp included. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.


3W = **40W** incandescent
410 Lm

SAVE 93%

10W = **100W** incandescent
1290 Lm

SAVE 90%

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

LIVIA 180

DOWNLIGHT



LED ceiling surface downlight with no visible screws, suitable for outdoor and indoor installations. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV-CB certified, long-life, efficient and Kelvin settable **E27 high power LED lamps included**. Insulation class II, protection rating IP44.

Lampada a soffitto senza viti a vista adatta sia ad uso esterno che interno. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Completa di lampadine a LED E27 ad ALTA POTENZA, con Kelvin impostabile certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP44.



4A9.000.Q1K

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION

TUV SUD


CCT SETTABLE

3000 K **4000 K**

SDCM <6

RECYCLABLE	ANTI-SHOCK	TEMPERATURE	DOUBLE INSULATION	CEILING	INDOOR/OUTDOOR





LIVIA 180 - COMPONENTS

IP44



BASE made of shockproof resin material suitable for the electrical devices fixation and provided complete with E27 lampholder. Designed to allow a correct heat dissipation.

BASE in resina antiurto predisposta per il fissaggio degli accessori elettrici e fornita completa di portalamпада E27. Progettato per permettere una corretta dissipazione del calore.


DIFFUSER with frosted finishing made of shockproof resin material (PC).

DIFFUSORE satinato in resina antiurto (PC).

COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Quick and easy locking system to the base without screws.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Sistema di aggancio alla base facile e veloce senza l'ausilio di viti.

LIVIA 180



Dimensions and weight

Diameter: Ø180 mm
Height: 200 mm
Weight: 1,10 Kg

Moulded colours:

Black White Grey

Diffuser PC:

Frosted

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

E27 HIGH POWER LED

100 - 240 V



LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
	15 W*	1690 lm	4000 K	.R1K
			3000 K	
	30 W*	3620 lm	4000 K	.Q1K
			3000 K	


Ceiling surface downlight supplied with TÜV certified, long-life, efficient and Kelvin settable E27 high power LED lamp included. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

15W 1690 Lm = 100W incandescent
SAVE 85%

30W 3620 Lm = 50W HQI-SON
SAVE 40%

CCT SETTABLE LED LAMP*








CCT switch settable in two different positions, to select the desired Kelvin temperature (3000K/4000K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

LIVIA RANGE

DOWNLIGHT

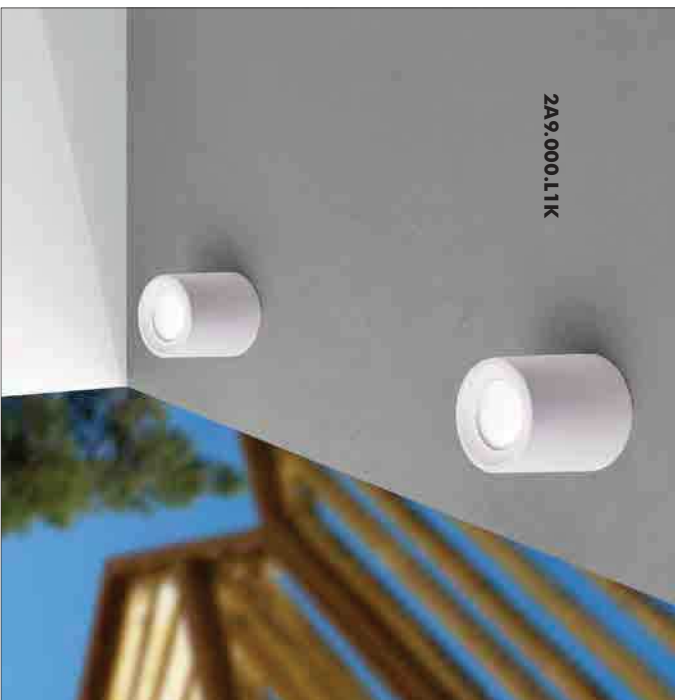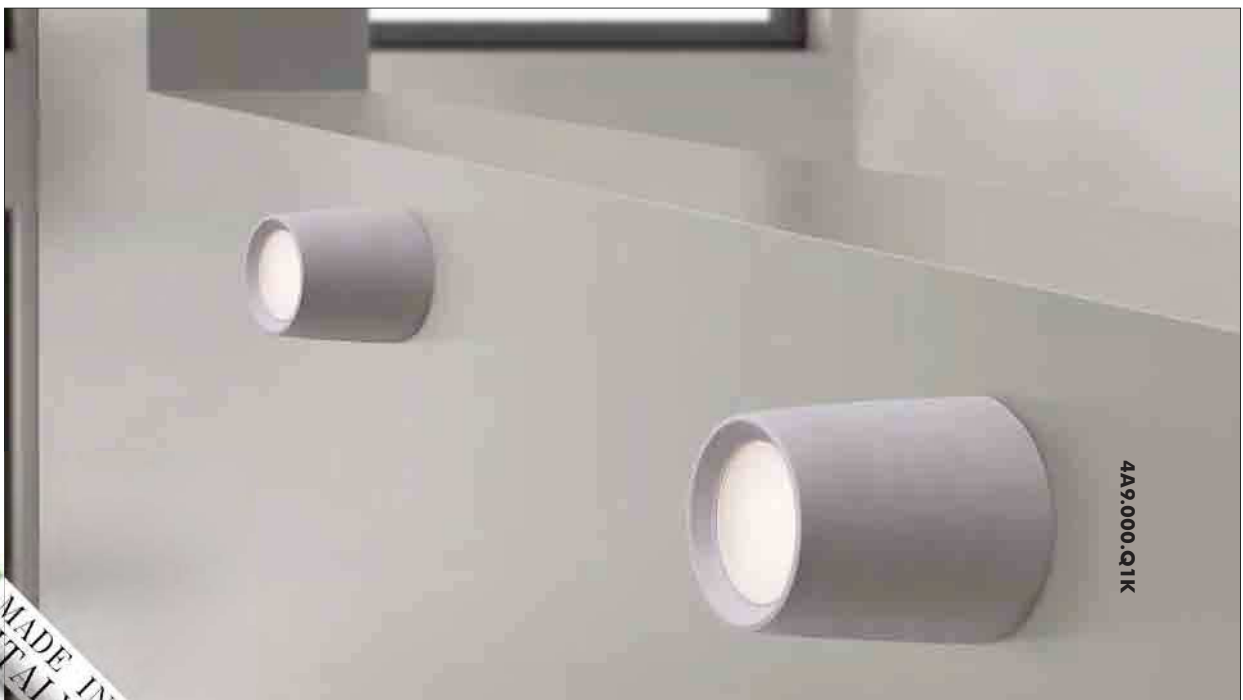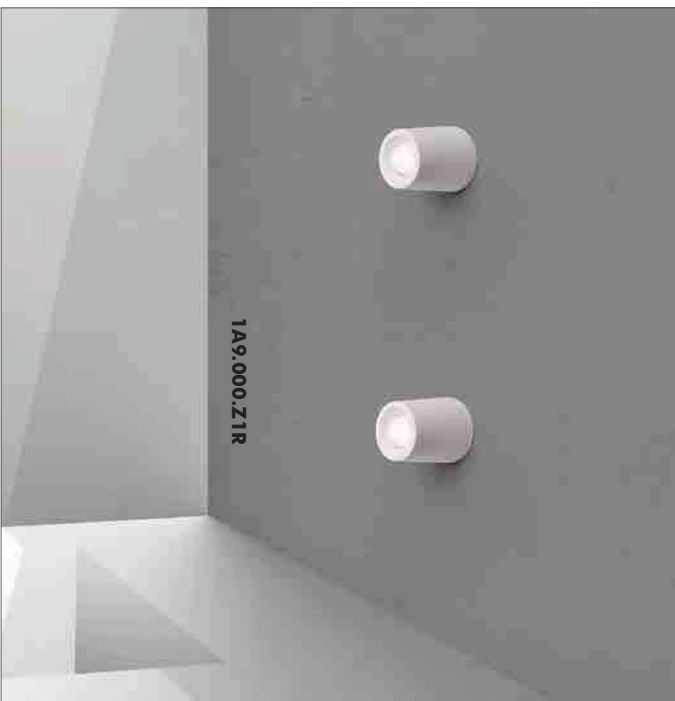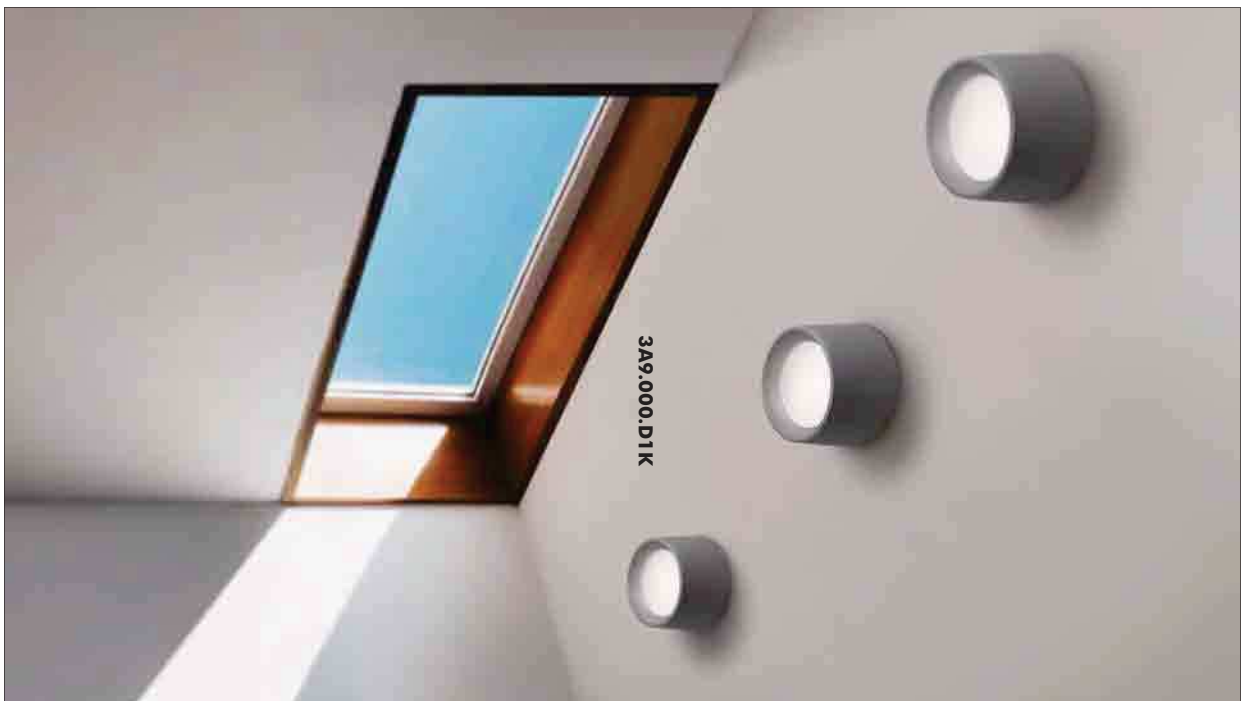



LIVIA 60

1A9.000.Z1L	1,7W	1A9.000.Z1R
4000K	G9 LED LAMP INCLUDED	3000K

Pcs 75
Kg 8,4
mc 0,057

LIVIA 90

3,5 W		2A9.000.U1K
6 W		2A9.000.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 30
Kg 12,6
mc 0,09

LIVIA 160

3W		3A9.000.G1K
10W		3A9.000.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 18
Kg 15,3
mc 0,092

LIVIA 180

15W		4A9.000.R1K
30W		4A9.000.Q1K

CCT SETTABLE E27 HIGHPOWER LED LAMP INCLUDED
3000K/4000K

Pcs 12
Kg 22,5
mc 0,147