



Ceiling Lamp





ME-ICL0105-40



IP20



Model No	P (W)	Output (lm)	lm/w	Color	kg
ME-ICL0105-40	40	2400	60	Black	2.0
ME-ICL0004-50	50	3000	60	Black	3.0
ME-ICL0002-160	160	8000	50	Black	10.8
ME-ICL0002-200	200	9000	45	Black	19.5

Dimensions in mm

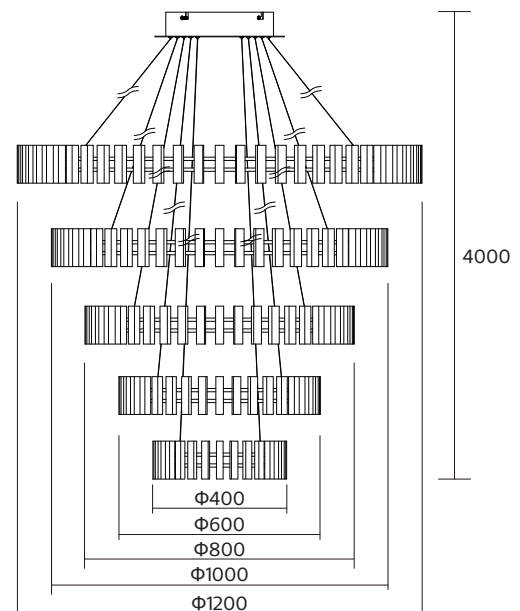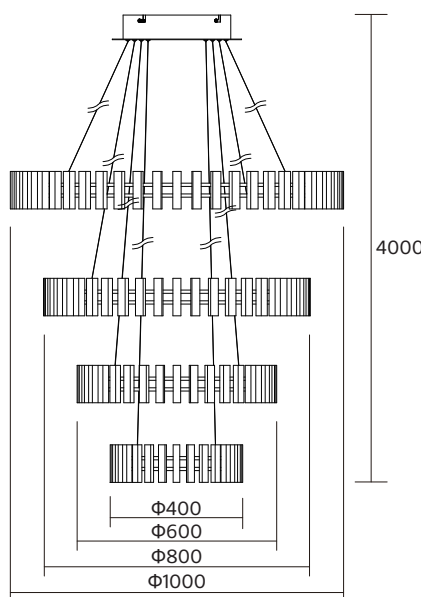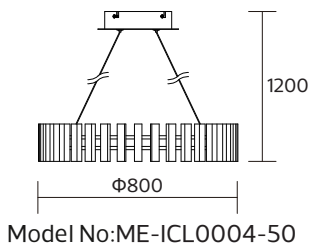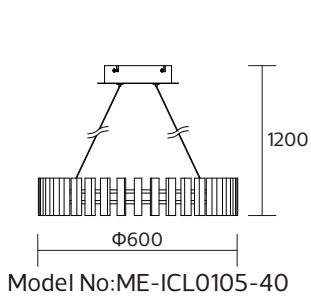

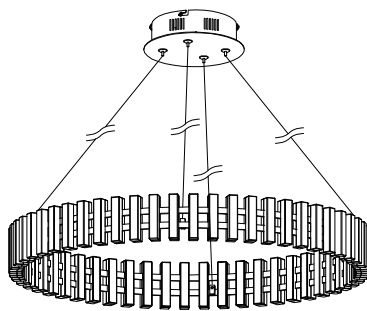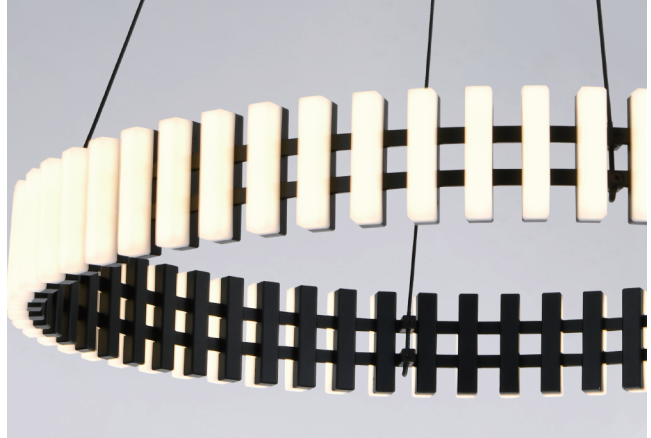

Description:

Ceiling Lamp

Main material:

Iron+PC


Specification


Iron art baking paint chassis, strong bearing capacity not easy to deform, corrosion and rust prevention, durable. The PC lampshade transmits light evenly, is not easy to break, is not easy to change color, sturdy and durable.

IP 20


Applications

- .Living room
- .Bedroom
- .Showroom

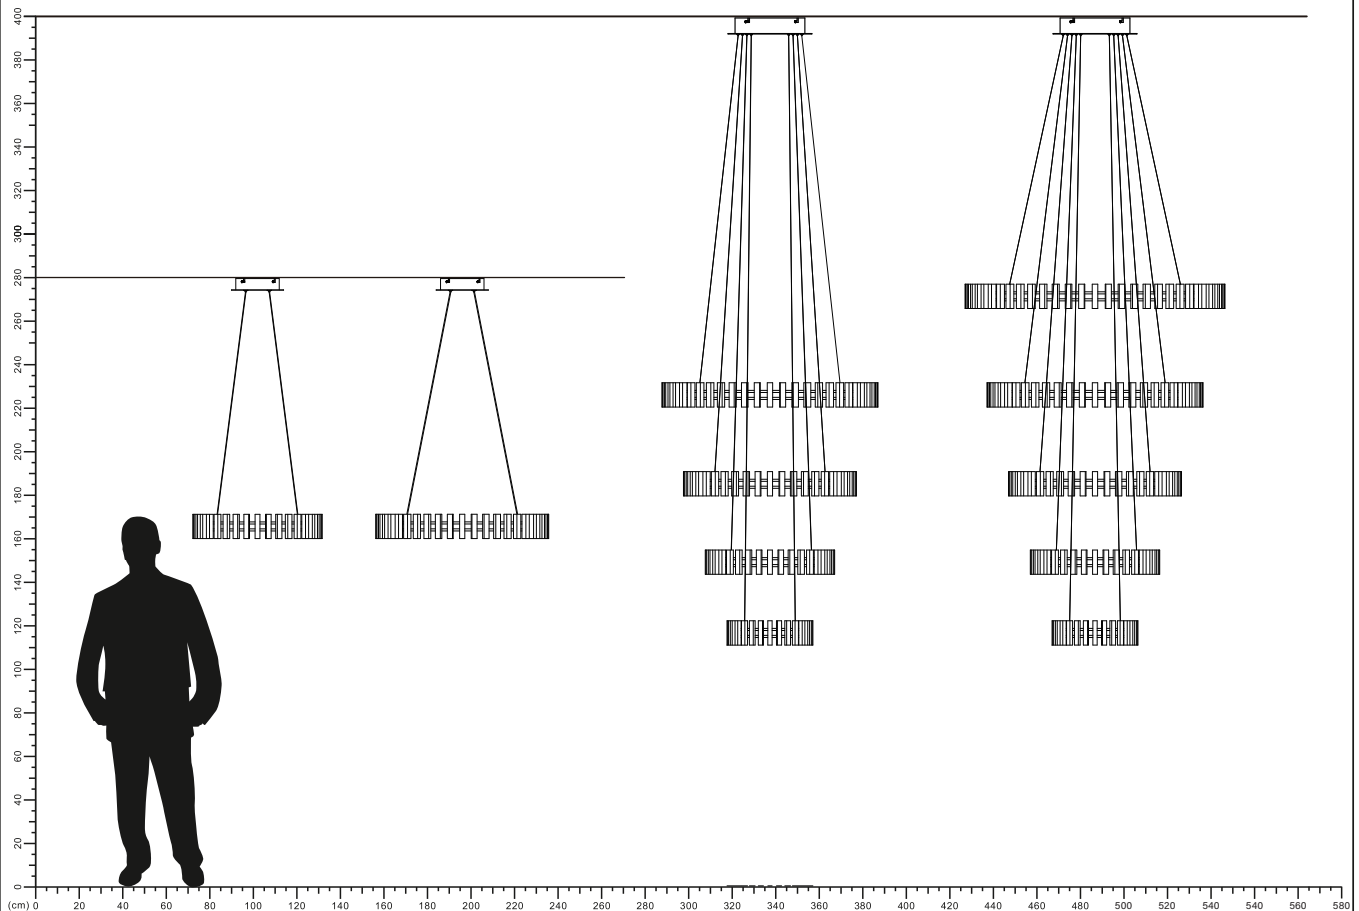


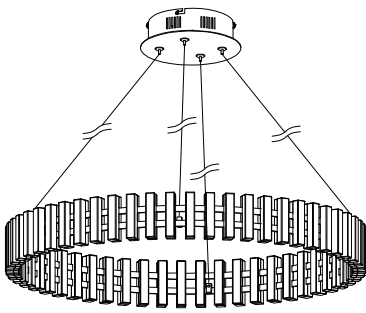

1

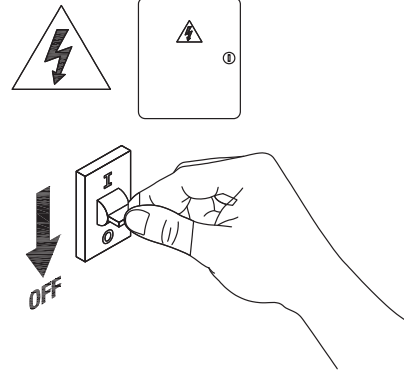


Turn off the power

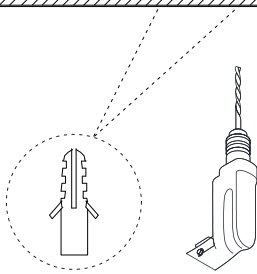


2

Drill holes in the ceiling insert expansion screws

3

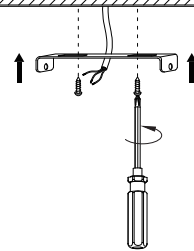


To install the hanging board

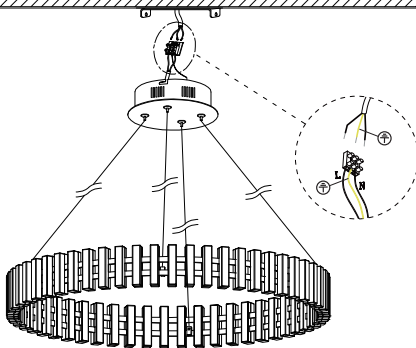


4

Connecting the power cord

5

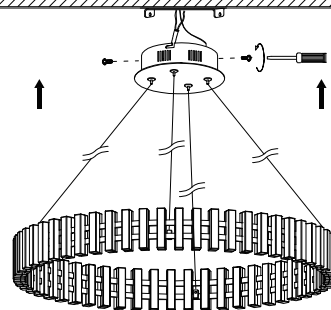


Tighten the screws fixed lamp body

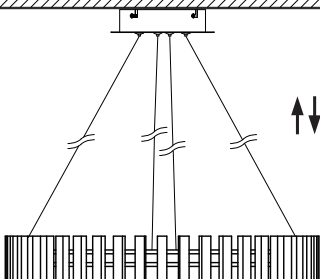

6

Adjust the cable length according to the floor height, installation completed.

7

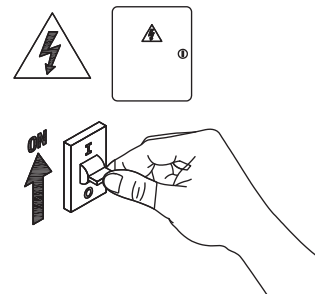

Turn on the power

