

LED CEILING LAMP


ME-ICL Series
IP20




Indoor 	AC 220-240V	50/60 Hz	PF ≥0.4	CCT 2700K	Ra ≥90	IP20	Beam Angel 50°	Chips COB	
------------	----------------	-------------	------------	--------------	-----------	------	----------------------	--------------	--

Model No	P (W)	CCT (K)	Output (lm)	lm/w	Color	Dimensions in mm				
A	B	C	D							kg
ME-ICL0401-5-27K-BK-60D	5	2700	350	70	Black	Φ25	Φ50	300	1000	0.23
ME-ICL0401-5-27K-GD-60D	5	2700	350	70	Golden	Φ25	Φ50	300	1000	0.23
ME-ICL0402-5-27K-BK-60D	5	2700	350	70	Black	Φ25	Φ50	500	1000	0.33
ME-ICL0402-5-27K-GD-60D	5	2700	350	70	Golden	Φ25	Φ50	500	1000	0.33
ME-ICL0403-5-27K-BK-60D	5	2700	350	70	Black	Φ25	Φ50	750	1000	0.36
ME-ICL0403-5-27K-GD-60D	5	2700	350	70	Golden	Φ25	Φ50	750	1000	0.36

Dimensions in mm

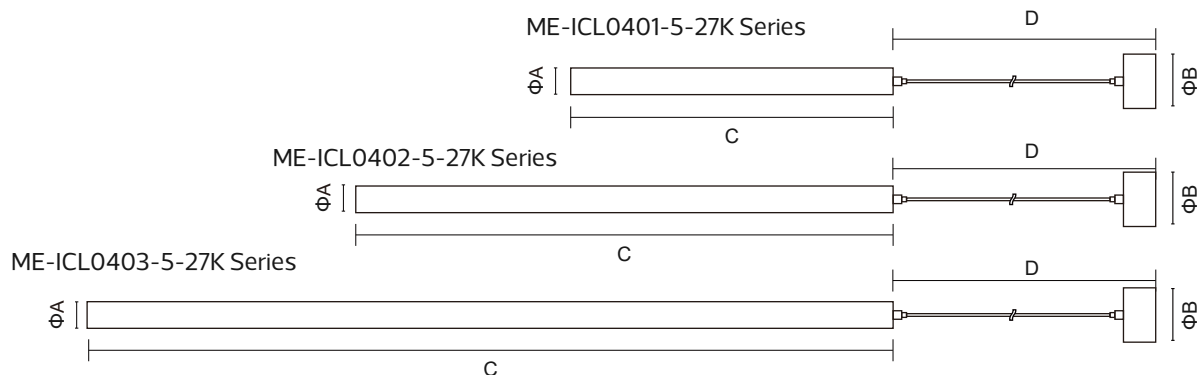

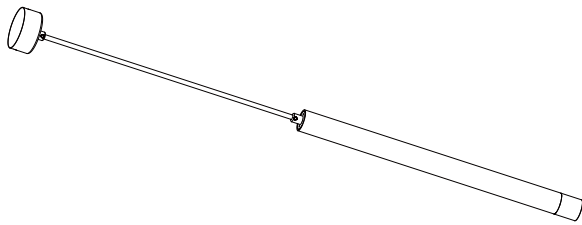


Description:
LED CEILING LAMP


Main material:
Aluminium+Engineering plastics

Specification
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rendering, less heat, no UV or IR radiation
LED driver is included
IP20

Applications
• Shopping mall
• Office buildings
• Exhibition hall

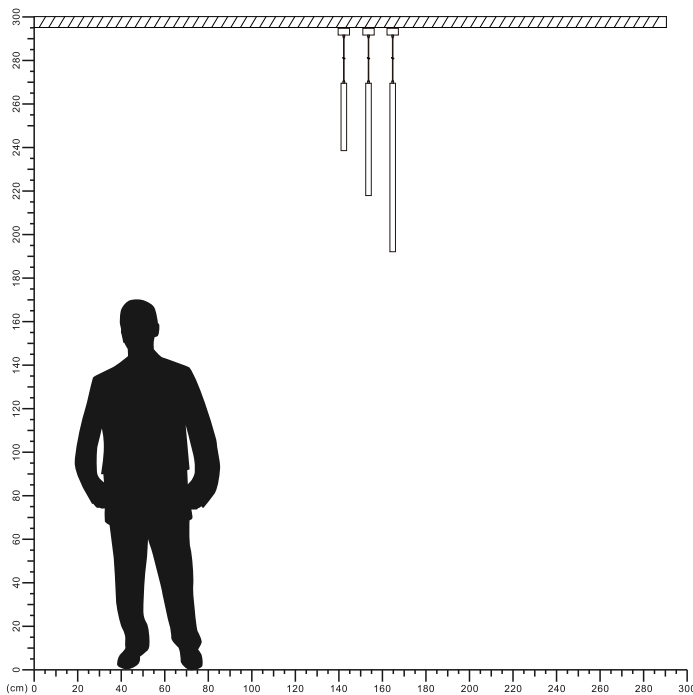


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

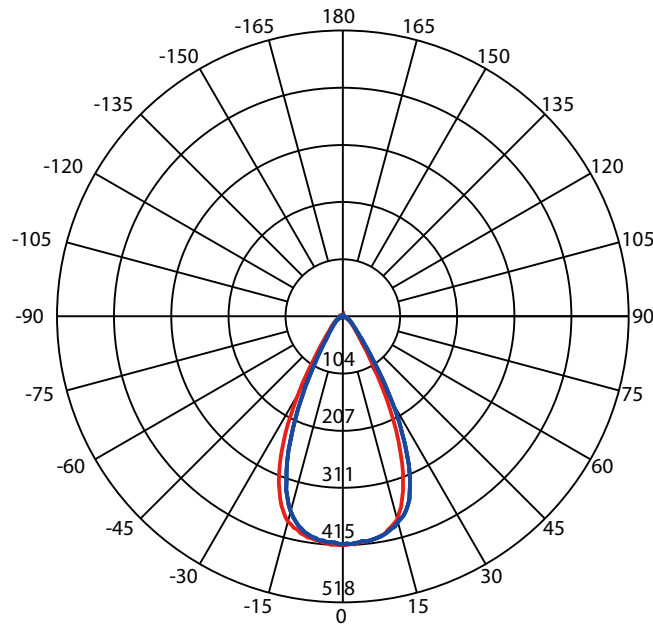


Beam Angle(50%) C0-180,C90-270: 53.6 deg,53.4 deg

C0-180 — C90-270 —


Illuminance at a Distance

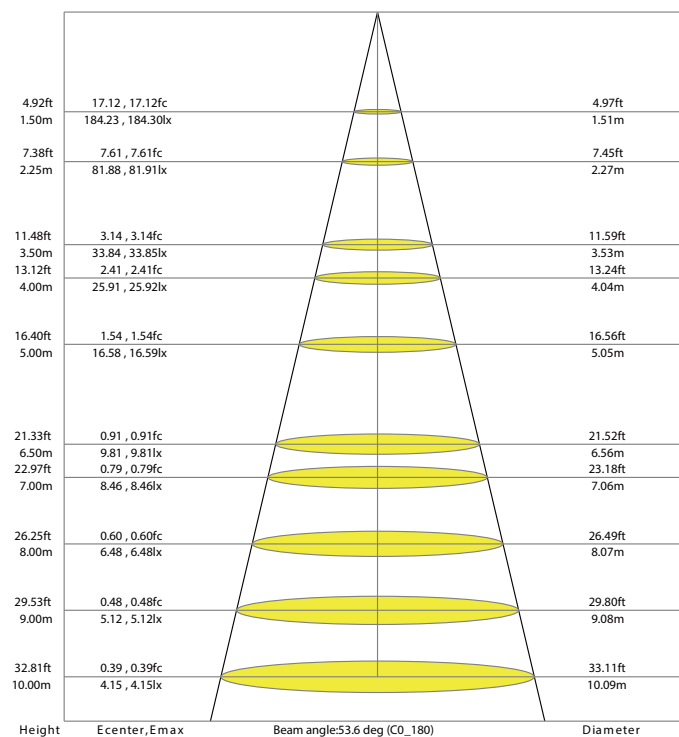

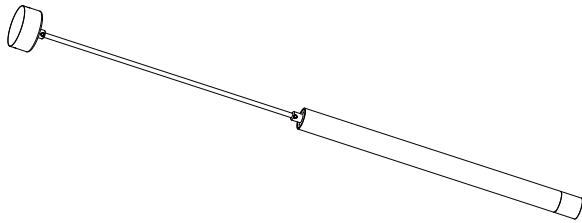


1

Turn off The Power

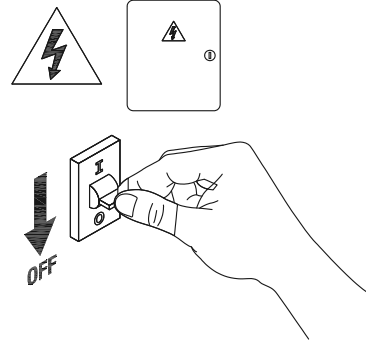


2

Drill 2 holes on your ceiling




3

Install the base




4

Connect the cable

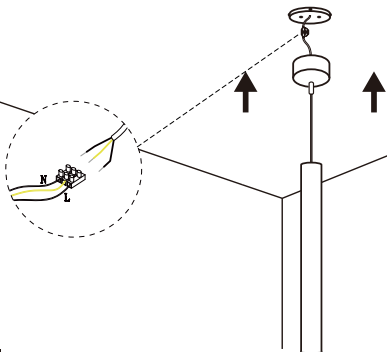

5

Insert the lamp body into the base

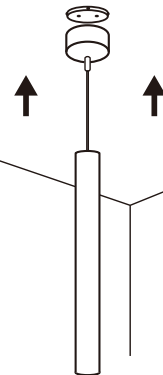

6

Installation completed



7

Turn on the power

