
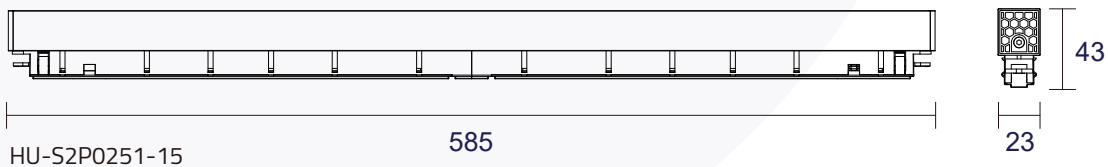
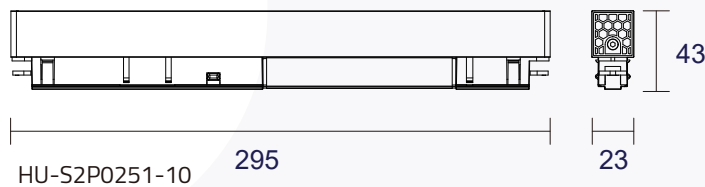



LED Smart Magnetic Track System



Model No:	Input Voltage	P(W)	CCT	Color	Using Track	Total Lumen	Beam Angle	
HU-S2P0251-10	DC48V	10	2700-6000K	Black	NR-S20/F20	680	100°	0.2
HU-S2P0251-15	DC48V	15	2700-6000K	Black	NR-S20/F20	1110	100°	0.35

Dimensions in mm



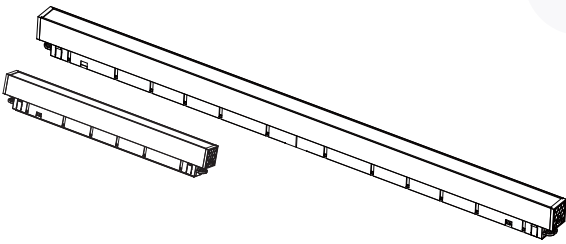


Description:
LED Smart Magnetic Track System


Main material:
Aluminum+PC

Specification:
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rendering, less heat, no UV or IR radiation
Build-in LED Driver

Applications
.Office
.Meeting room
.Sitting room

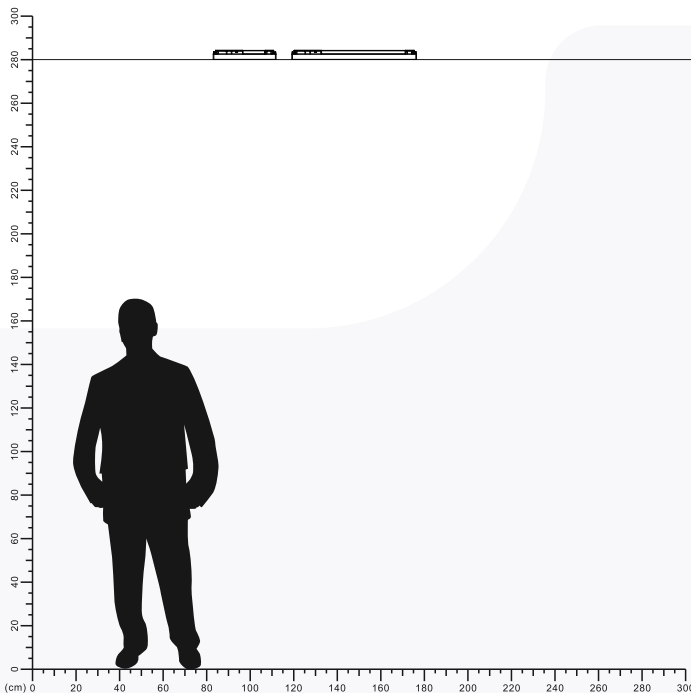


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

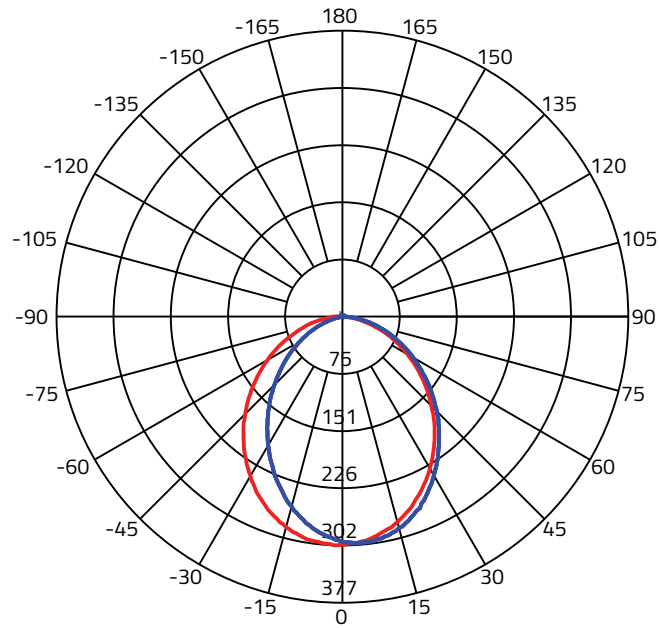


Beam Angle(50%) C0-180,C90-270: 100.2 deg,90.7 deg

C0-180 ——— C90-270 ———

Illuminance at a Distance

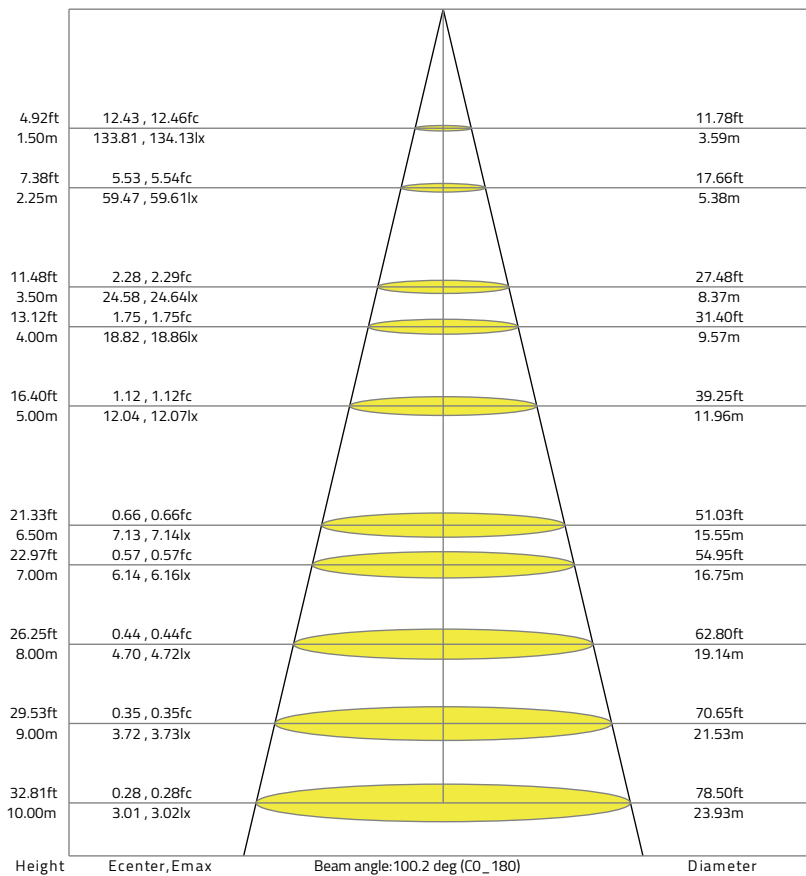


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

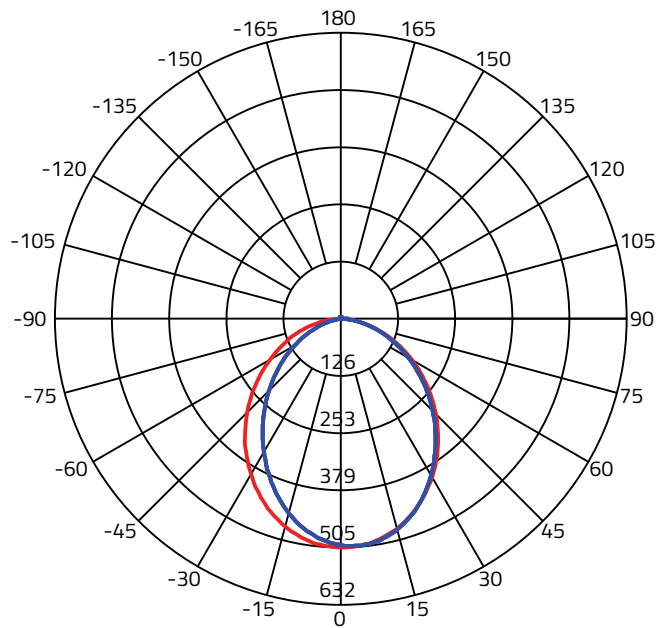


Beam Angle(50%) C0-180,C90-270: 101.1 deg,91.1 deg

C0-180 ——— C90-270 ———


Illuminance at a Distance

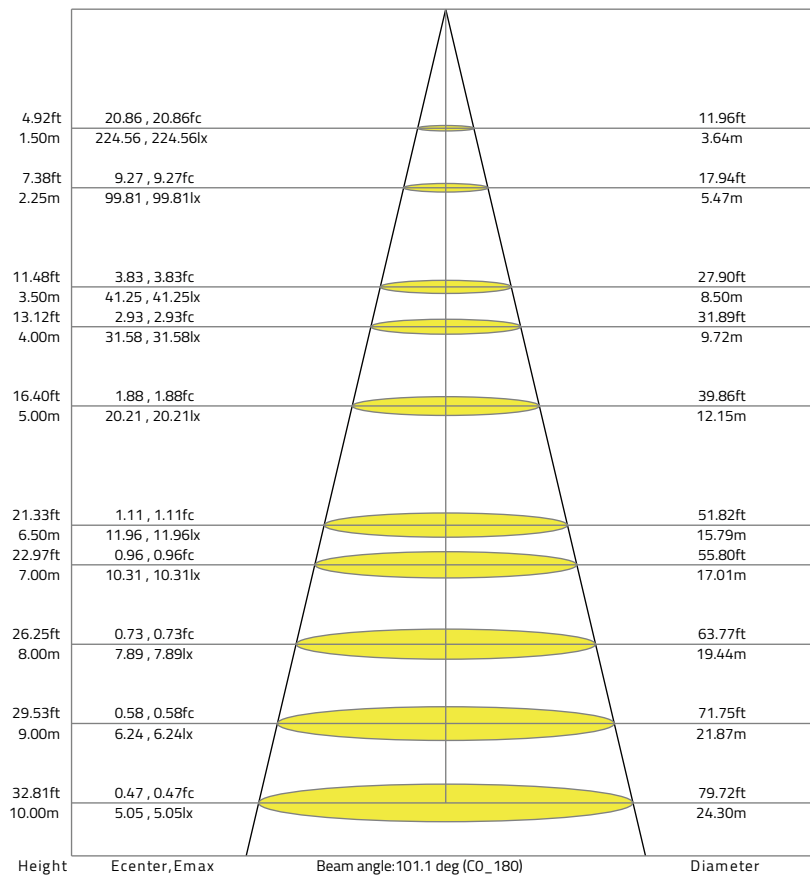

Installation drawing

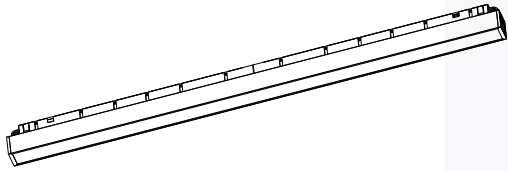


1

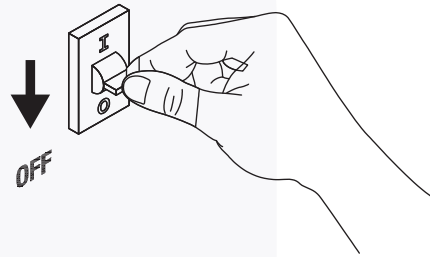


2

Turn off the power

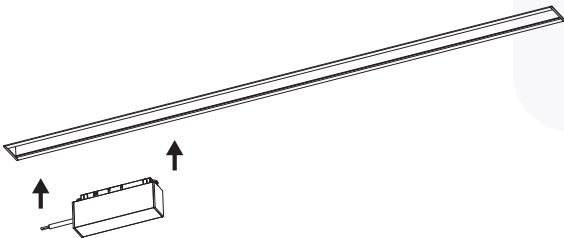


3

Install DC48V power supply

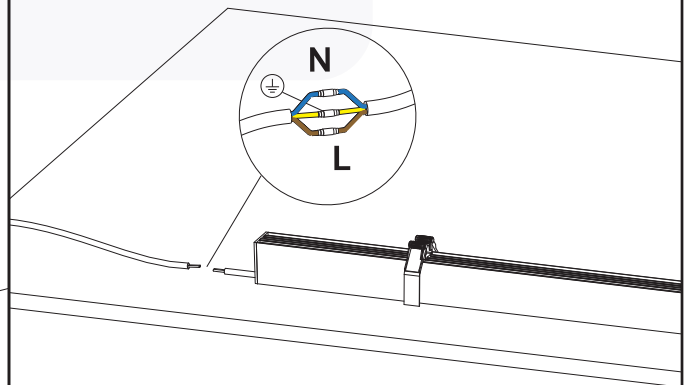

4

Connect the cable

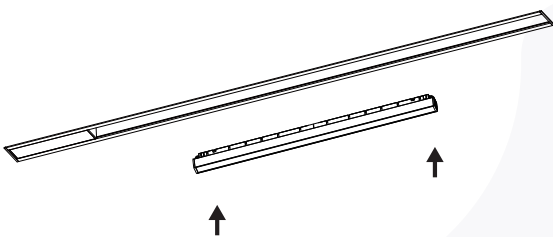

5

Install lamp



6

Installation is complete