




Crystal chandelier


ME2030B-80 ME2031B-100 ME2032B-120
IP20



Item Code	P (W)	CCT (K)	Output (lm)	lm/w	PF	Dimensions in mm					kg
						A	B	C	D	E	
ME2030B-80	25	3000	2250	90	≥0.9	800	90	1000	350	60	5.06
ME2031B-100	36	3000	3060	85	≥0.9	1000	90	1000	500	60	6.53
ME2032B-120	45	3000	3825	85	≥0.9	1200	90	1000	500	60	7.9

Dimensions in mm

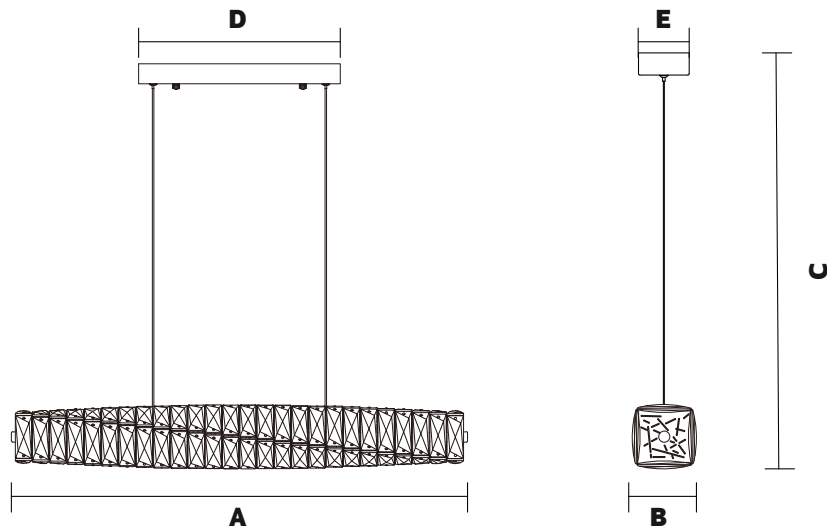


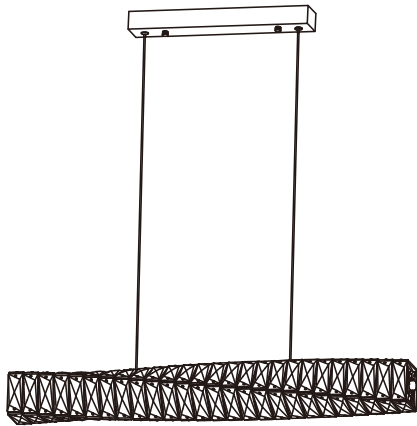




Description:
Crystal chandelier

Main material:
Aluminum+Crystal

Specification
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps High quality light, high color rendering, less heat, no UV or IR radiation LED driver is included IP20



Applications
. Hotel
. Drawing room
. Dar

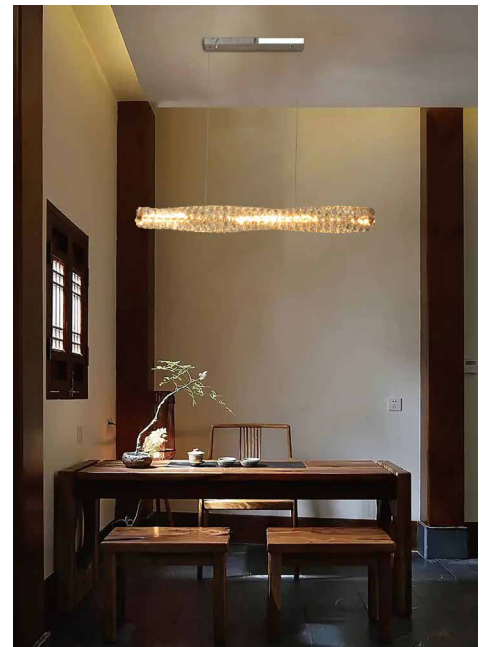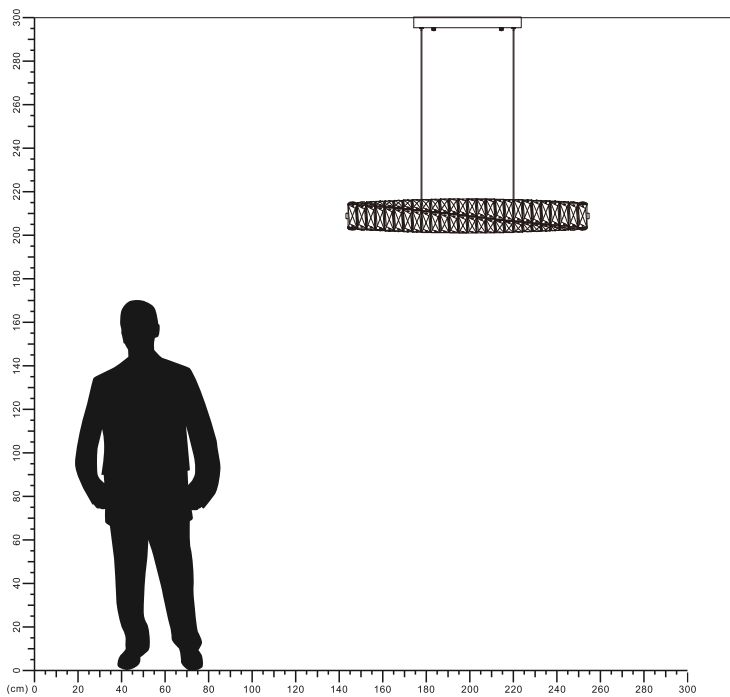

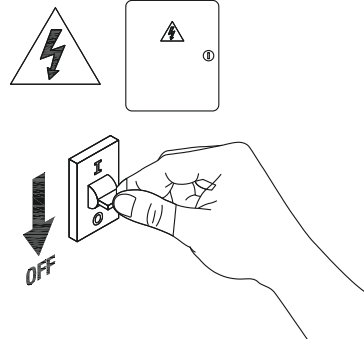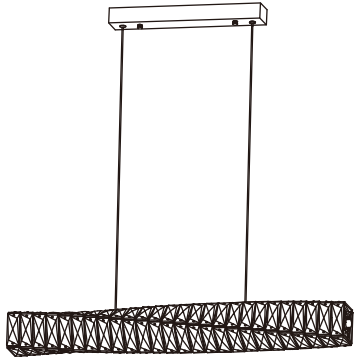

1

Turn off The Power

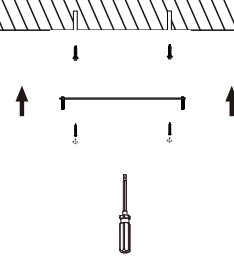



2

Drill 2 holes on your ceiling

3

Install base plate

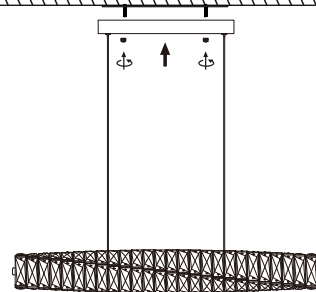
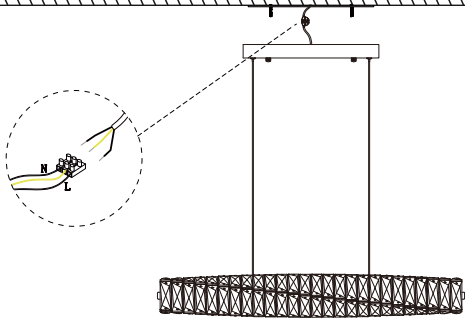


4

connect the cable

5

Install the ceiling lamp on the base plate

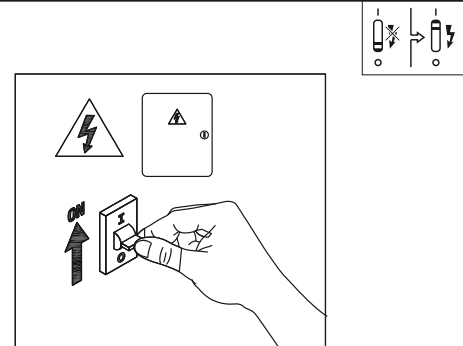

6

Installation completed

7

Turn on the power

