


LED Magnetic track system

NR-S20 NR-S35 IP20






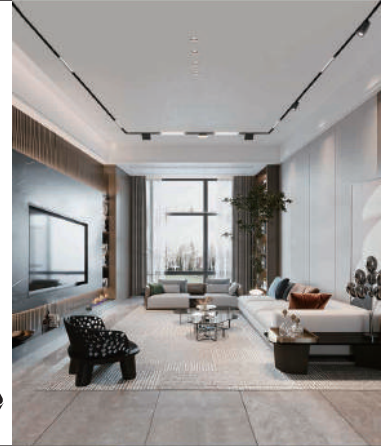





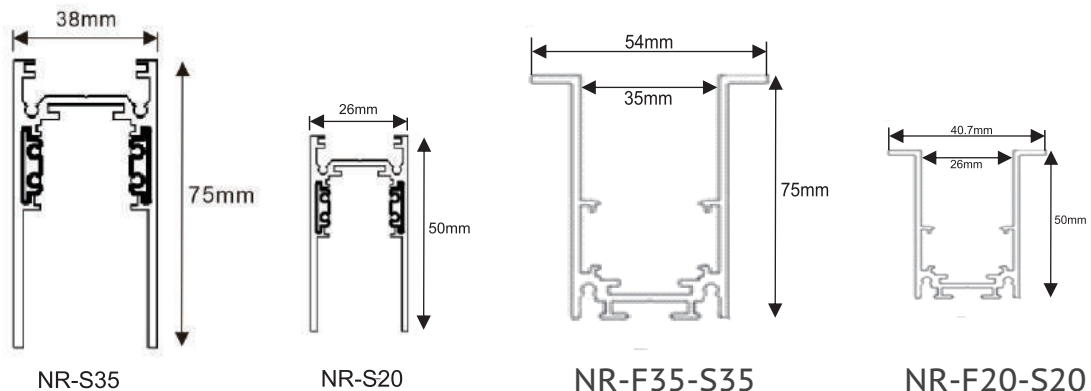






		48V	50Hz 60Hz	CCT 3000K 4000K 6500K	IP20	Ta 55°C	Max 55°C Min 0°C	Ra >85	Life time 50,000h	Beam angle 15°/30°/ 100°
--	--	-----	--------------	--------------------------------	------	------------	---------------------------	-----------	-------------------------	-----------------------------------

Specifications	Installation	Photo	L	W	H	
NR-S20	Surface mounted track		1500mm	26mm	50mm	1kg
NR-S35	Surface mounted track		1500mm	38mm	75mm	1.82kg
NR-F20-S20	Flushbonading track		1500mm	40.7mm	50mm	1.2kg
NR-F35-S35	Flushbonading track		1500mm	54mm	75mm	1.95kg

Track accessories Available for recessed track.							

Dimensions in mm



Specifications	P(W)	Total lumen	Beam Angle	Photo	USE	SIZE	
NR-PN-10-30	10W	1050lm	15°/30°		NR-S20/ NR-S35	Φ40*300mm	0.3kg
NR-TL105-10	10W	1200lm	15°/30°		NR-S20/ NR-S35	Φ56*154mm	0.4kg
NR-TL105-15	15W	1800lm	30°		NR-S20/ NR-S35	Φ56*154mm	0.5kg
NR-S35-DL105-5	5W	525lm	30°		NR-S20/ NR-S35	L136.5*W34*H50.5mm	0.2kg
NR-S35-DL105-10	10W	1000lm	30°		NR-S20/ NR-S35	L269*W34*H50.5mm	0.25kg
NR-S35-DL105-15	15W	1635lm	30°		NR-S20/ NR-S35	L534*W34*H50.5mm	0.8kg
NR-S20-PL105-5	5W	415lm	100°		NR-S20/ NR-S35	L292*W22*H25mm	0.2kg
NR-S20-PL105-15	15W	1245lm	100°		NR-S20/ NR-S35	L580*W22*H25mm	0.3kg
NR-S35-PL105-10	10W	680lm	100°		NR-S20/ NR-S35	L269*W34*H50.5mm	0.4kg
NR-S35-PL105-15	15W	1155m	100°		NR-S20/ NR-S35	L534*W34*H50.5mm	0.8kg
NR-S20-ZD105-5	5W	350lm	30°		NR-S20/ NR-S35	L120*W22*H105mm	0.25kg
NR-S20-ZD105-10	10W	650lm	30°		NR-S20/ NR-S35	L230*W22*H105mm	0.35kg
NR-S35-ZD105-5	5W	500lm	30°		NR-S20/ NR-S35	L150*W34*H120mm	0.2kg
NR-S35-ZD105-10	10W	1090lm	30°		NR-S20/ NR-S35	L282*W34*H120mm	0.3kg




3000K



4000K



6500K

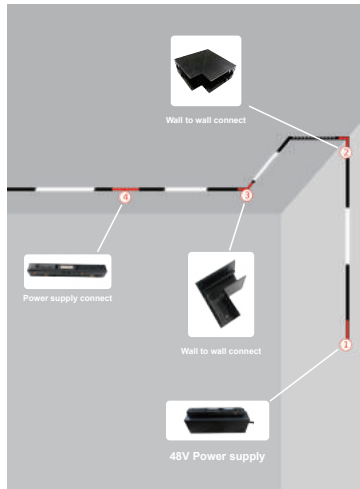


Description:
LED Magnetic track system

Main material :
Die-cast aluminum
Engineering plastic+PC

Specification
 . Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
 . High quality light, high color rendering, less heat, no UV or IR radiation
 LED driver is included
 IP 20




Applications
 . Office
 . Supermarket
 . Clothing store

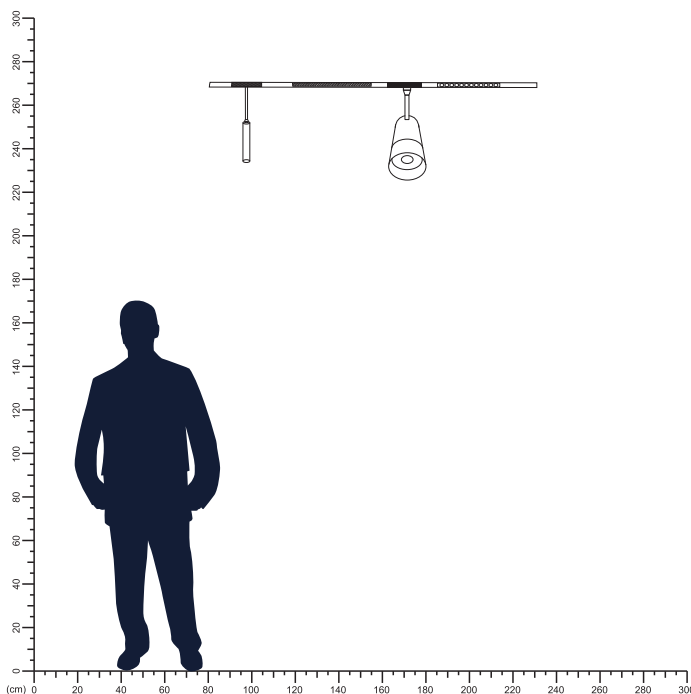



Flushbonading track Installation method



Cut a hole with $\Phi 27\text{mm}$ or $\Phi 38\text{mm}$
(NR-S20) (NR-S35)

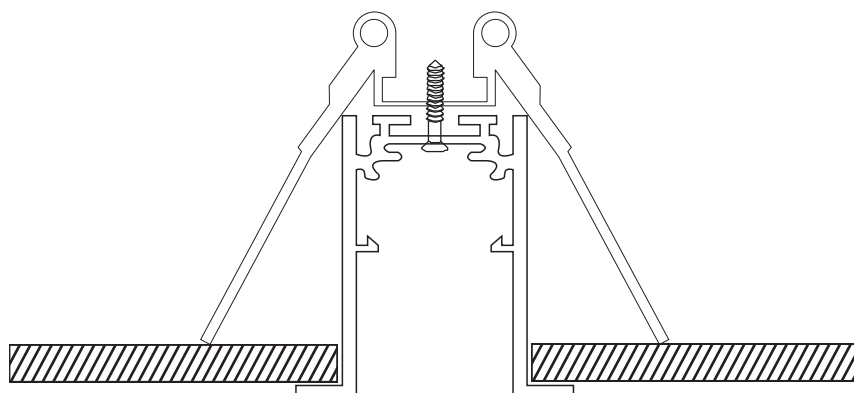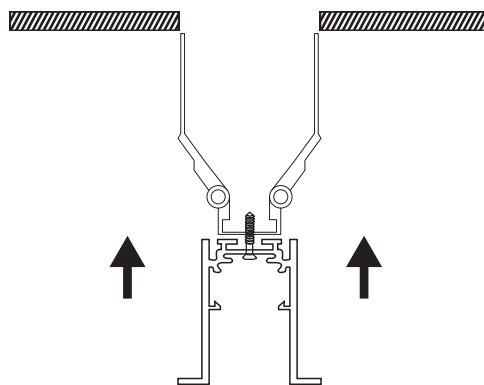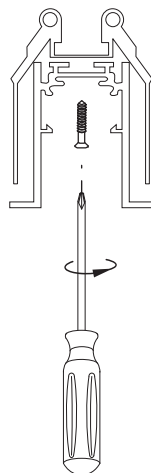

Surface track Installation method



Ceiling track Installation method

