



NR-1.2M-24 Series


LED Line Light
IP65



Item Code	P(W)	CCT	lm/w	Total Lumen	Beam Angle	Dimensions in mm			kg
						A	B	C	
NR-1.2M-24 3000K	24	3000K	80	1920	120°	1200	67	45	0.50
NR-1.2M-24 4000K	24	4000K	124	2976	120°	1200	67	45	0.50
NR-1.2M-24 6500K	24	6500K	124	2976	120°	1200	67	45	0.50
NR-1.5M-40 4000K	40	4000K	112.75	4510	120°	1500	67	45	0.55

Dimensions in mm

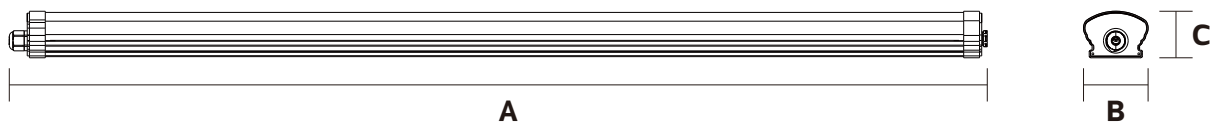


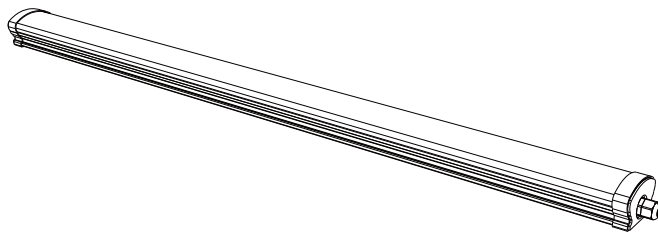


Description:
LED Line Light


Main material:
Engineering plastics

Specification:
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rendering, less heat, no UV or IR radiation LED driver is included IP65

Applications:
.Office
.Lab
.Meeting room

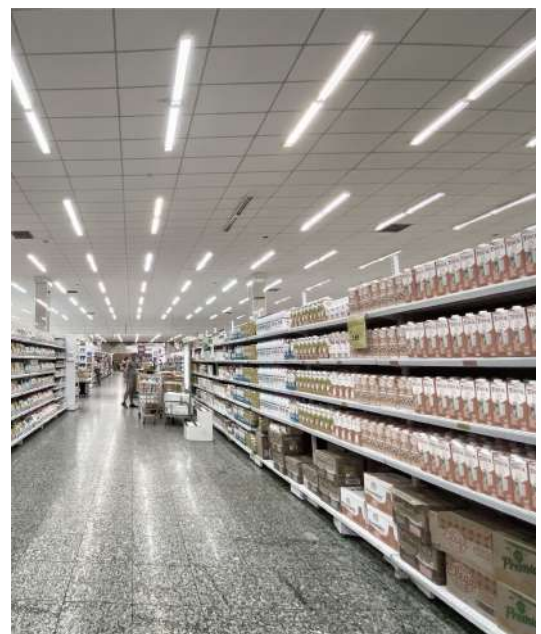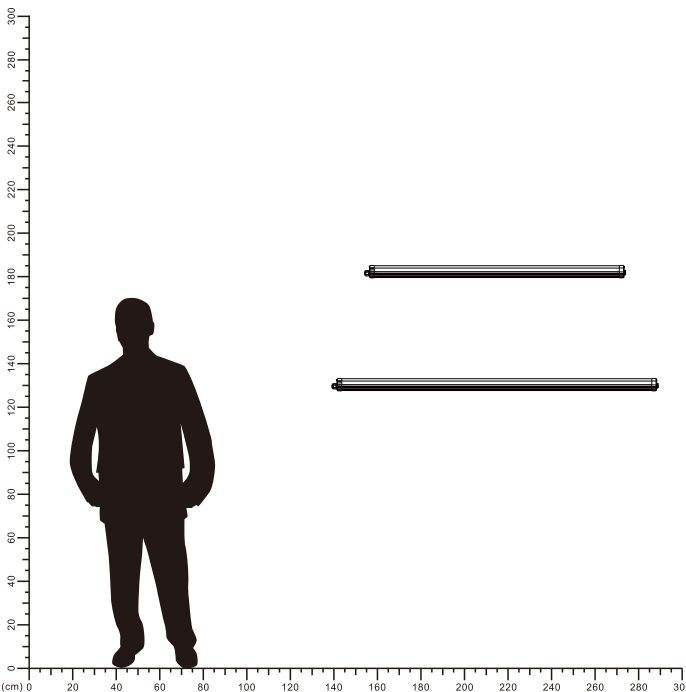


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

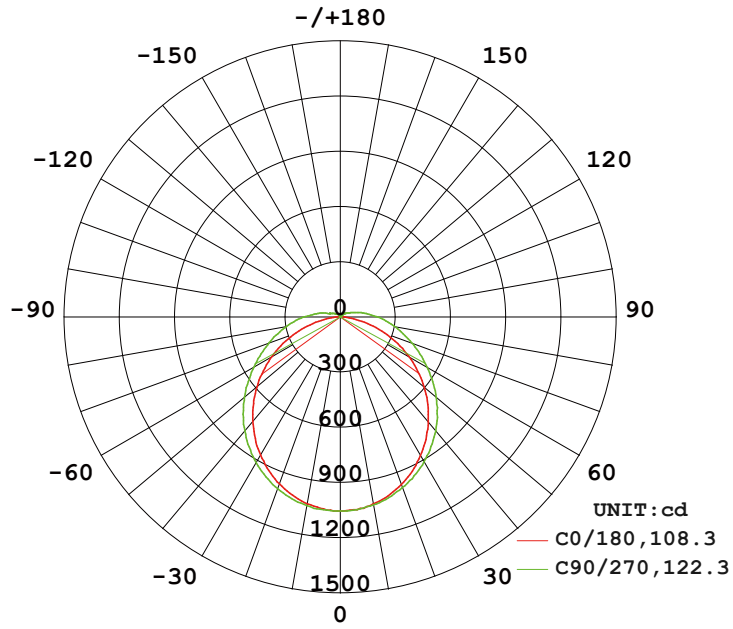


AVERAGE BEAM ANGLE (50%) : 115.3 DEG

Illuminance at a Distance

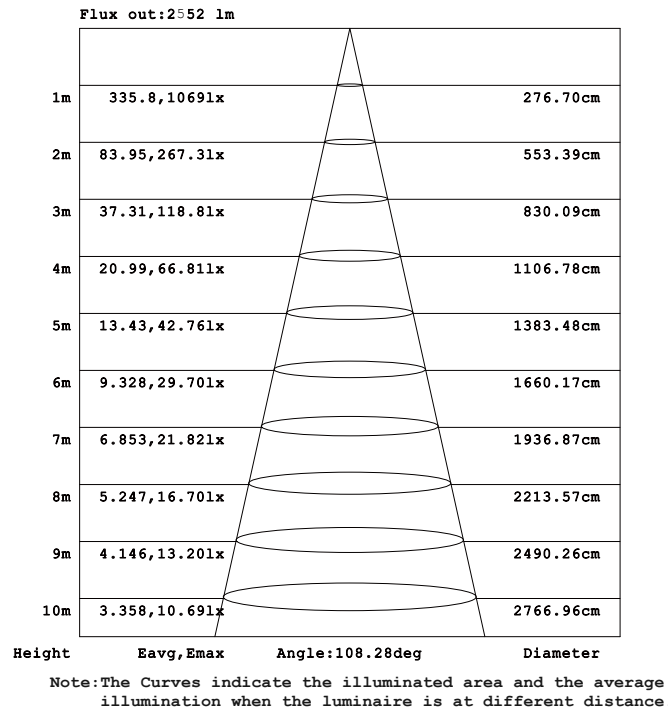


Model: NR-1.2M-24 3000K

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

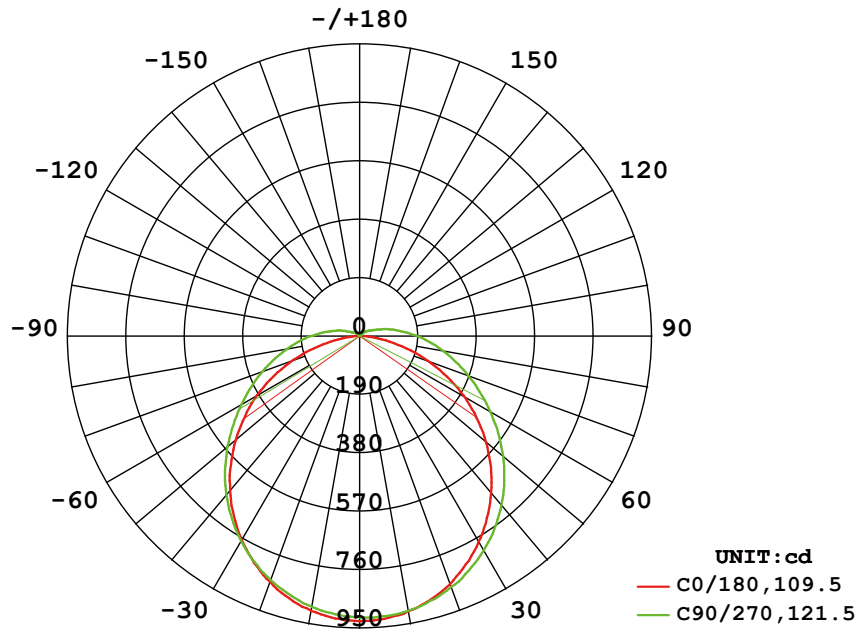


AVERAGE BEAM ANGLE (50%) : 115.5 DEG

Illuminance at a Distance

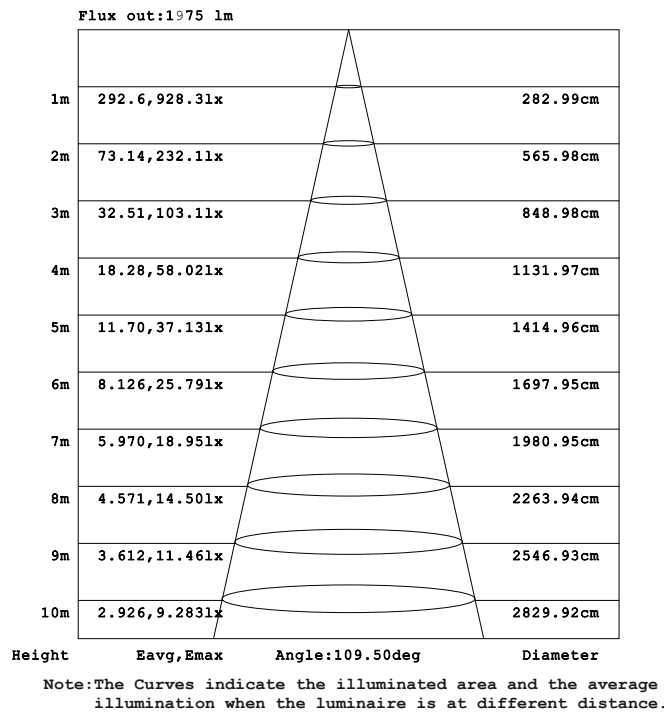


Model: NR-1.2M-24 4000K

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

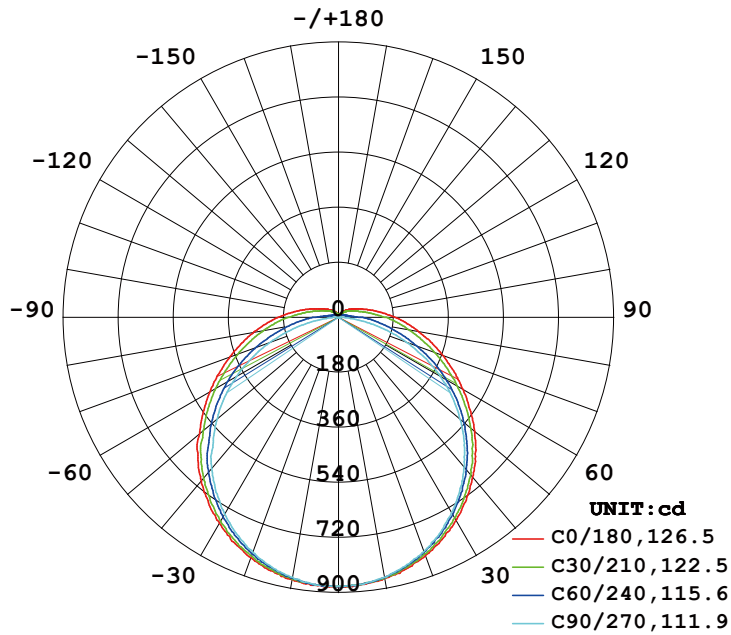

AVERAGE BEAM ANGLE (50%) : 119.1 DEG

Illuminance at a Distance

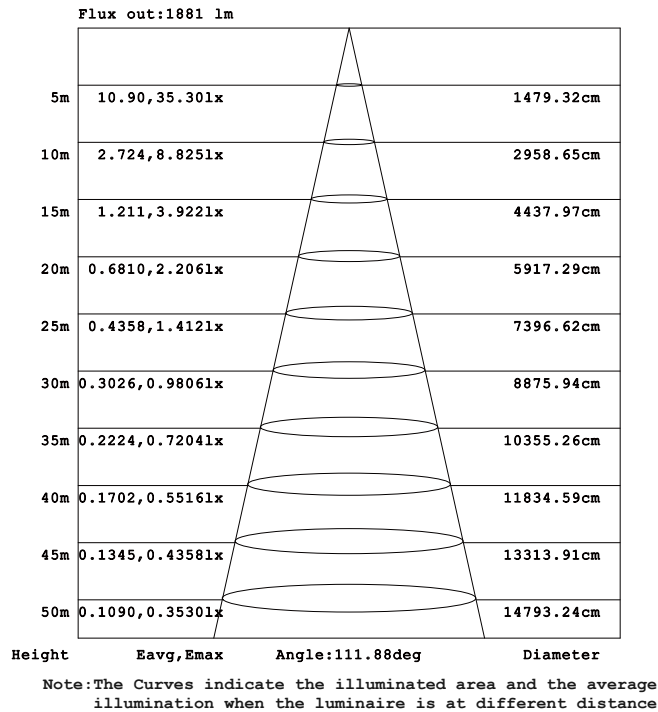

Model: NR-1.2M-24 6500K

