



## NR-1.2M-24 Series


LED Line Light  
IP65



Item Code	P(W)	CCT	lm/w	Total Lumen	Beam Angle	Dimensions in mm			kg
						A	B	C	
NR-1.2M-24 3000K	24	3000K	140	3360	120°	1200	67	45	0.50
NR-1.2M-24 4000K	24	4000K	140	3360	120°	1200	67	45	0.50
NR-1.2M-24 6500K	24	6500K	124	2976	120°	1200	67	45	0.50
NR-1.5M-36 3000K	36	3000K	140	5040	120°	1500	67	45	0.55
NR-1.5M-36 4000K	36	4000K	140	5040	120°	1500	67	45	0.55
NR-1.5M-36 6500K	36	6500K	140	5040	120°	1500	67	45	0.55

### Dimensions in mm




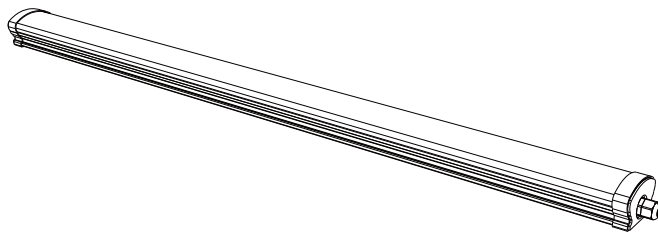


**Description:**  
LED Line Light


**Main material:**  
Engineering plastics

**Specification:**  
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps  
High quality light, high color rendering, less heat, no UV or IR radiation LED driver is included IP65

**Applications:**  
.Office  
.Lab  
.Meeting room

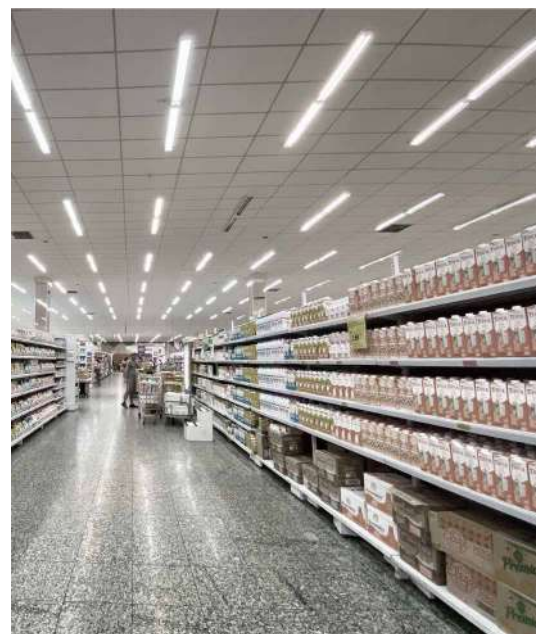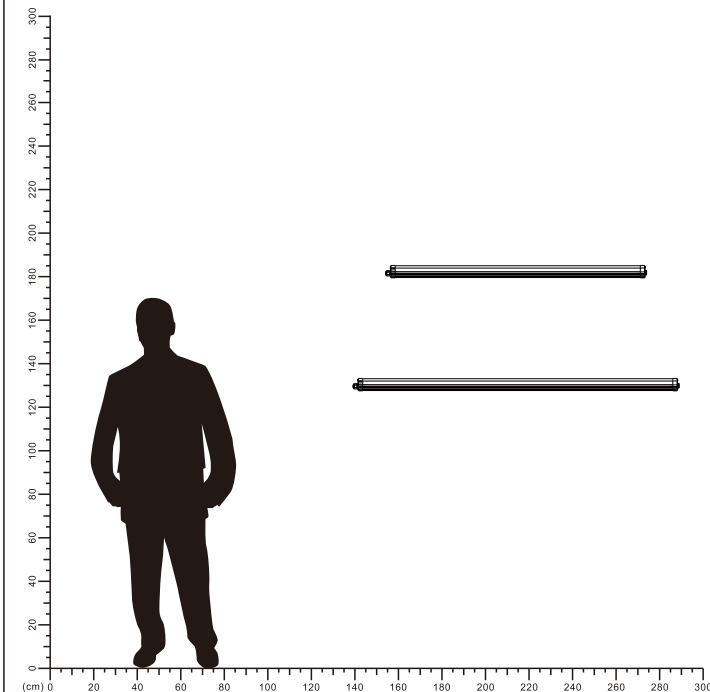


# LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

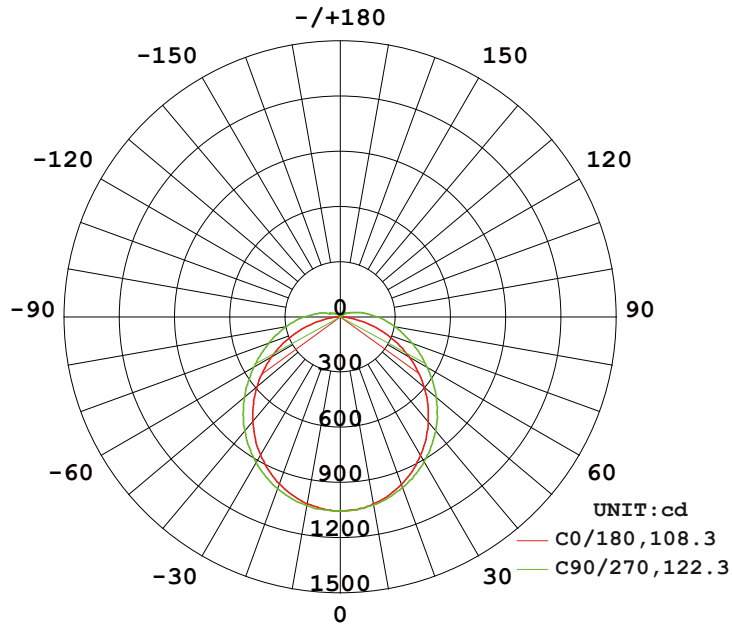


**AVERAGE BEAM ANGLE (50%) : 115.3 DEG**

## Illuminance at a Distance

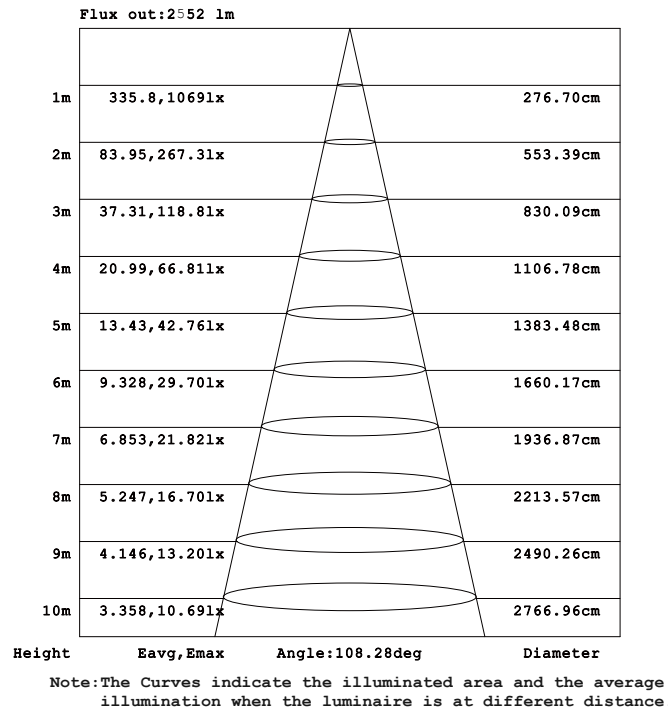


**Model: NR-1.2M-24 3000K**

# LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

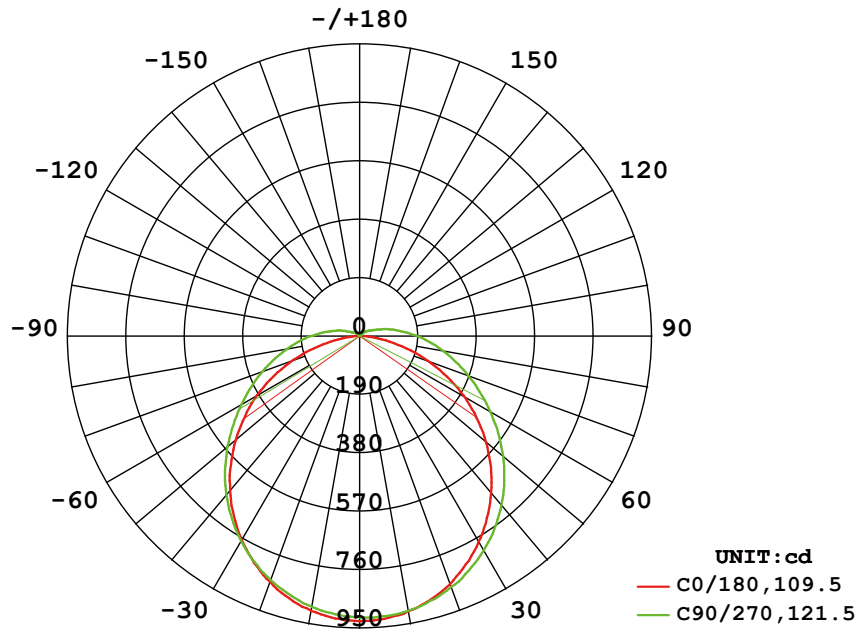


AVERAGE BEAM ANGLE (50%) : 115.5 DEG

## Illuminance at a Distance

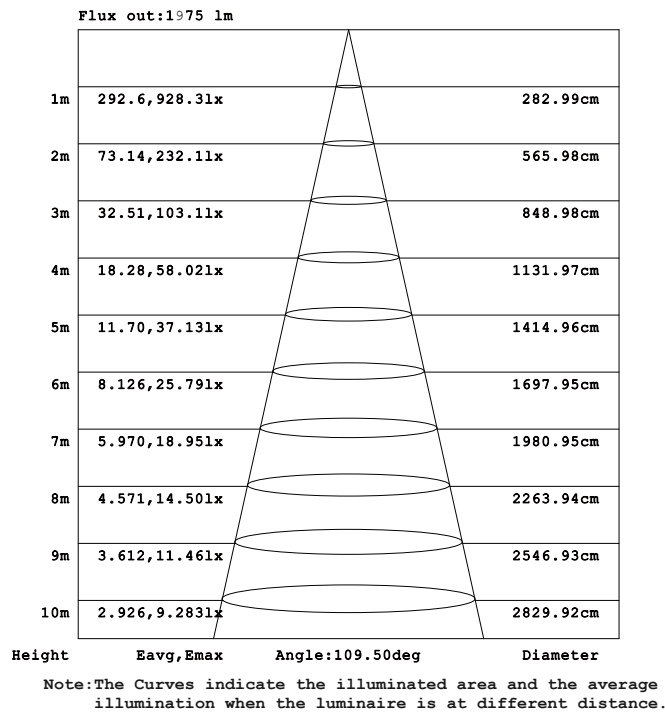


**Model: NR-1.2M-24 4000K**

# LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

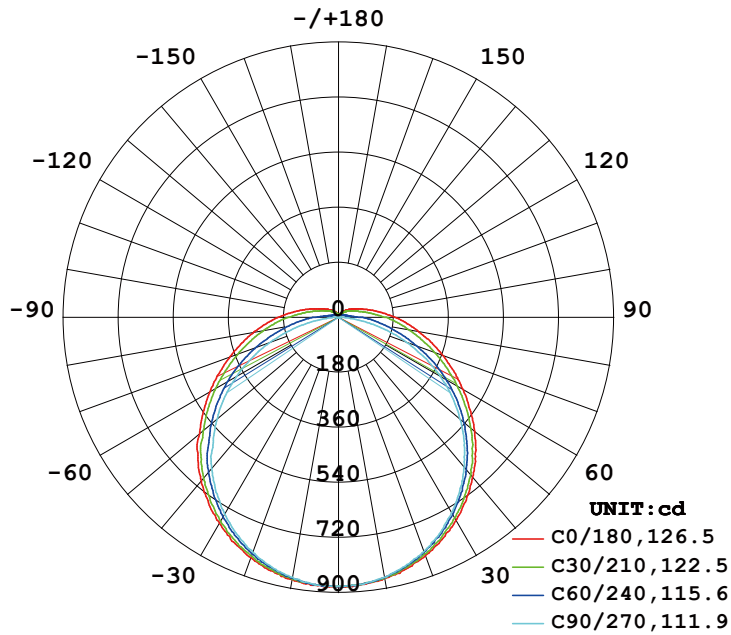

**AVERAGE BEAM ANGLE (50%) : 119.1 DEG**

## Illuminance at a Distance

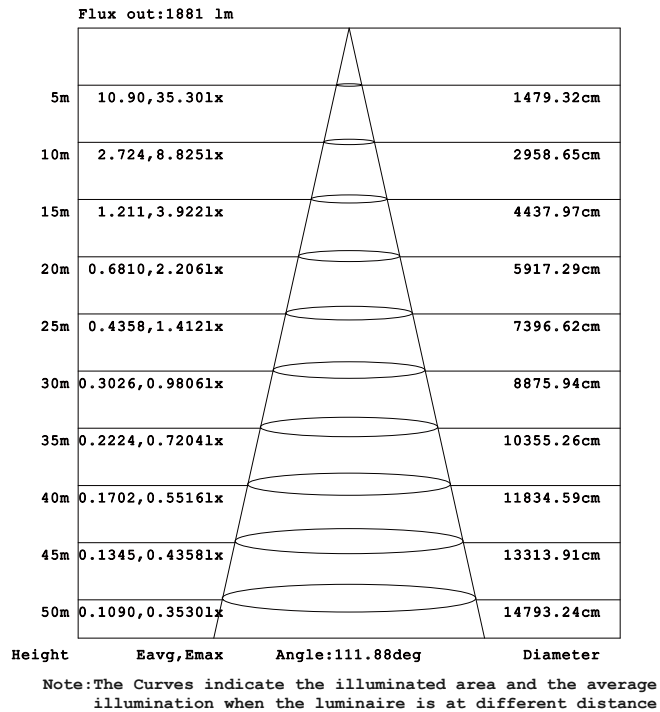

**Model: NR-1.2M-24 6500K**

