




## LED LINE LIGHT



NR-AL101-36-PC Series  
IP20



Item Code	P (W)	Beam angle	Output (lm)	lm/w	Color	Dimensions in mm			kg
						A	B	C	
NR-AL101-36-PC-W	36	100°	3841	106.7	White	1204	33	60	1.15
NR-AL101-36-PC-BK	36	100°	3841	106.7	Black	1204	33	60	1.15

### Dimensions in mm



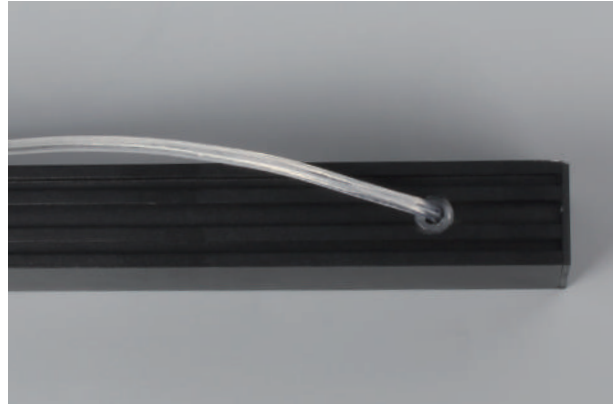


**Description:**  
LED LINE LIGHT


**Main material:**  
Aluminium+Engineering plastics

**Specification**  
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps  
High quality light, high color rendering, less heat, no UV or IR radiation  
LED driver is included  
IP20

**Applications**  
. Shopping mall  
. Office buildings  
. Exhibition hall

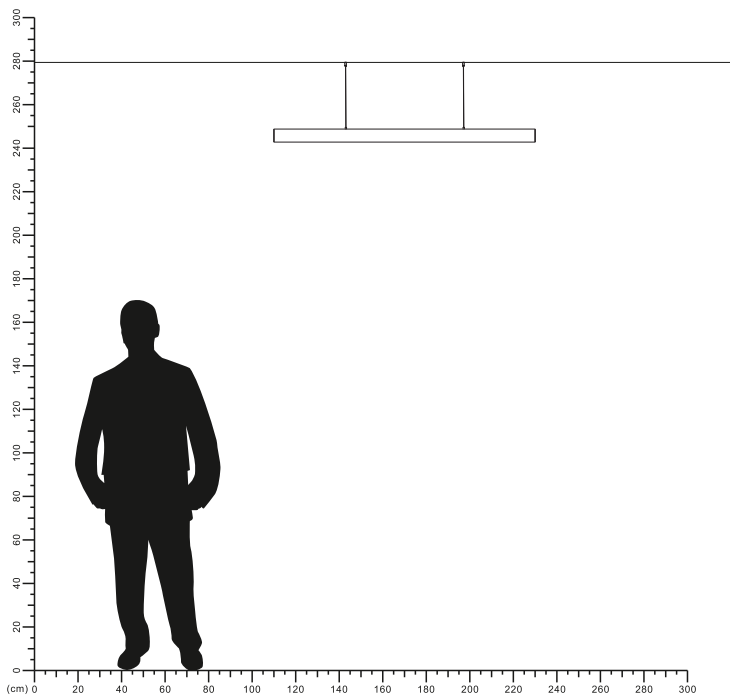

# LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

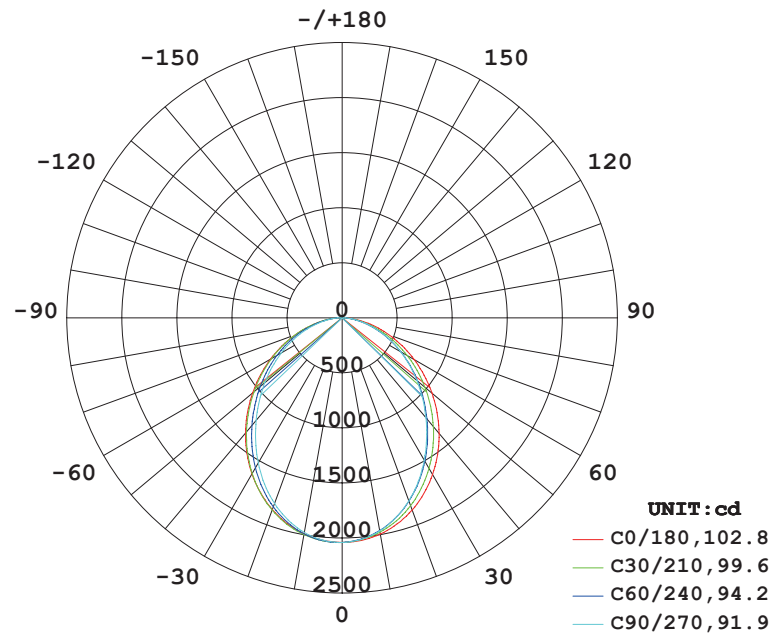

**AVERAGE BEAM ANGLE (50%) : 97.1 DEG**



## Illuminance at a Distance

Flux out: 2943 lm

1m	873.5, 2064lx	203.34cm
2m	218.4, 516.1lx	406.68cm
3m	97.05, 229.4lx	610.02cm
4m	54.59, 129.0lx	813.37cm
5m	34.94, 82.58lx	1016.71cm
6m	24.26, 57.34lx	1220.05cm
7m	17.83, 42.13lx	1423.39cm
8m	13.65, 32.26lx	1626.73cm
9m	10.78, 25.49lx	1830.07cm
10m	8.735, 20.64lx	2033.41cm

Height                      Eavg, Emax                      Angle: 90.95deg                      Diameter

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

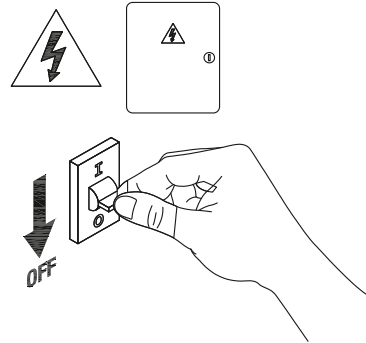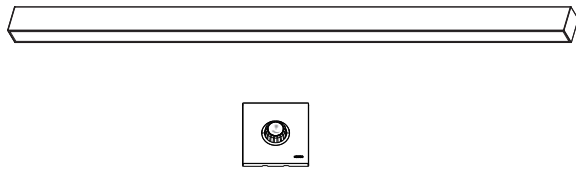


1

Turn off The Power




2

Drill 2 holes on your ceiling and Fix screw

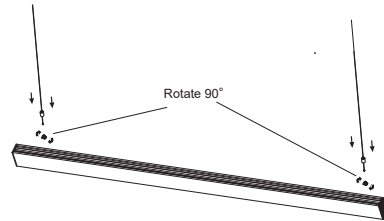


3

Fixing the lamp body

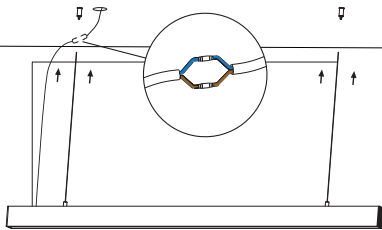


4

Connect the cable

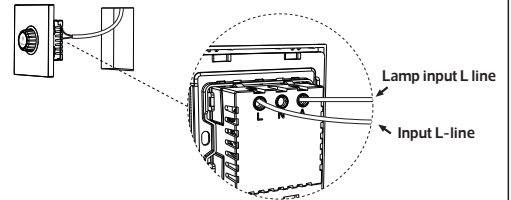


5

The dimming panel is connected to the luminaire cable



6

Turn on the power

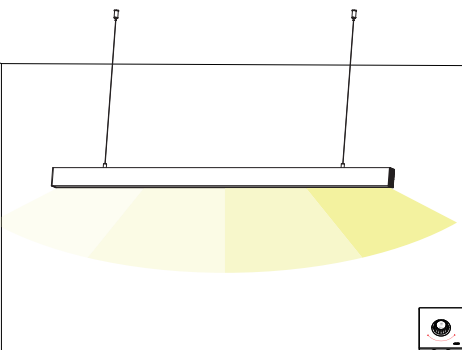

7

The rotating dimmer controls the light level

