




NOORCO نوركو

Meshkati مشكاتي
Lighting & electricity للإضاءة والكهرباء

Recessed LED Line Light NR-AL104 Series IP20

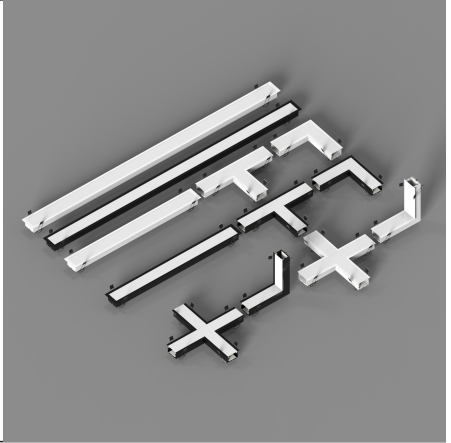



indoor 	AC 220-240V	50/60 Hz	PF ≥0.9	CCT 6500K 4000K 3000K	Ra ≥80	IP20	99 lm/W	Beam Angel 120°	Chips SMD	
------------	----------------	-------------	------------	--------------------------------	-----------	------	------------	-----------------------	--------------	--

Item Code	P(W)	Body Color	Total Lumen	Beam Angle	Dimensions in mm				
					A	B	C		
NR-AL104-40	40	White/Black	3960	120°	1226	66	63	55x1215	1.35
NR-AL104-20	20	White/Black	1980	120°	626	66	63	55x615	0.79
NR-AL104L-20	20	White/Black	1980	120°	375	334	35	55x375x334	0.61
NR-AL104T-20	20	White/Black	1980	120°	360	334	35	55x360x334	0.605
NR-AL104X-20	20	White/Black	1980	120°	360	320	35	55x360x320	0.6
NR-AL104WL-20	20	White/Black	1980	120°	365	290	63	55x365x290	0.585




The luminaire is not suitable for covering with thermally insulated material.

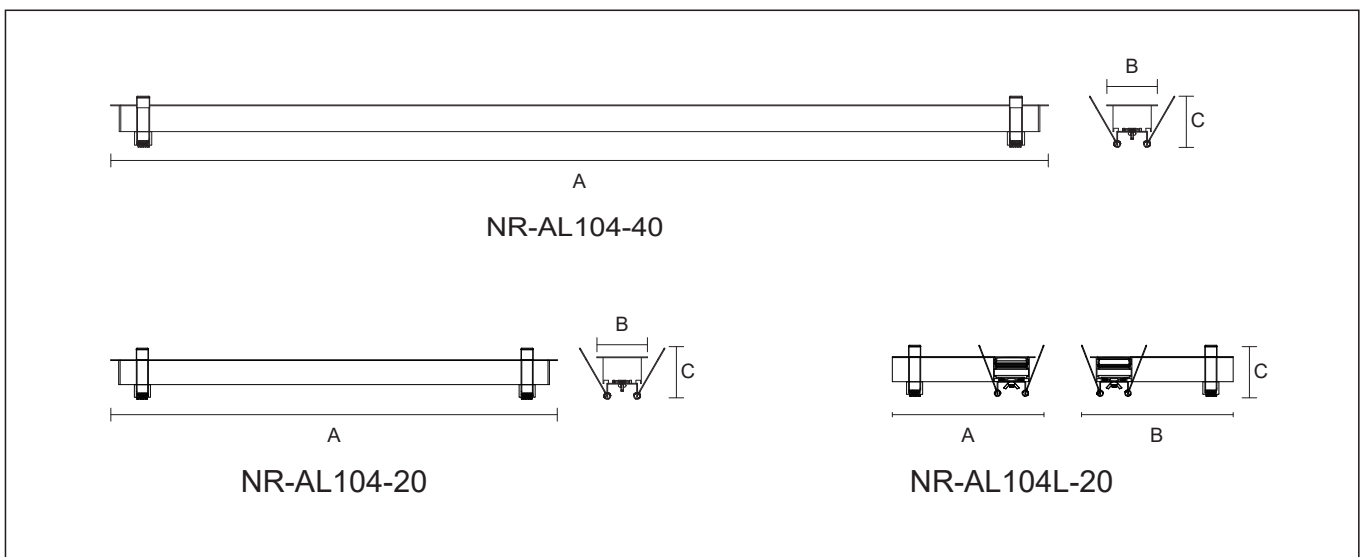




NR-AL104T-20




NR-AL104X-20



NR-AL104WL-20




White [5700–6500K]



Natural White [4000–5000K]



Warm [2800–3400K]


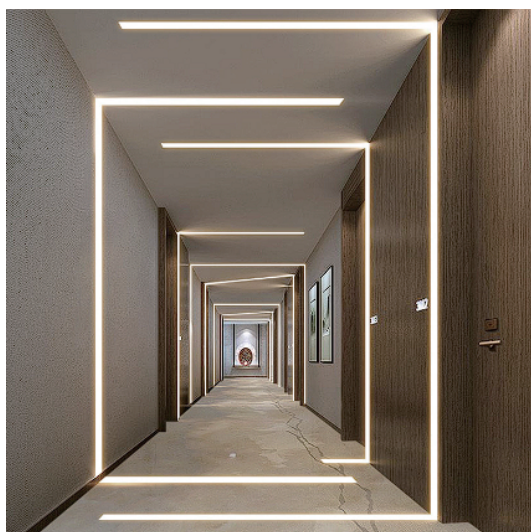


Description:
Recessed LED Line Downlight
Construction


Main material:
High-grade die-cast aluminum shell, high quality reflective cup, efficient heat dissipation at the bottom, powder spraying treatment on the surface, anti-corrosion, anti-rust, no fading, fashion modeling

Specification:
Energy saving, upto 85% energy saving comparing to standard halogen and incandescent lamps Long life, upto 50,000 hours
High quality light, high color rendering, less heat, no UV or IR radiation

Applications
Shopping mall
Office buildings
Exhibition hall

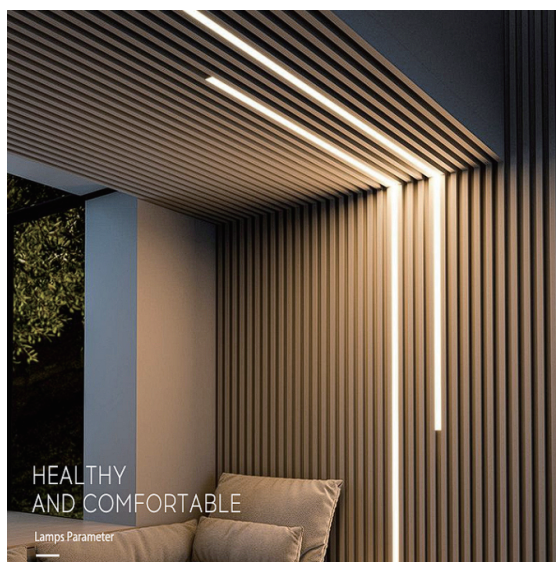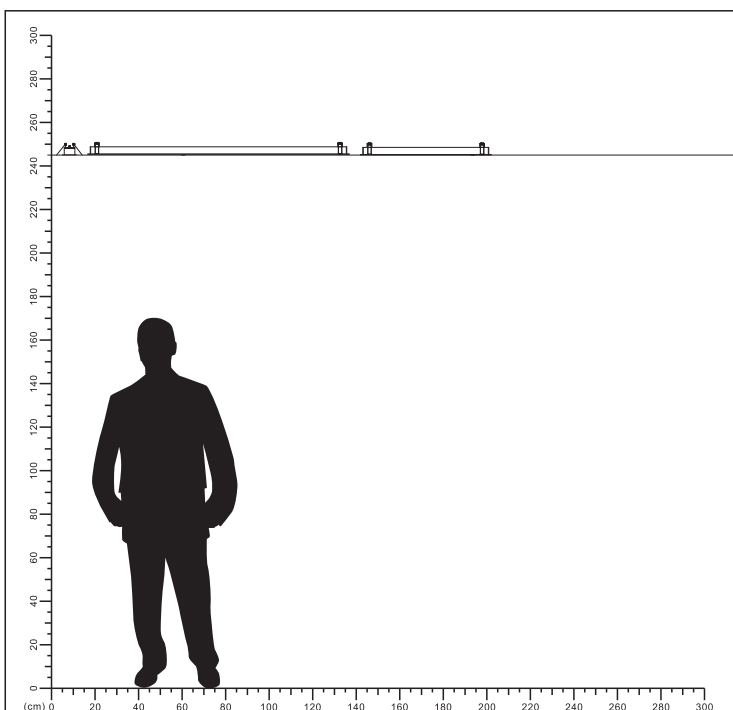


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

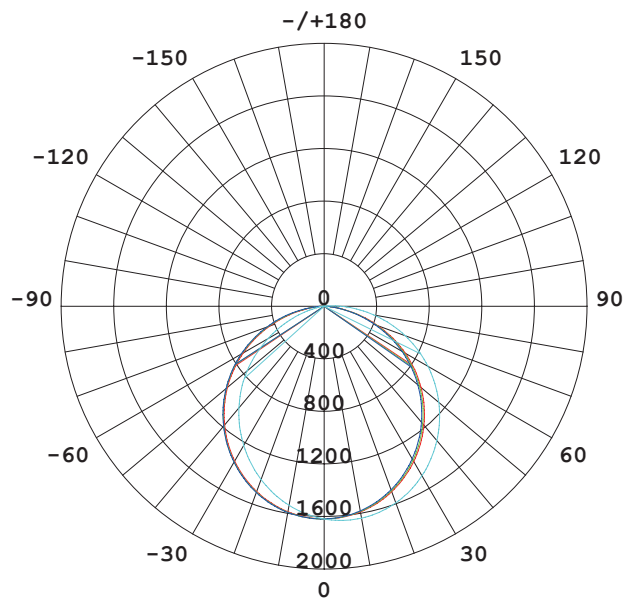

UNIT: cd
— C0/180, 112.4
— C30/210, 112.3
— C60/240, 111.9
— C90/270, 111.6


AVERAGE BEAM ANGLE (50%) : 112.0 DEG

Illuminance at a Distance

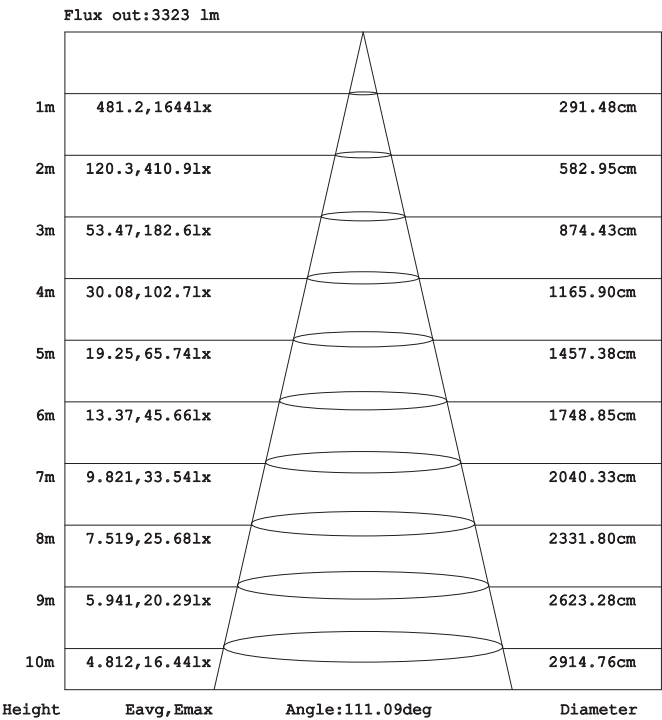


Model: NR-AL104-40

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

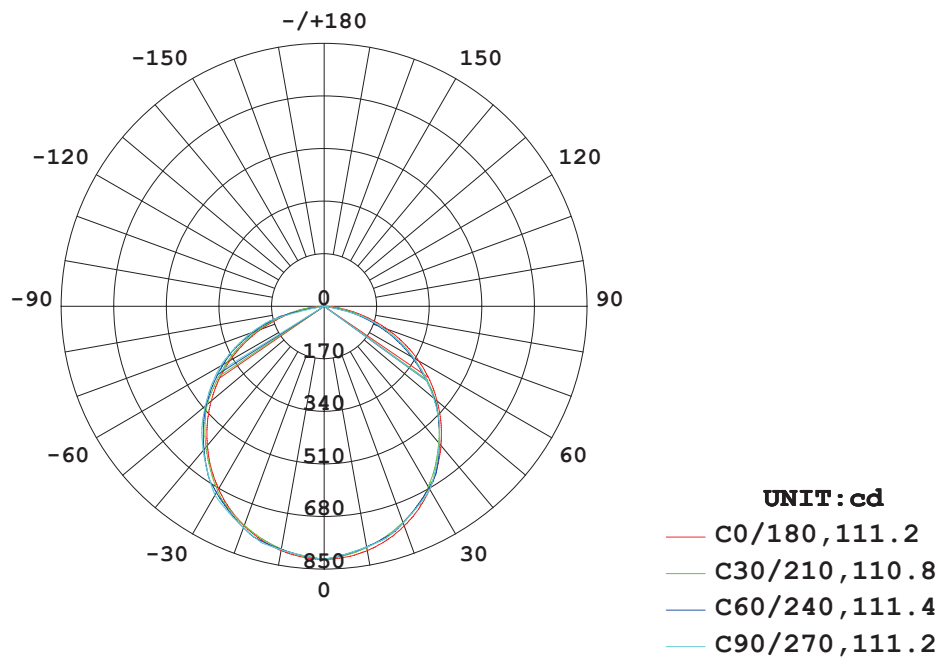


AVERAGE BEAM ANGLE (50%) : 111.4 DEG

Illuminance at a Distance

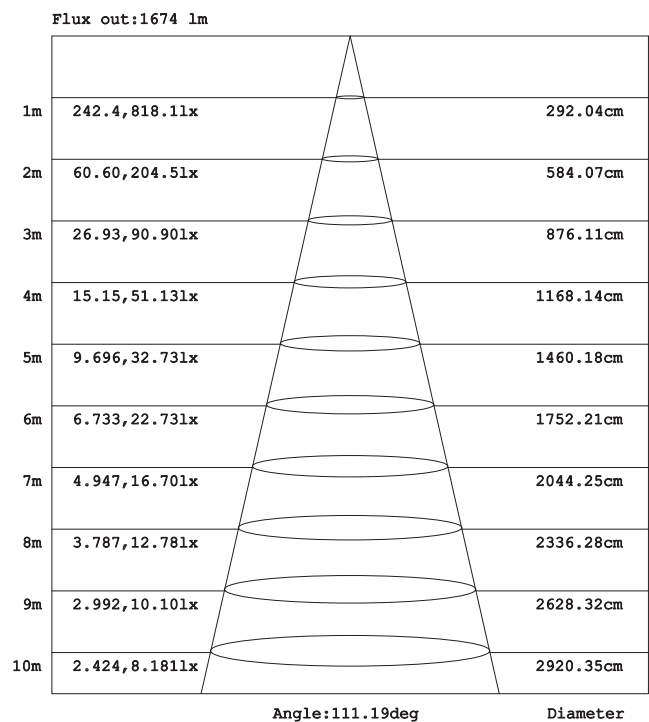

Model: NR-AL104-20


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

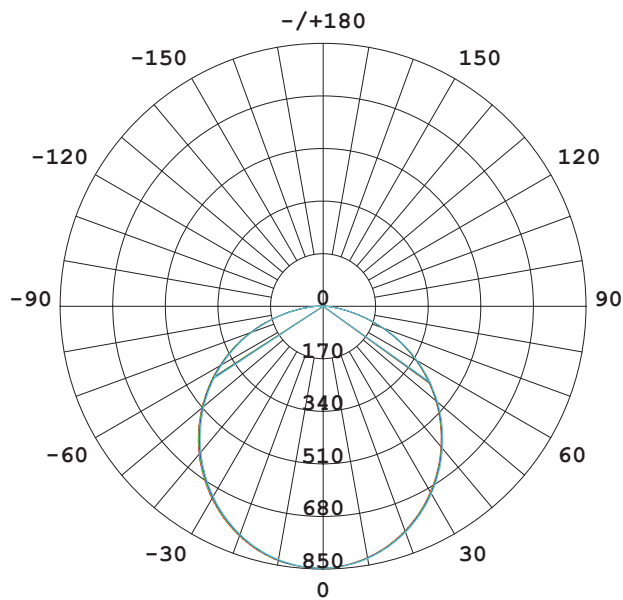

UNIT: cd
— C0/180, 111.2
— C30/210, 111.2
— C60/240, 111.2
— C90/270, 111.2


AVERAGE BEAM ANGLE (50%) : 111.2 DEG

Illuminance at a Distance

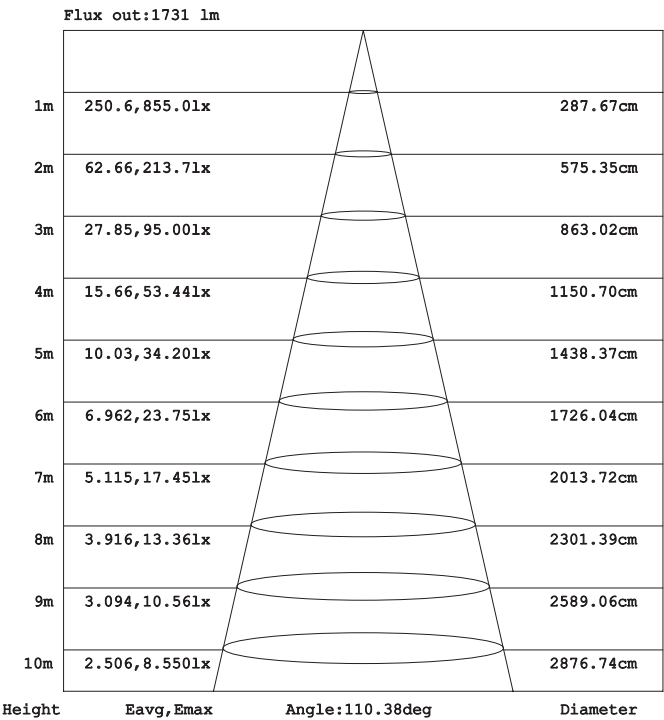


Model: NR-AL104L-20

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

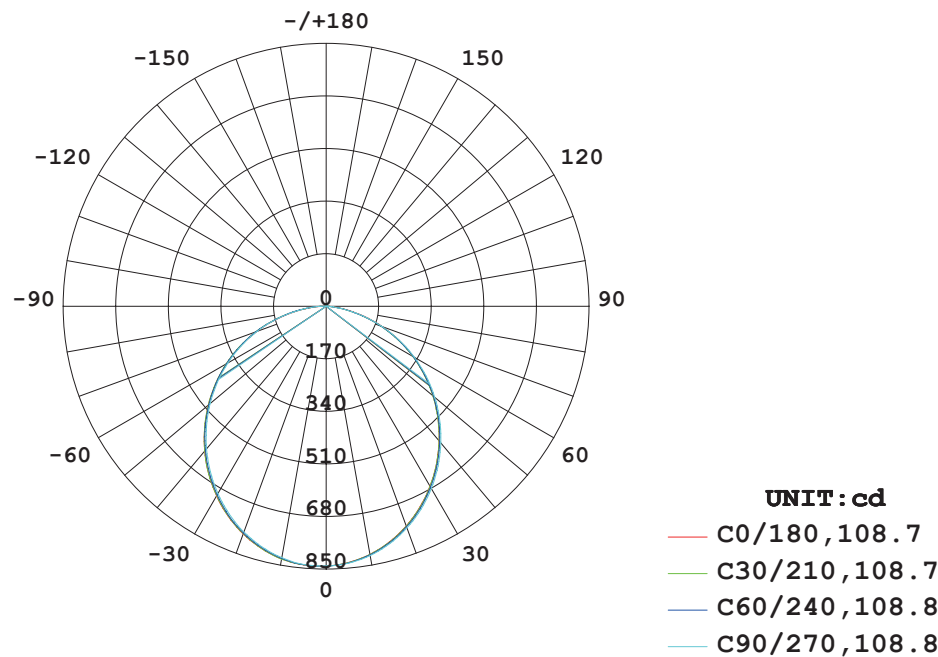


AVERAGE BEAM ANGLE (50%) : 108.8 DEG

Illuminance at a Distance

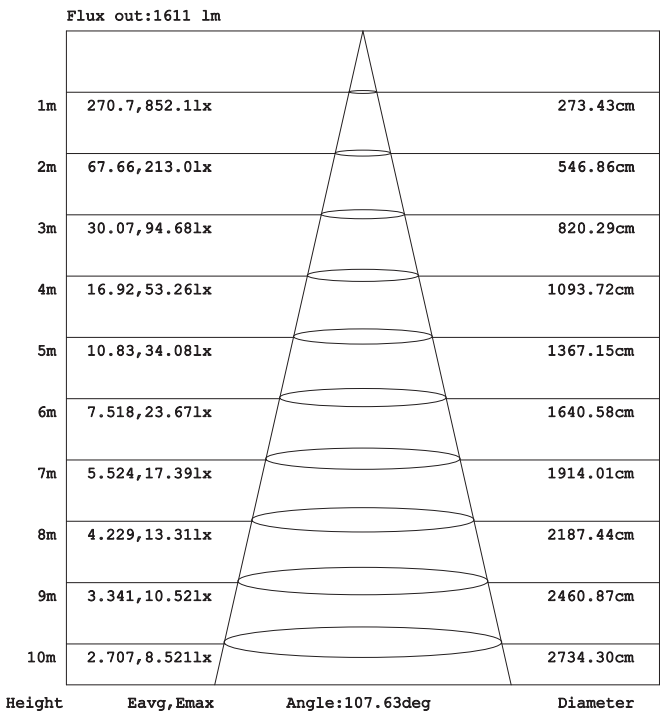


Model: NR-AL104T-20

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

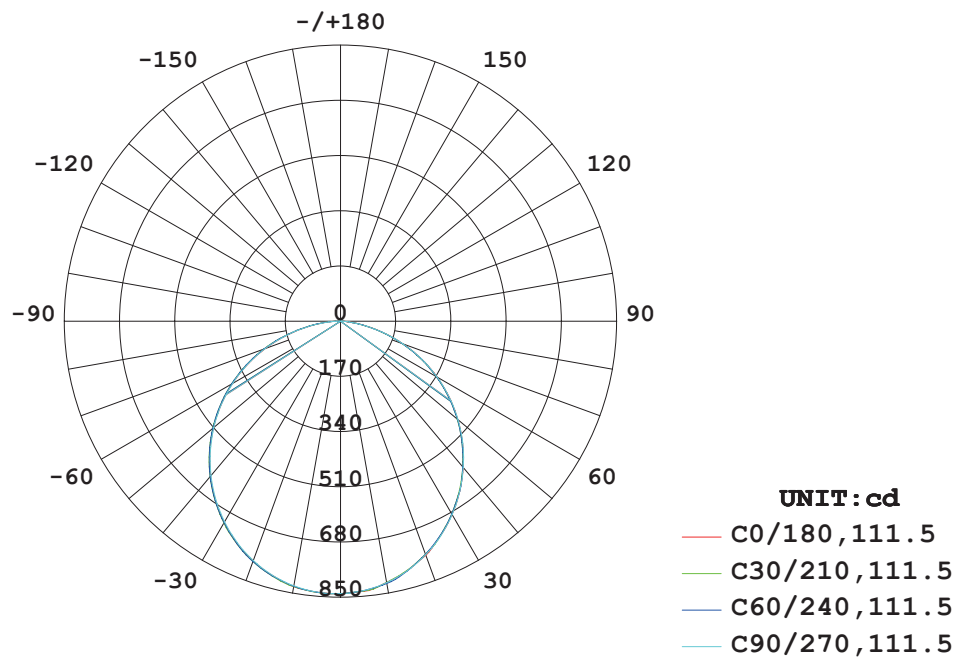


AVERAGE BEAM ANGLE (50%) : 111.5 DEG

Illuminance at a Distance

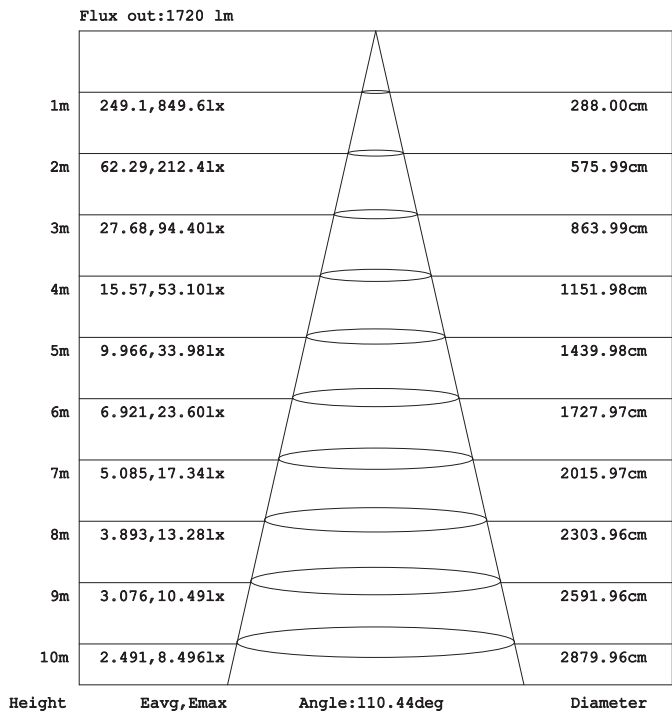


Model:NR-AL104X-20

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

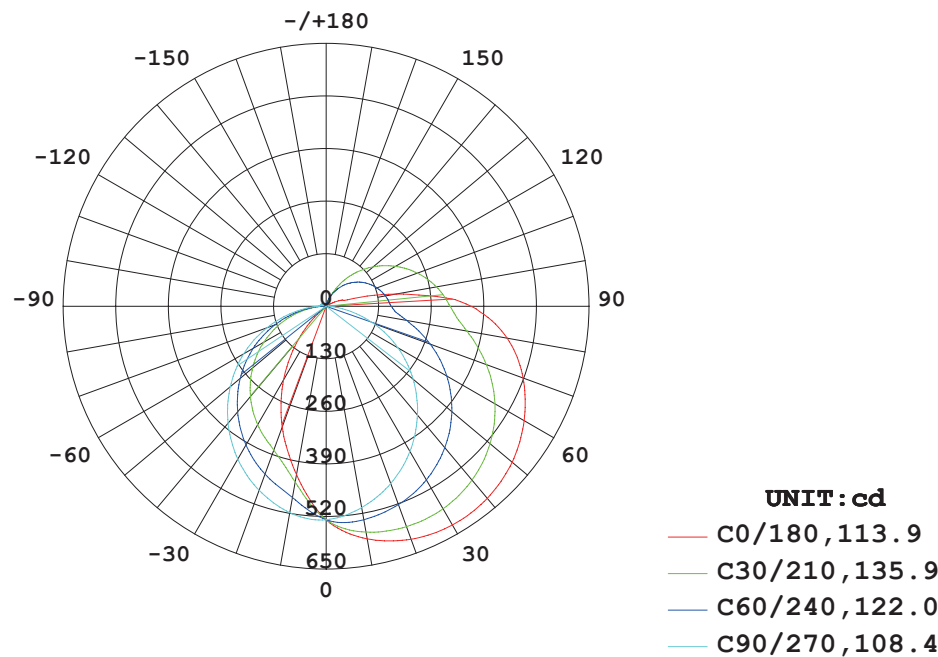


AVERAGE BEAM ANGLE (50%) : 120.0 DEG

Illuminance at a Distance

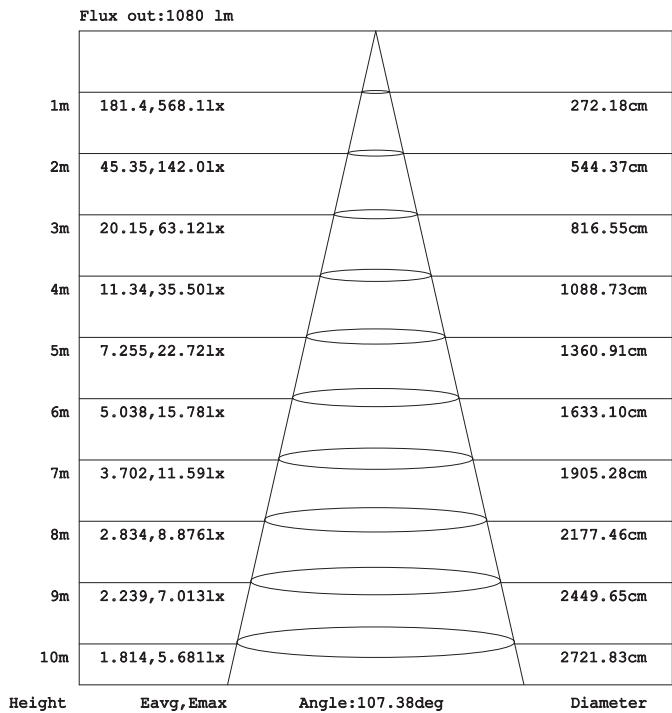


Model: NR-AL104WL-20



NR-AL104-40




NR-AL104-20

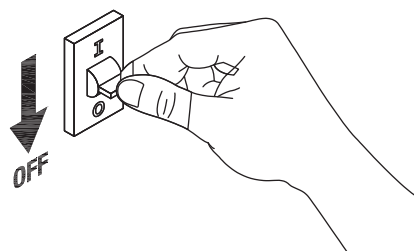


Turn off The Power

1




Cut a hole in your ceiling
(55x1215mm)

2

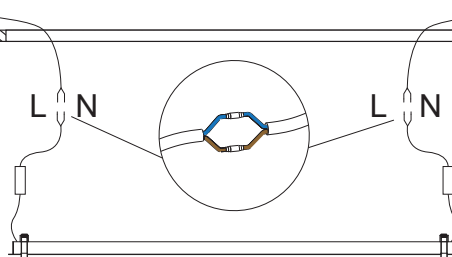

Connect the cable

3



Install into the ceiling



Install complete