


LED Line Light Series


NR-AL104 Series


IP20




Item Code	P(W)	CCT(K)	Total Lumen	Beam Angle	Dimensions in mm			mm	kg
					A	B	C		
NR-AL104-40	40	6500/4000/3000	3960	120°	1226	66	63	1215x55	1.35
NR-AL104-20	20	6500/4000/3000	2060	120°	626	66	63	615x55	0.79
NR-AL104L-20	20	6500/4000/3000	2060	120°	375	334	35	375x334x55	0.61
NR-AL104T-20	20	6500/4000/3000	2060	120°	360	334	35	360x334x55	0.605
NR-AL104X-20	20	6500/4000/3000	2060	120°	360	320	35	360x320x55	0.6
NR-AL104WL-20	20	6500/4000/3000	2060	120°	365	290	63	365x290x55	0.585

Dimensions in mm

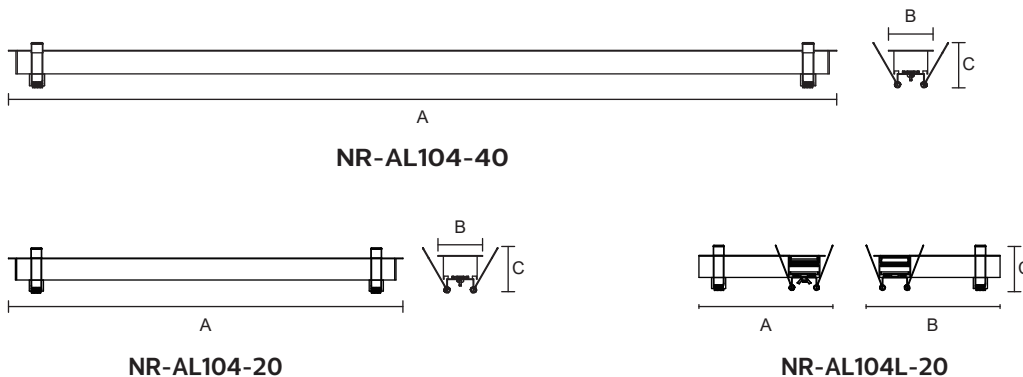





NR-AL104T-20



NR-AL104X-20



NR-AL104WL-20

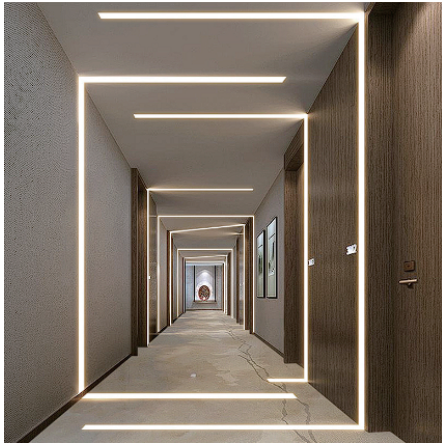

Description:

Recessed LED Downlight

Main material:



High-grade die-cast aluminum shell, high quality reflective cup and anti-glare components, efficient heat dissipation at the bottom, powder spraying treatment on the surface, anti-corrosion, anti-rust, no fading, fashion modeling

Specification:


Energy saving, upto 85% energy saving comparing to standard halogen and incandescent lamps Long life, upto 50,000 hours High quality light, high color rendering, less heat, no UV or IR radiation

Applications

- . Shoping mall
- . Office buildings
- . Exhibition hall

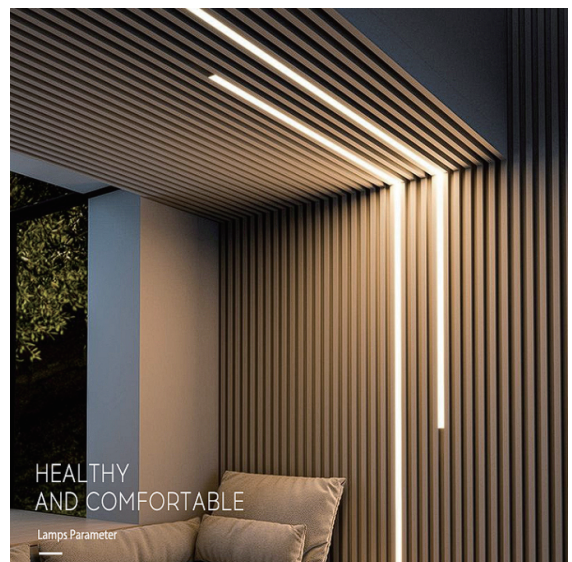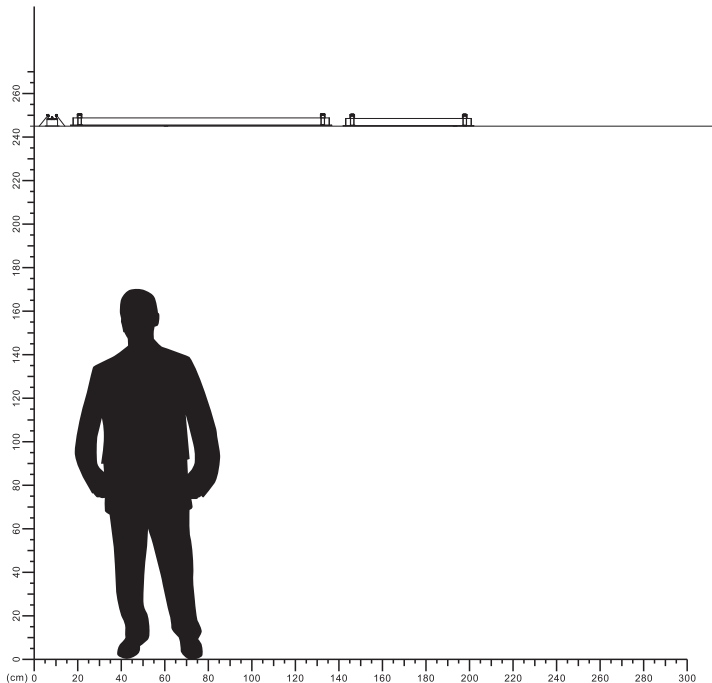


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

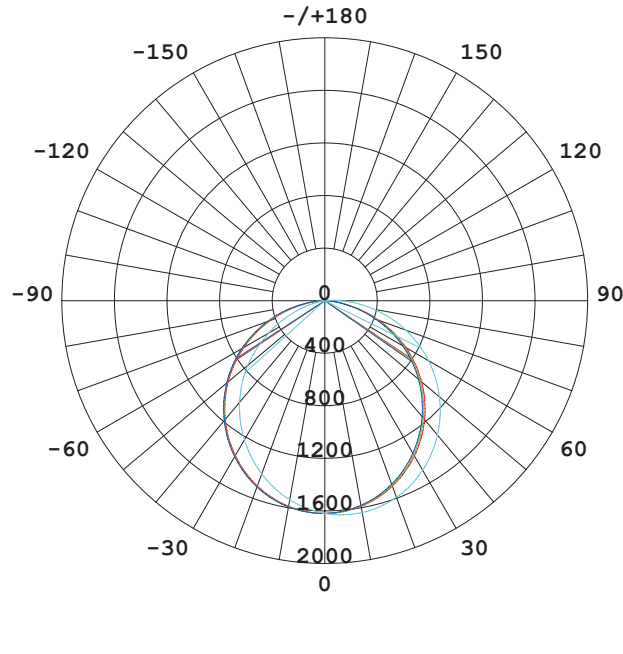


AVERAGE BEAM ANGLE (50%) : 112.0 DEG

Illuminance at a Distance

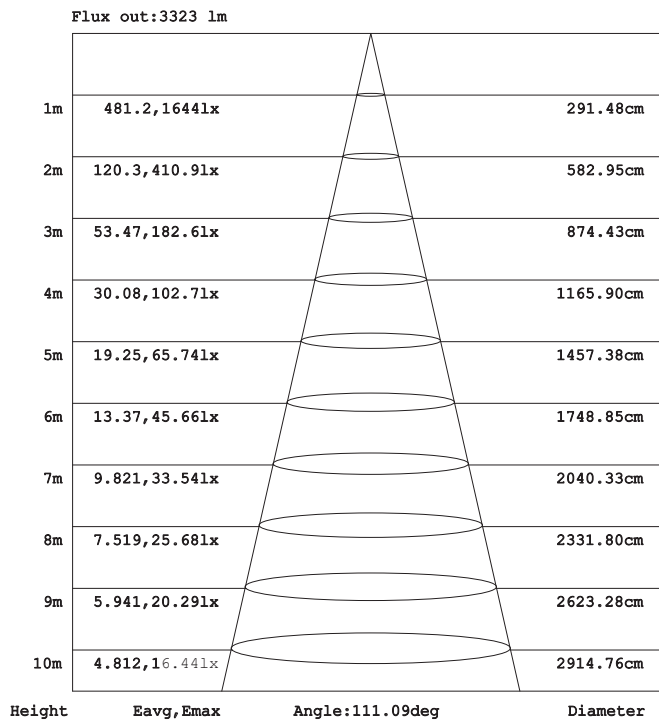


Model: NR-AL104-40

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

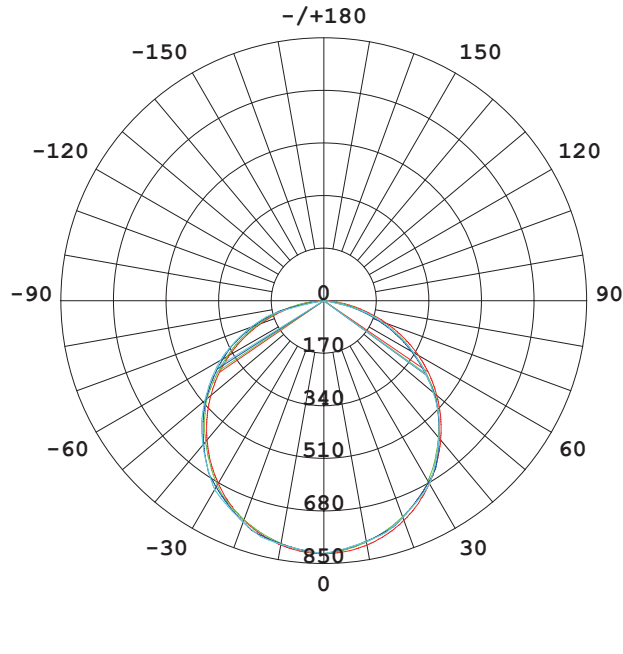


AVERAGE BEAM ANGLE (50%) : 111.4 DEG

Illuminance at a Distance

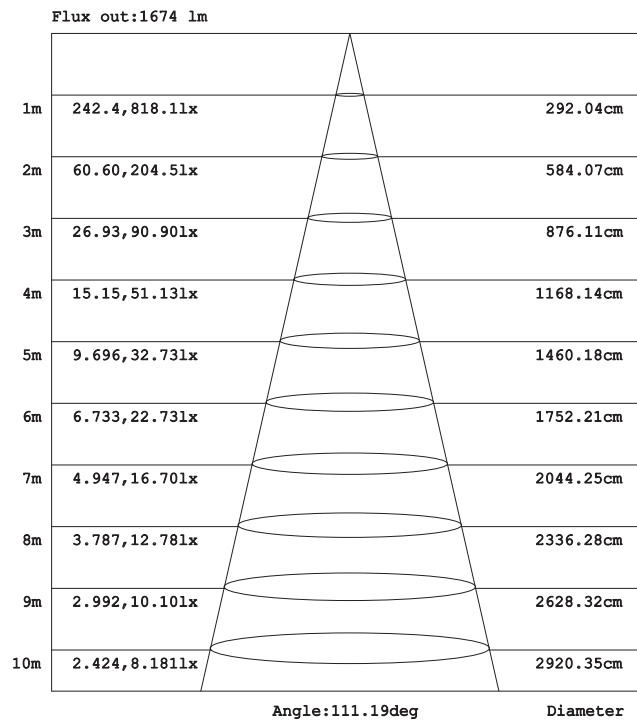


Model:NR-AL104-20

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

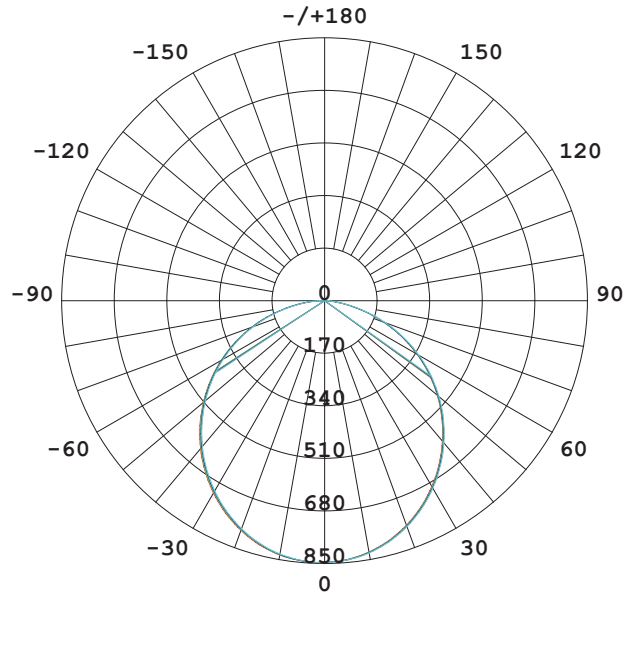


AVERAGE BEAM ANGLE (50%) : 111.2 DEG

Illuminance at a Distance

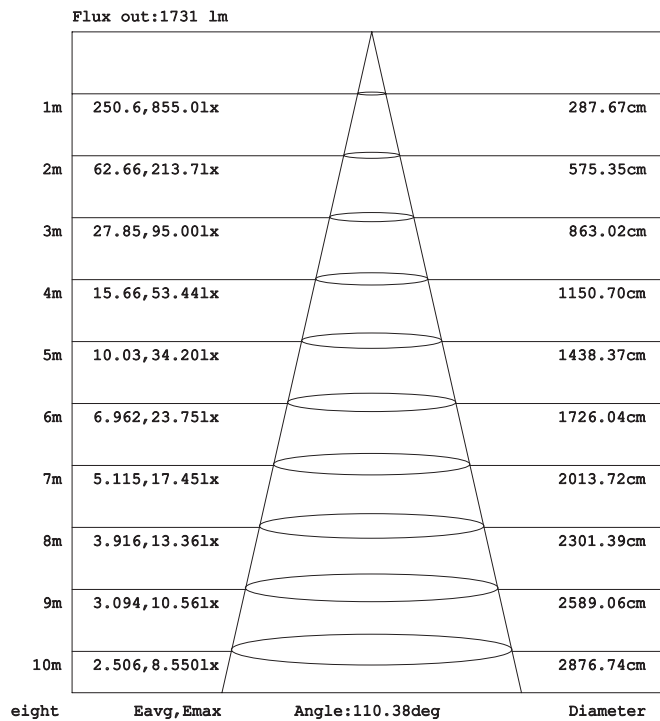


Model: NR-AL104L-20

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

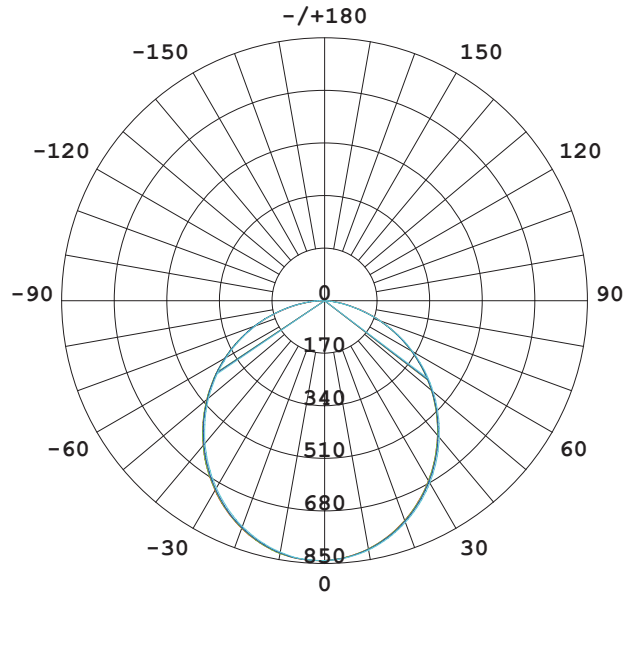


AVERAGE BEAM ANGLE (50%) : 108.8 DEG

Illuminance at a Distance

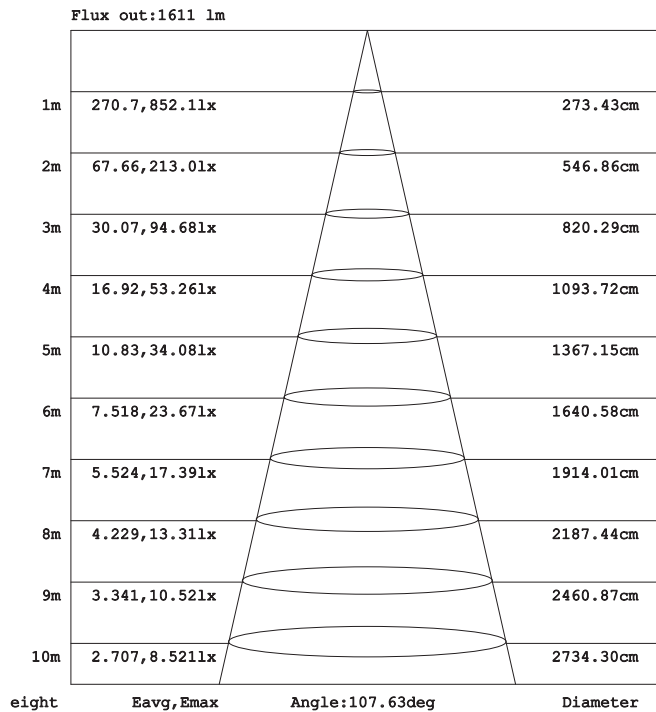


Model: NR-AL104T-20

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

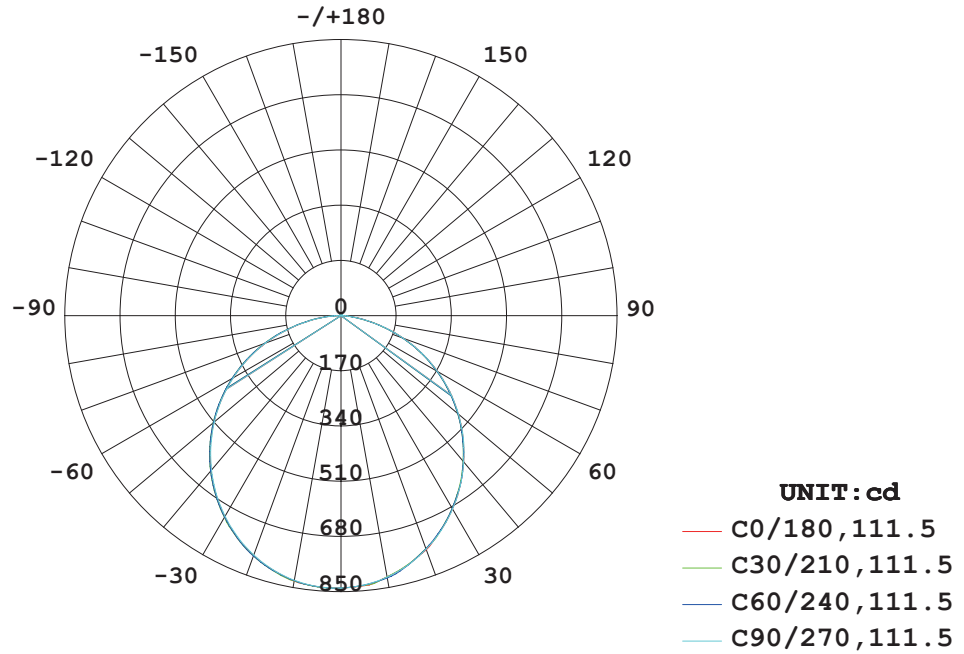


AVERAGE BEAM ANGLE (50%) : 111.5 DEG

Illuminance at a Distance

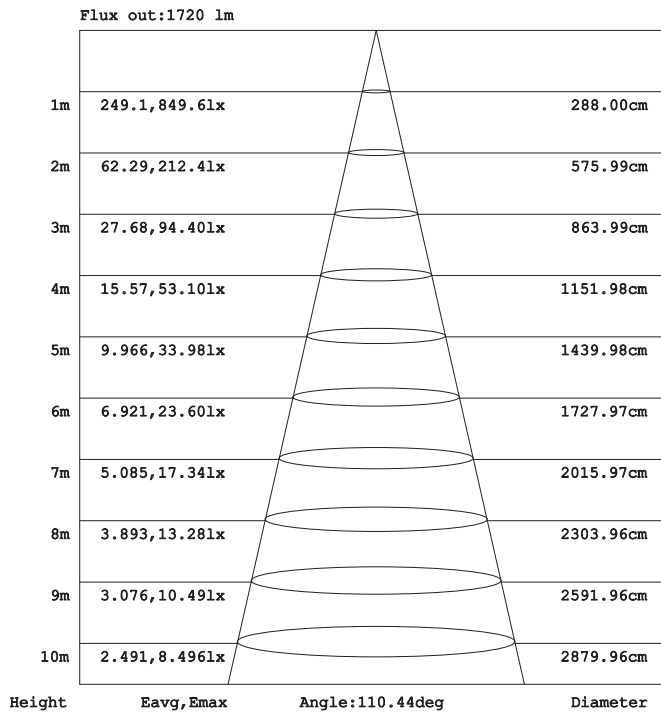


Model:NR-AL104X-20

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

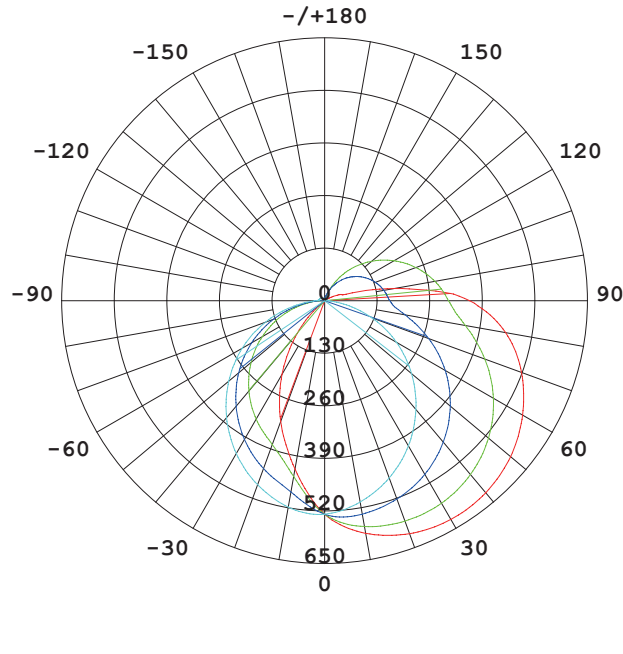

AVERAGE BEAM ANGLE (50%) : 120.0 DEG

Illuminance at a Distance

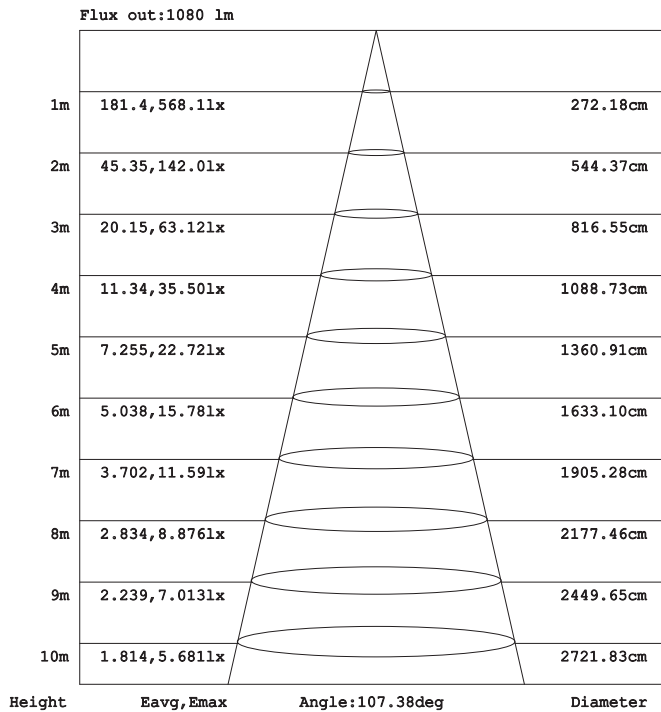

Model: NR-AL104WL-20

