




LED Downlight


NR-DL113-6 Series
IP20



Item Code	P (W)	CCT(K)	Beam angle	Output (lm)	lm/w	Dimensions in mm		kg
						A	B	
NR-DL113-6-10	6	3000	45°	426	71	Φ50	101	0.18
NR-DL113-6-20	6	3000	45°	426	71	Φ50	201	0.25
NR-DL113-6-30	6	3000	45°	426	71	Φ50	301	0.31

Dimensions in mm

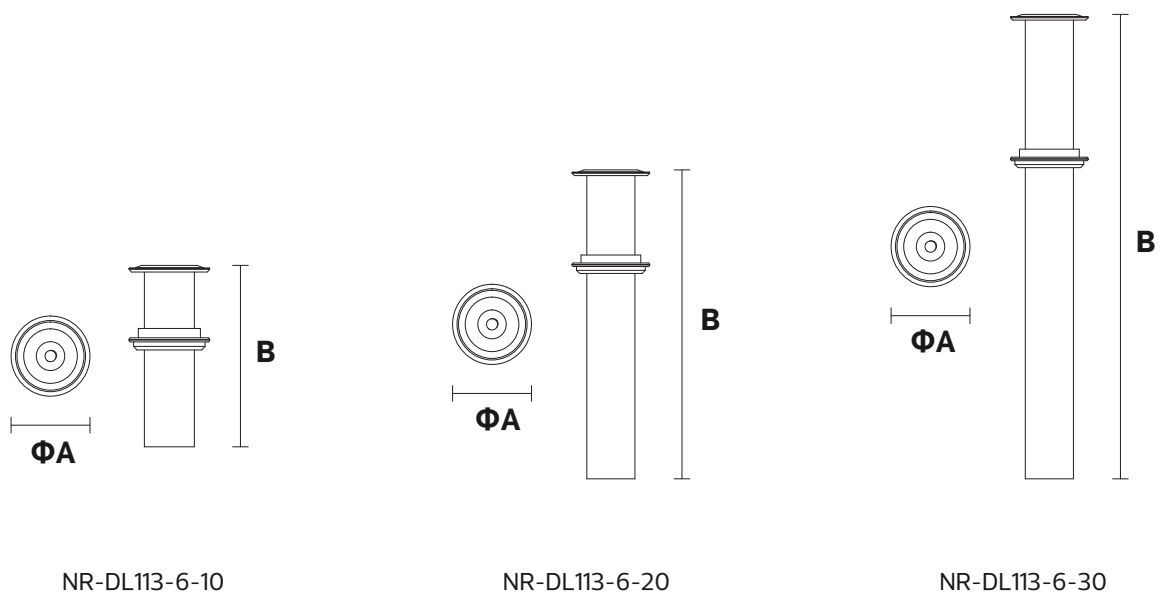

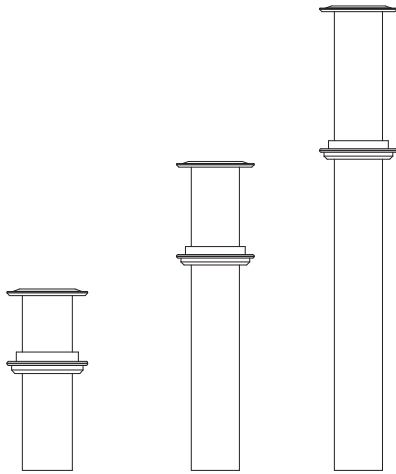

Description:

LED Downlight

Main material:



Die-cast aluminum+Engineering plastics

Specification


Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rendering, less heat, no UV or IR radiation
LED driver is included
IP20

Applications

- . Shopping mall
- . Office buildings
- . Exhibition hall

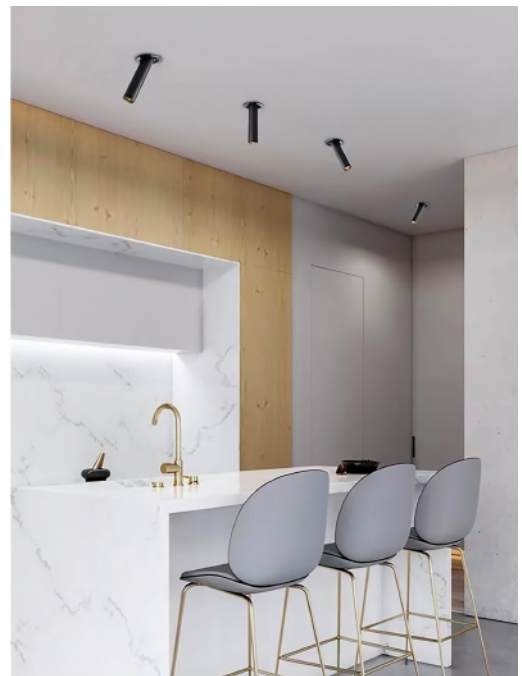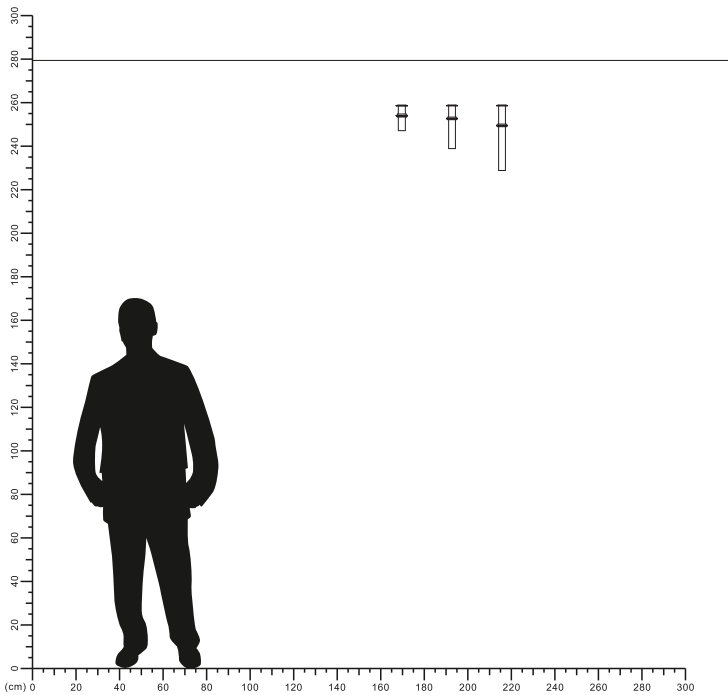

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

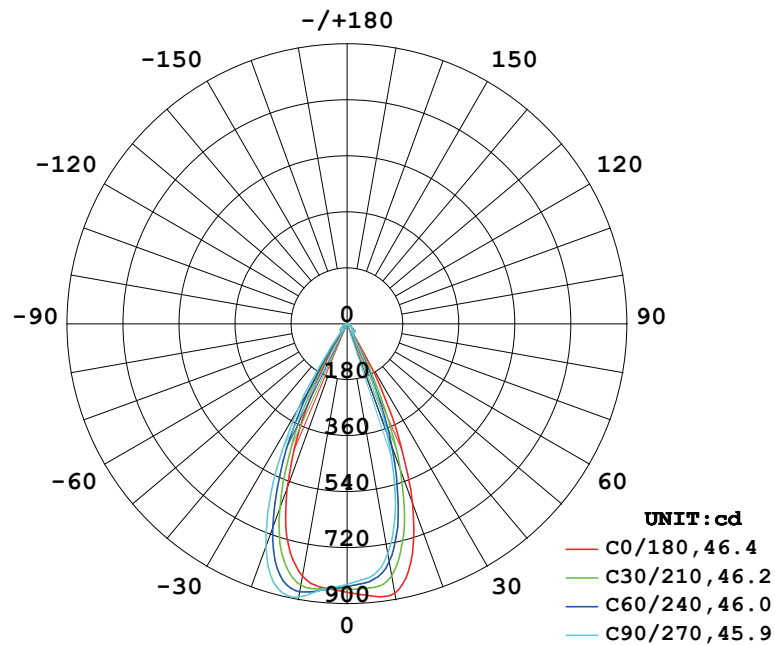

AVERAGE BEAM ANGLE (50%) : 46.1 DEG

Illuminance at a Distance

