

LED FLOOD LIGHT

NR-FL105-50



IP65





Outdoor	AC 100-240V	50/60 Hz	PF ≥0.9	CCT 3000K 4000K	Ra ≥80	IP65	Beam Angel 90°	Chips SMD	
---------	----------------	-------------	------------	-----------------------	-----------	------	----------------------	--------------	--

Item Code	P (W)	Beam angle	Output (lm)	lm/w	Dimensions in mm			kg
					A	B	C	
NR-FL105-50	50	90°	5360	107.2	285	82	105	0.82

Dimensions in mm

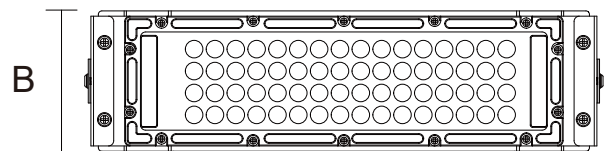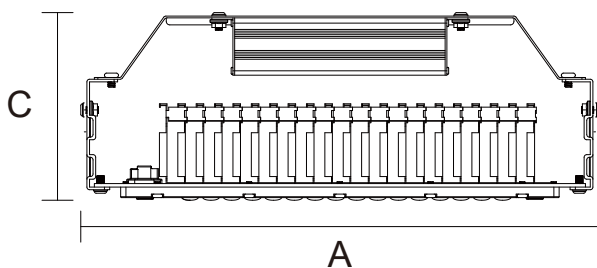

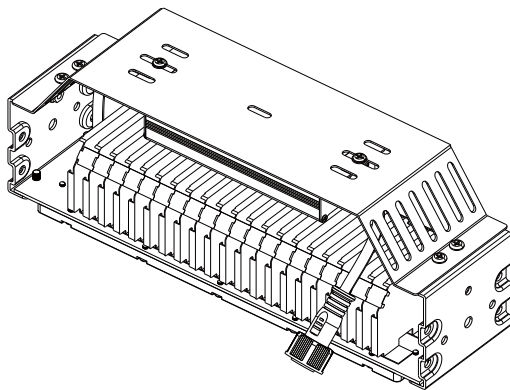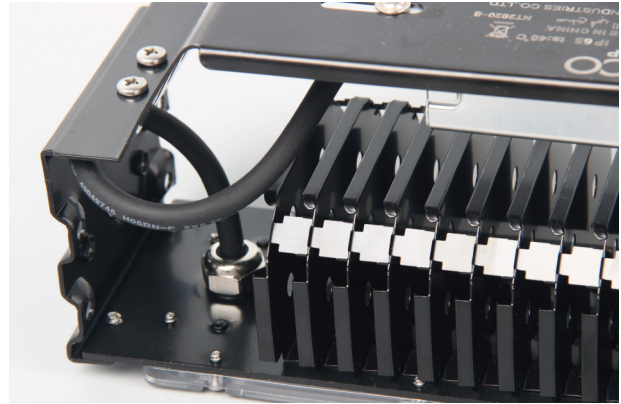


Description:
LED FLOOD LIGHT

Main material:
Die-cast aluminum+PC


Specification
Aviation aluminum shell, no corrosion, no rust, Glass lens, natural light without light spot, The base is firmly fixed and will not fall over
IP 65

Applications
. Park
. Square
. Corridor
. Tunnel

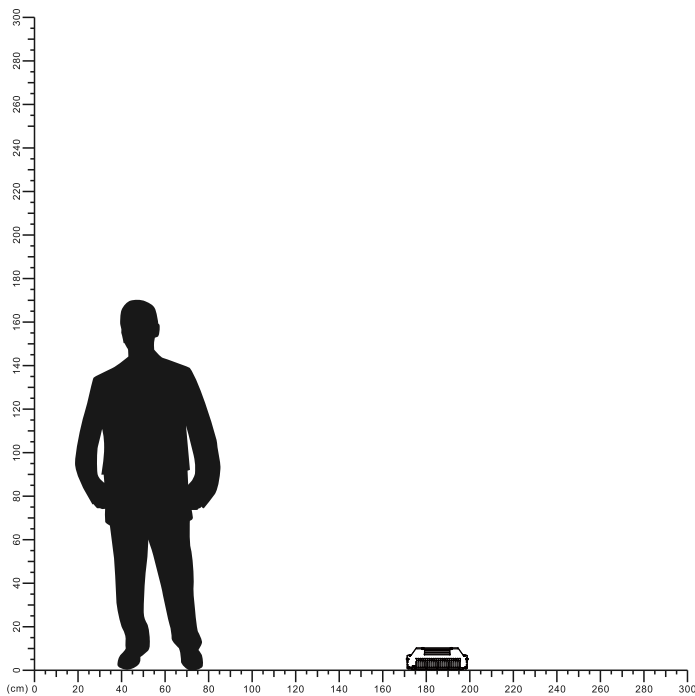


Item Code	Dimensions in mm			
	A	B	C	
NR-FL105-Plug-1-2	550	Φ18	45	0.09


Dimensions in mm

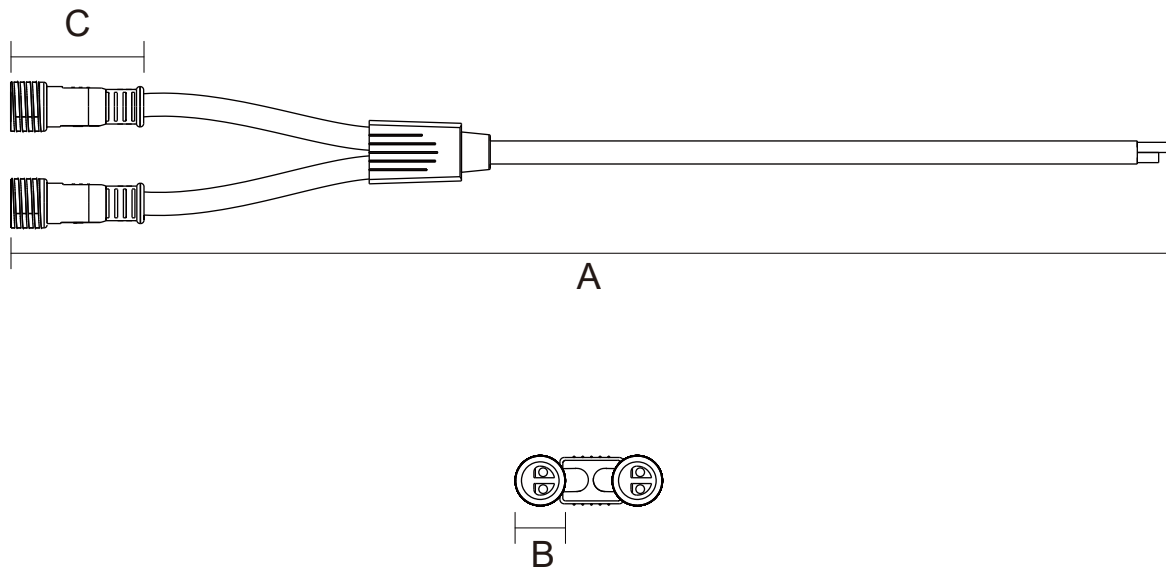


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

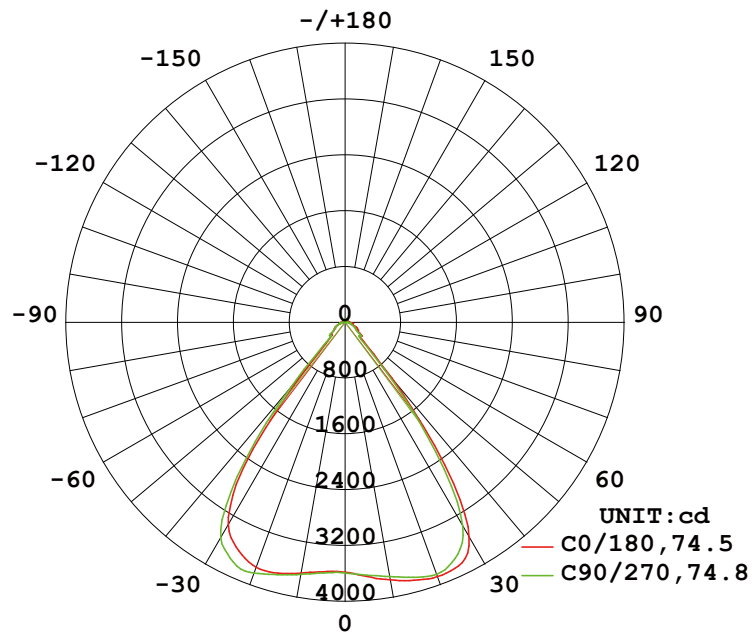


Illuminance at a Distance

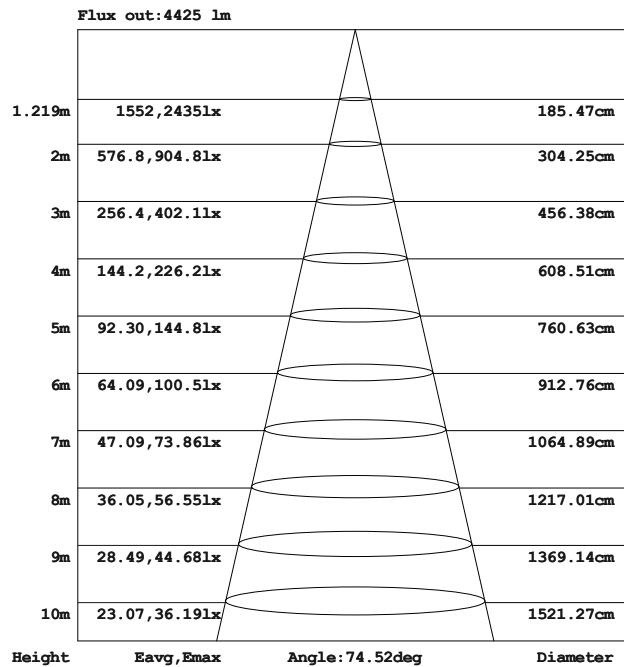

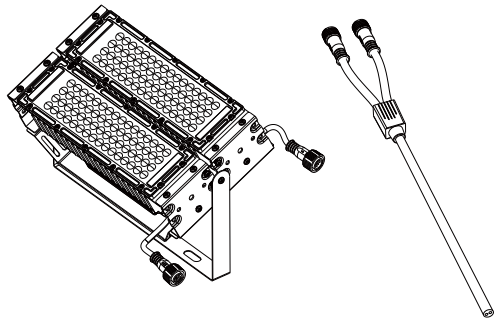

1

Turn off the power

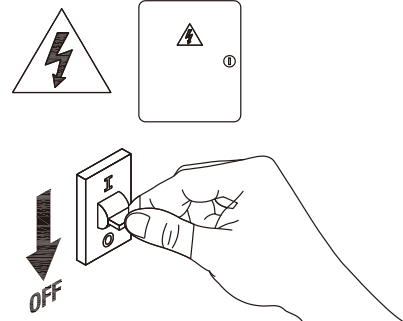


2

Punch two holes in the ground




3

Install on the ground with two screws

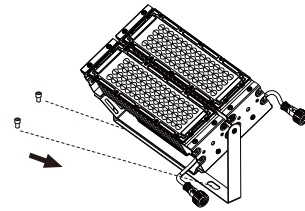


4

Installation completed on the ground




5

Connecting cable

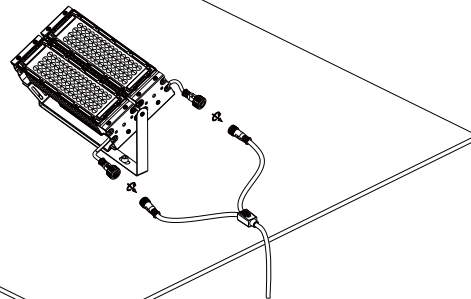

6

installation completed

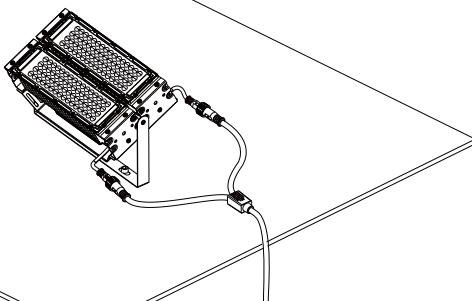

7

Turn on the power

