

LED Outdoor Flood Lamp

NR-FL106 Series


IP65




Outdoor 	AC 220-240V	50/60 Hz	PF ≥0.8	CCT 3000K 4000K 6500K	Ra ≥80	IP65	Beam Angel 36°	Chips SMD	
--------------------	-----------------------	--------------------	-------------------	---------------------------------------	------------------	-------------	------------------------------------	----------------------------	--

Item Code	P (W)	Beam angle	Output (lm)	lm/w	Dimensions in mm			
					A	B	C	
NR-FL106-24	24	36°	1776	74	134	115	150	1.0
NR-FL106-40	40	36°	2960	74	181	125	177	1.8
NR-FL106-70	70	36°	5180	74	220	140	220	2.75


Dimensions in mm

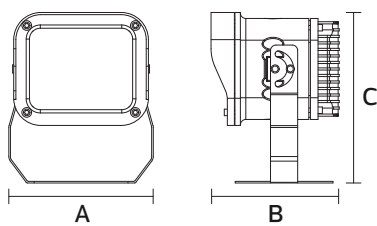


NR-FL106-24

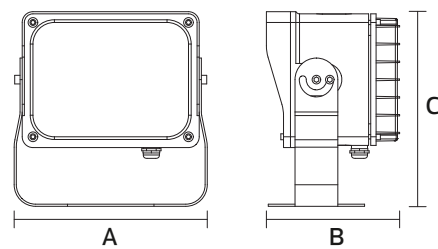

NR-FL106-40

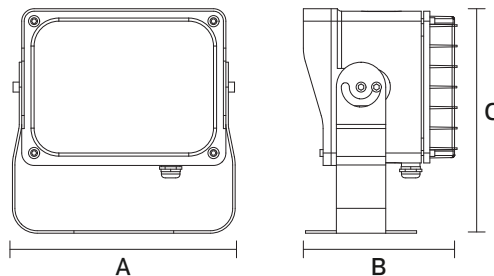

NR-FL106-70

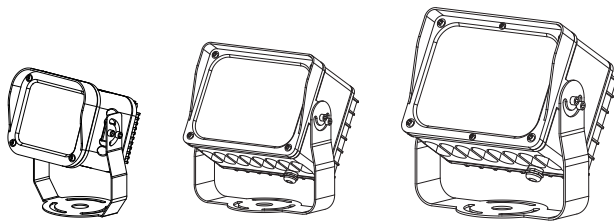

Description:

LED Outdoor Flood Lamp

Main material:

Die-cast aluminum+ PMMA



Specification

Aviation aluminum shell, no corrosion, no rust, Glass lens, natural light without light spot, The base is firmly fixed and will not fall over


IP 65

Applications

- . Park
- . Square
- . Corridor

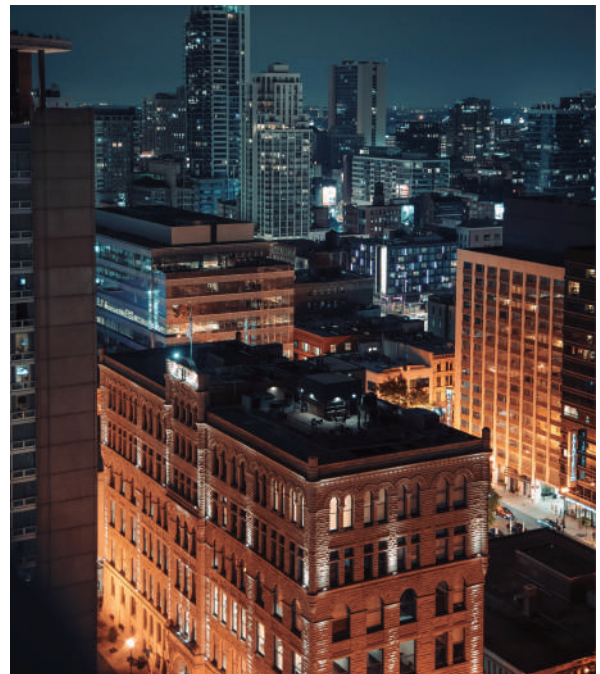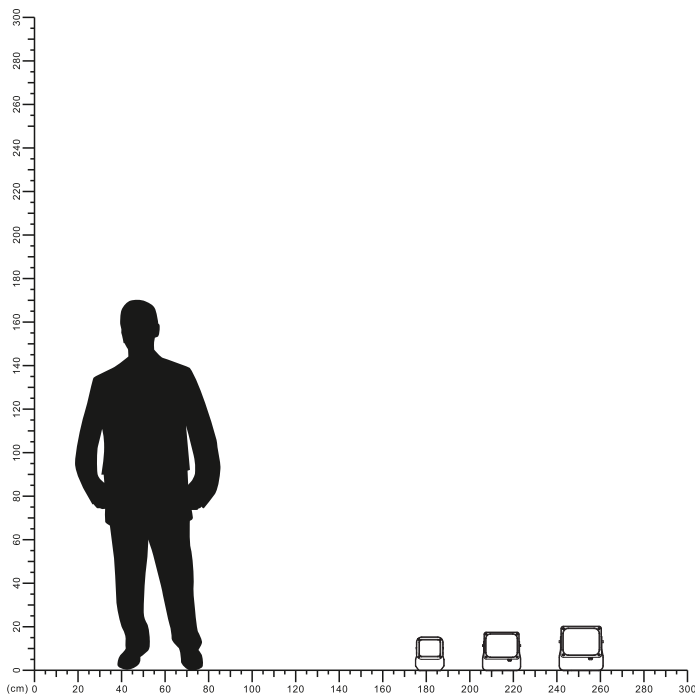


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

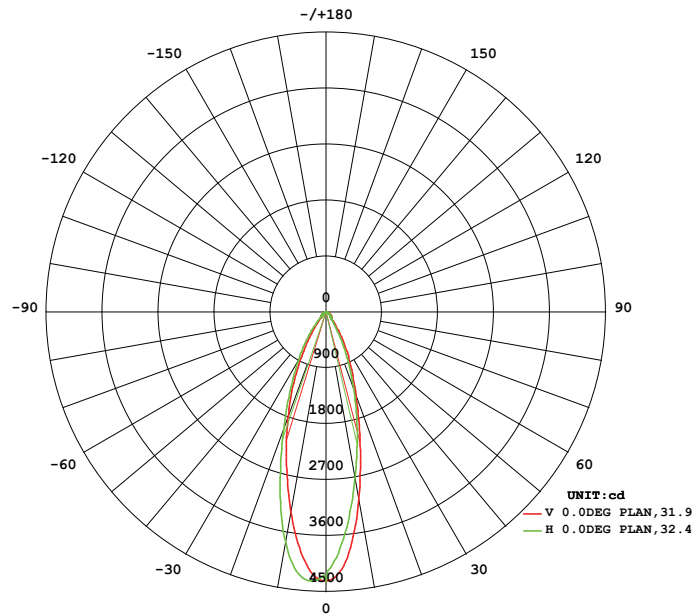


AVERAGE BEAM ANGLE (50%) : 32.2 DEG

Illuminance at a Distance

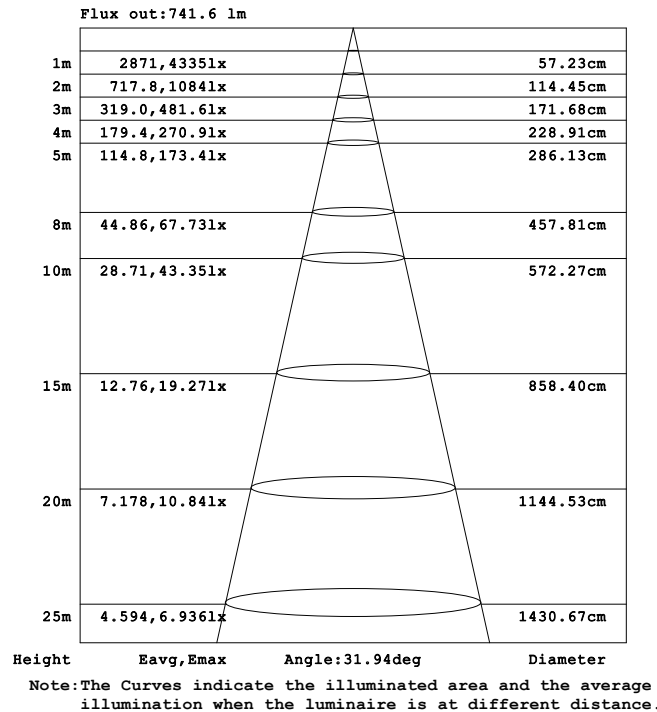


Model: NR-FL106-24

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

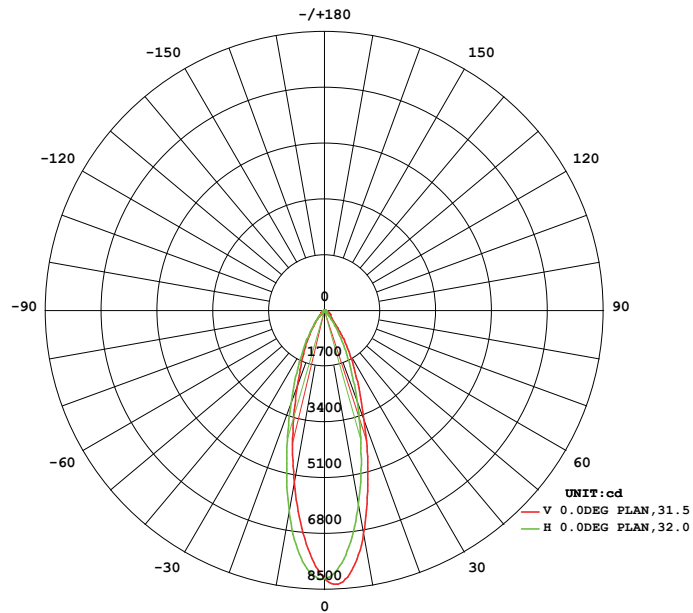


AVERAGE BEAM ANGLE (50%) : 31.7 DEG

Illuminance at a Distance

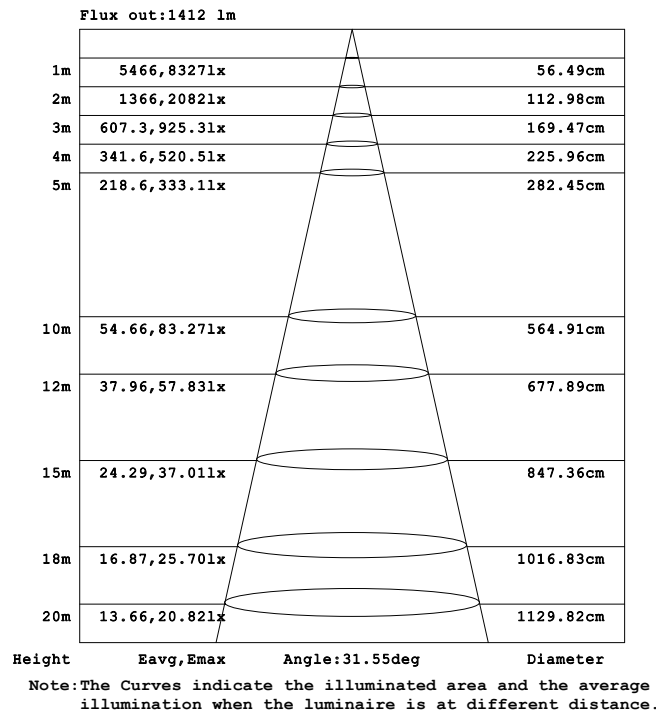


Model:NR-FL106-40

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

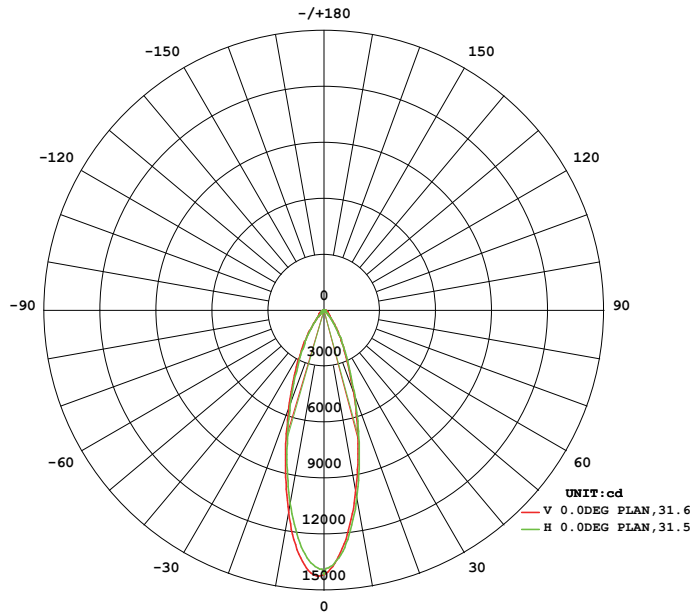


AVERAGE BEAM ANGLE (50%) : 31.5 DEG

Illuminance at a Distance

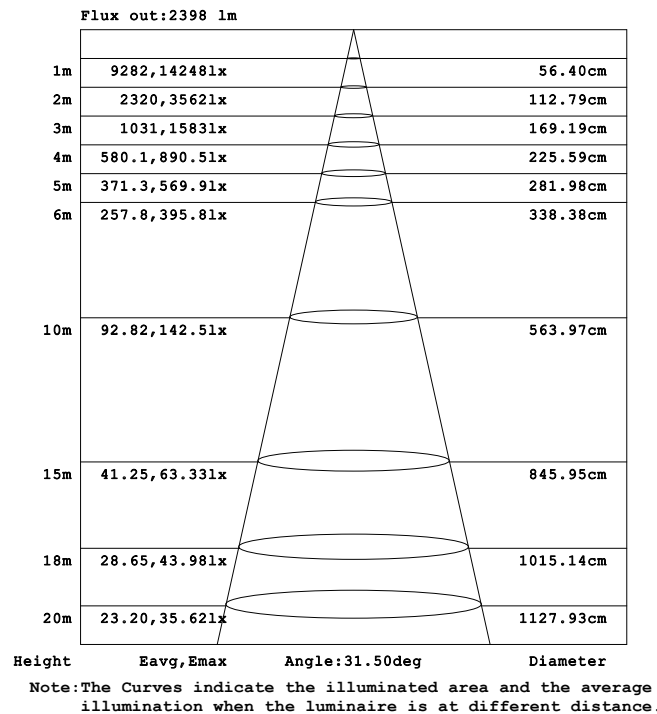


Model: NR-FL106-70




1

Turn off the power

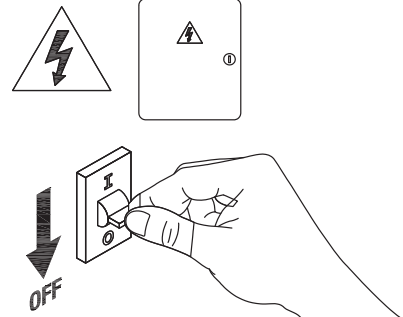


2

Punch three holes in the ground




3

Install on the ground with three screws




4

Installation completed on the ground

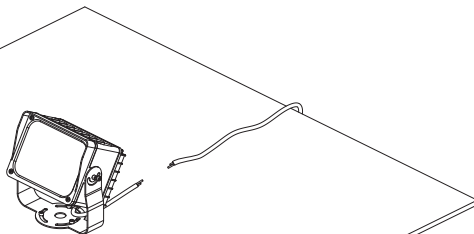


5

Connecting cable

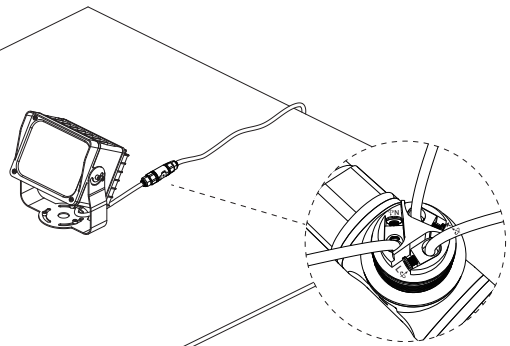

6

installation completed



7

Turn on the power

