



LED Outdoor Flood Lamp



NR-FL106 Series

IP65





| Item Code | P (W) | Beam angle | Output (lm) | lm/w | Dimensions in mm | | | kg |
|-------------|-------|------------|-------------|------|------------------|-----|-----|------|
| | | | | | A | B | C | |
| NR-FL106-24 | 24 | 36° | 1776 | 74 | 134 | 115 | 150 | 1.0 |
| NR-FL106-40 | 40 | 36° | 2960 | 74 | 181 | 125 | 177 | 1.8 |
| NR-FL106-70 | 70 | 36° | 5180 | 74 | 220 | 140 | 220 | 2.75 |



Dimensions in mm




NR-FL106-24



NR-FL106-40



NR-FL106-70

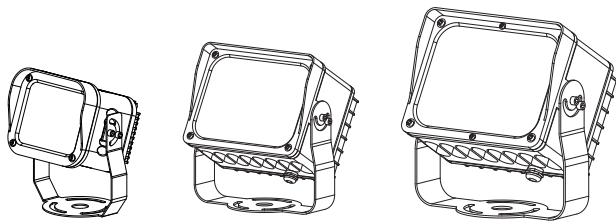



Description:
LED Outdoor Flood Lamp

Main material:
Die-cast aluminum+ PMMA


Specification
Aviation aluminum shell, no corrosion, no rust, Glass lens, natural light without light spot, The base is firmly fixed and will not fall over
IP 65

Applications

- . Park
- . Square
- . Corridor

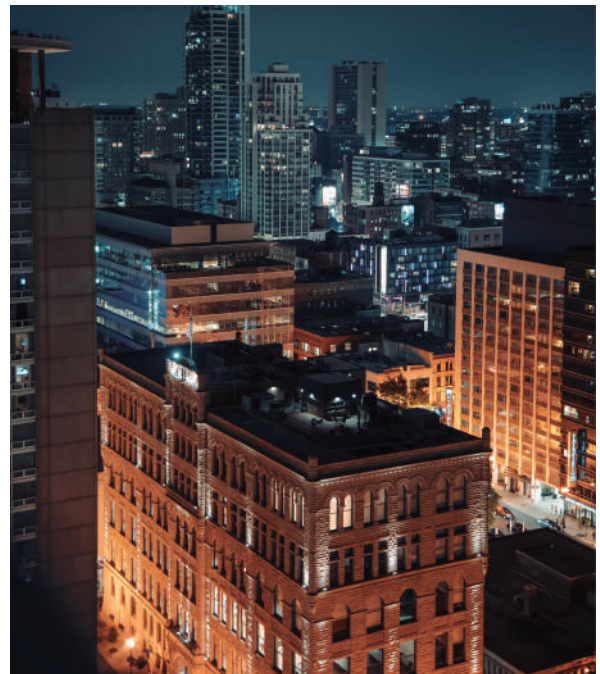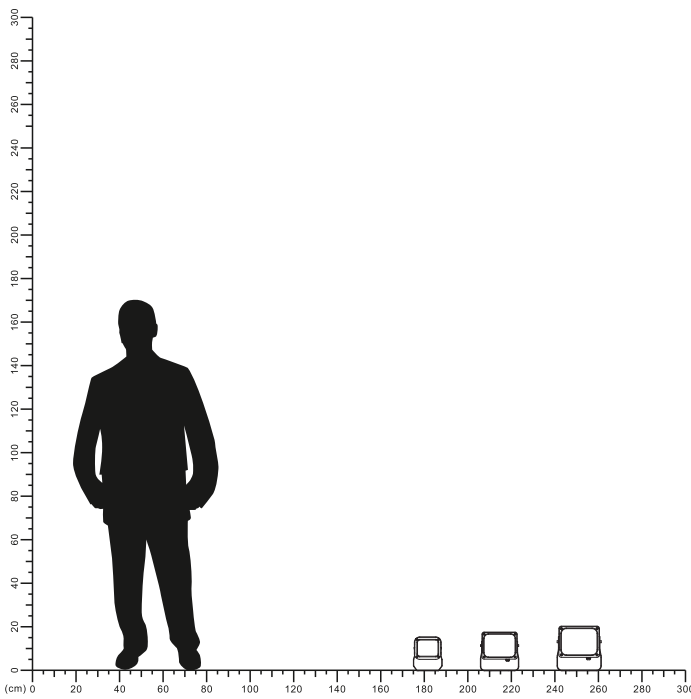


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

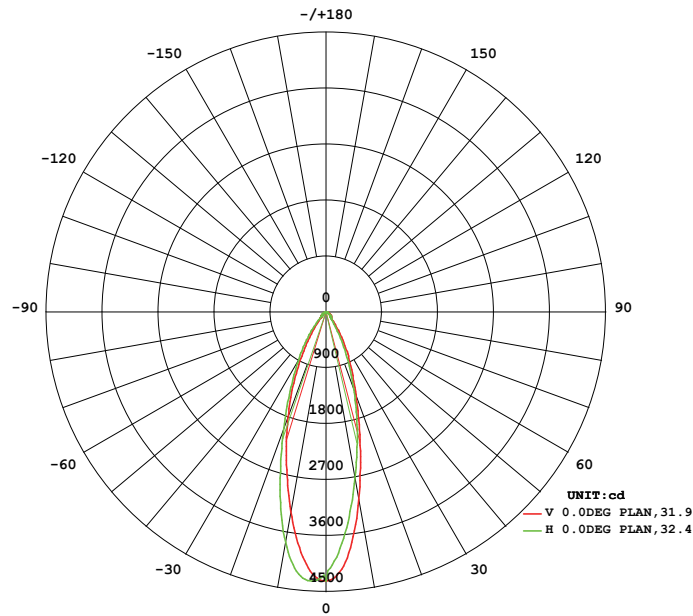


AVERAGE BEAM ANGLE (50%) : 32.2 DEG

Illuminance at a Distance

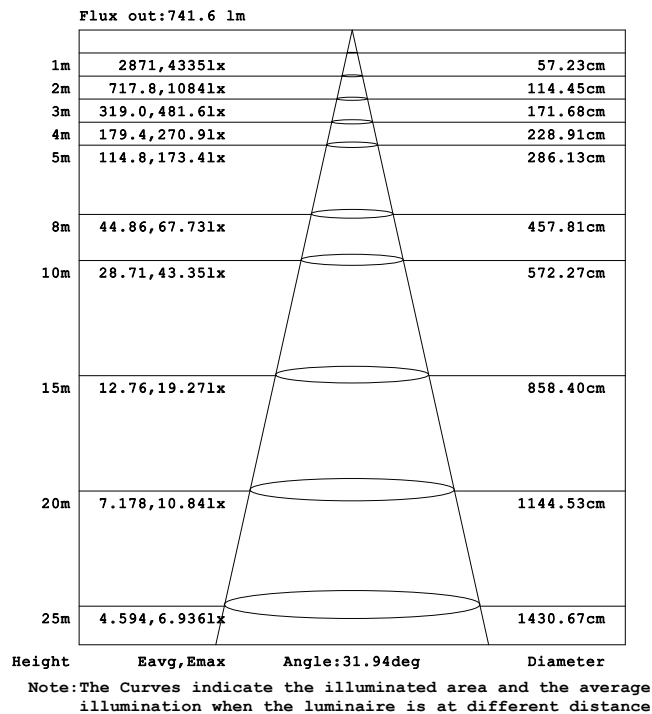


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

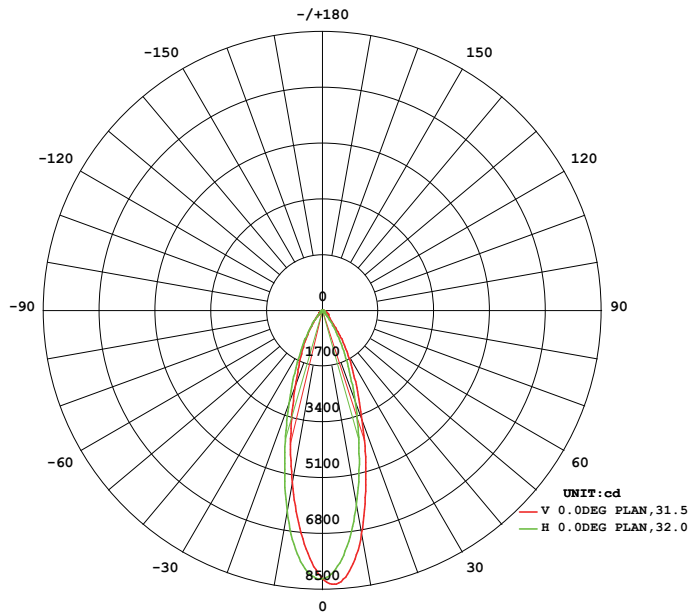


AVERAGE BEAM ANGLE (50%) : 31.7 DEG

Illuminance at a Distance

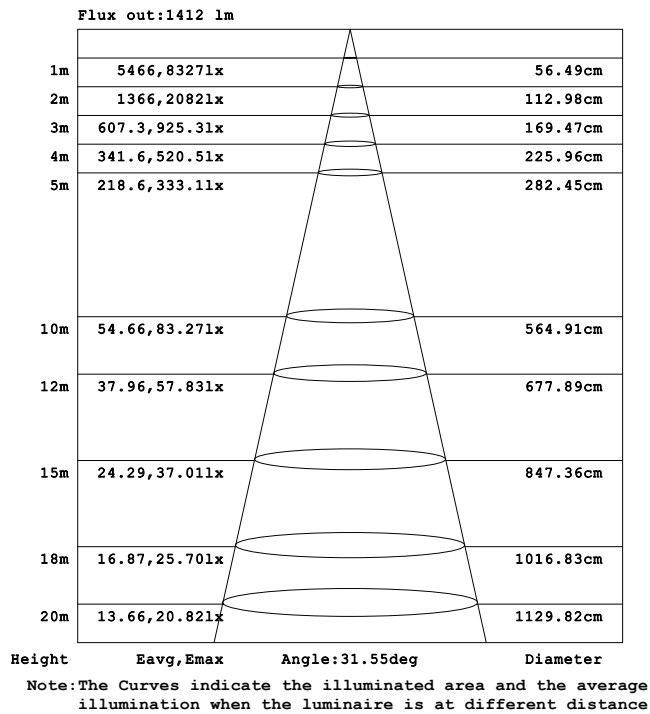


Model:NR-FL106-40

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

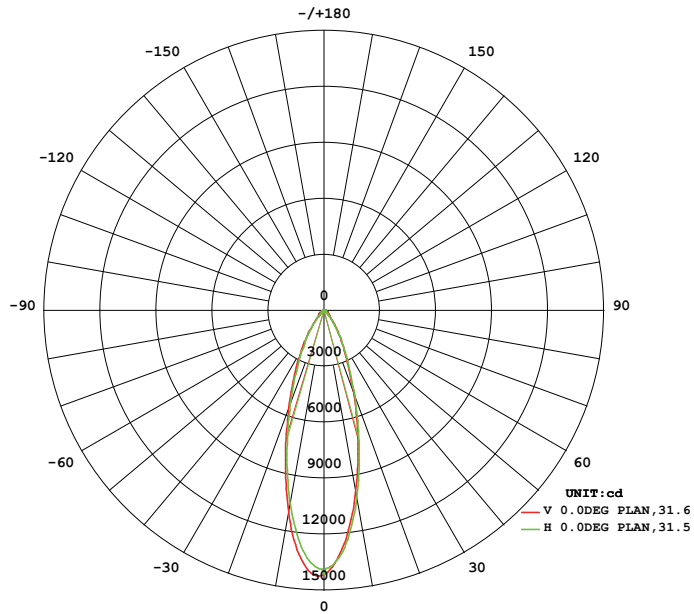

AVERAGE BEAM ANGLE (50%) : 31.5 DEG

Illuminance at a Distance

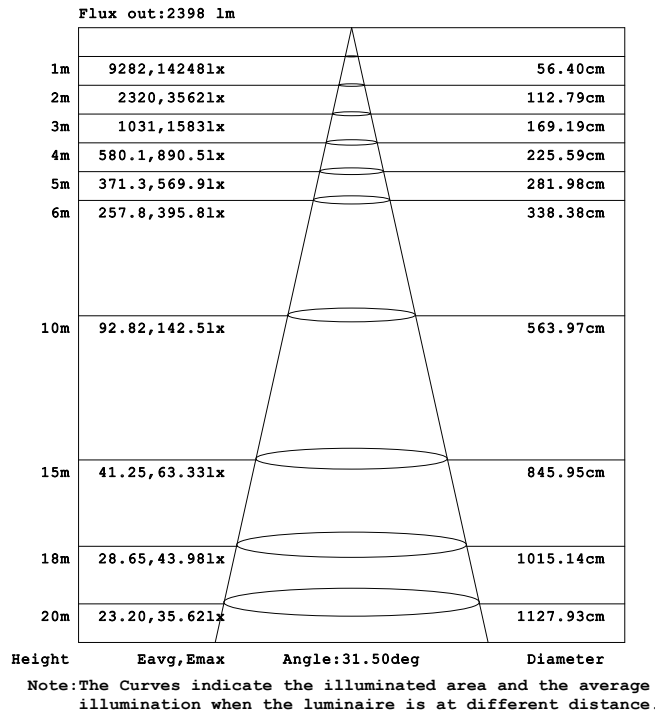

Model:NR-FL106-70

