






LED AR111


NR-AR111-30 Series
IP20



Model No	P(W)	CCT(K)	Output (lm)	lm/w	Beam Angle	Color	Dimensions in mm		
							A	B	
NR-IRDL0101-30-30K-SL-45D	30	3000	2970	99	45°	Silver	Φ111	67	0.45
NR-AR111-30 S W	30	6500	2700	90	45°	Silver	Φ111	67	0.45
NR-AR111-30 WW	30	3000	2970	99	90°	Silver	Φ111	67	0.45
NR-AR111-30 DW	30	4000	3300	110	90°	Silver	Φ111	67	0.45
NR-AR111S-30	30	6500	2700	90	90°	Silver	Φ111	67	0.45

Dimensions in mm

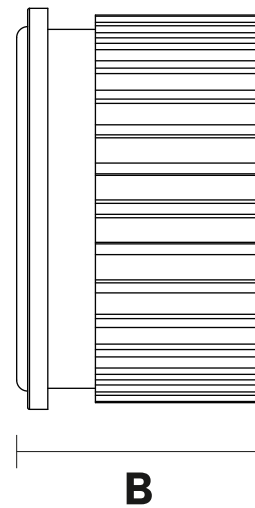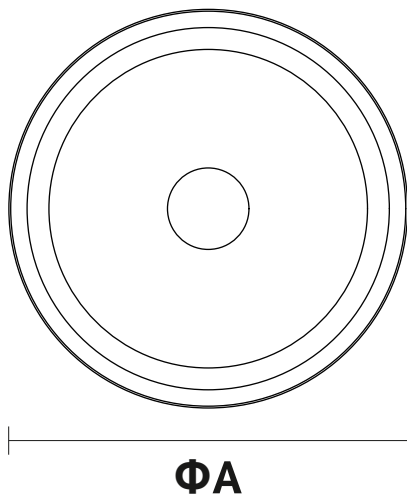

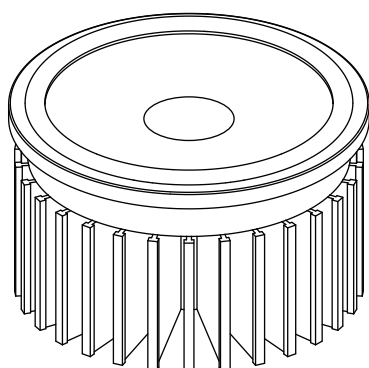

Description:

LED AR111

Main material:


Aluminum+Pc

Specification


Aluminum lamp body integrated die-casting molding, spraying process, fine work, waterproof and dustproof. High light transmission Pc material lamp shade, bright and not dazzling, anti-aging, long service life. IP20

Applications


- . Shopping mall
- . Office buildings
- . Exhibition hall

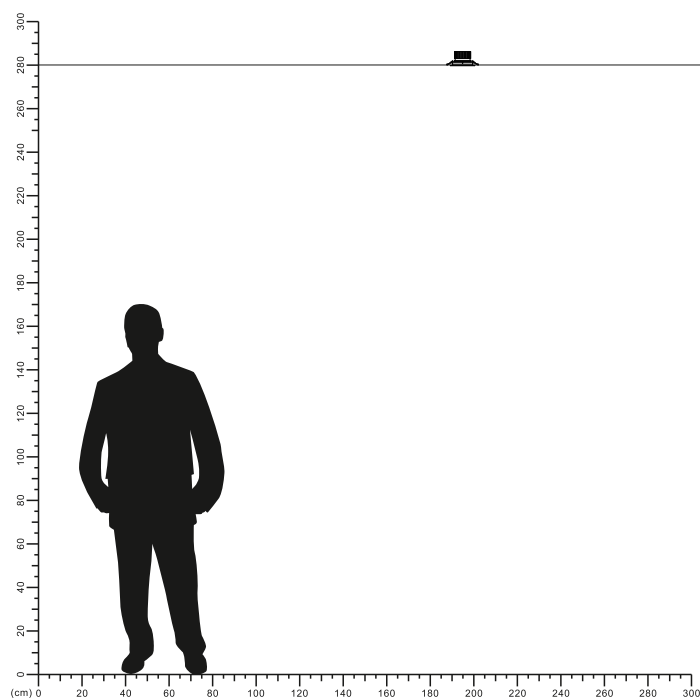

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

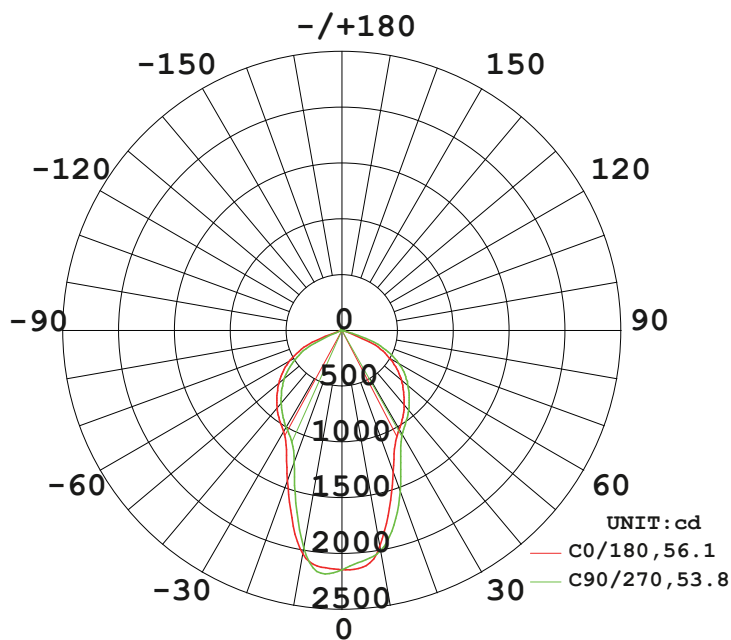


Illuminance at a Distance

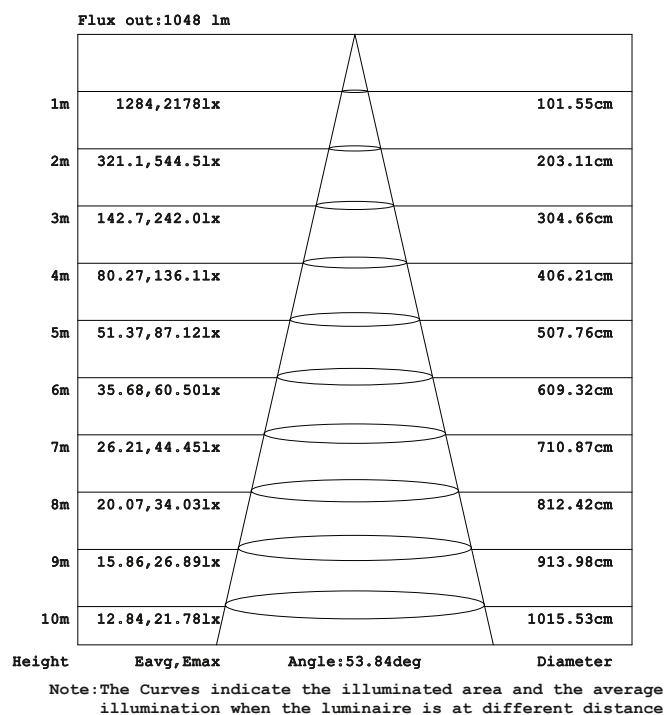


Model No: NR-IRDL0101-30
Model No: NR-AR111-30 S W

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

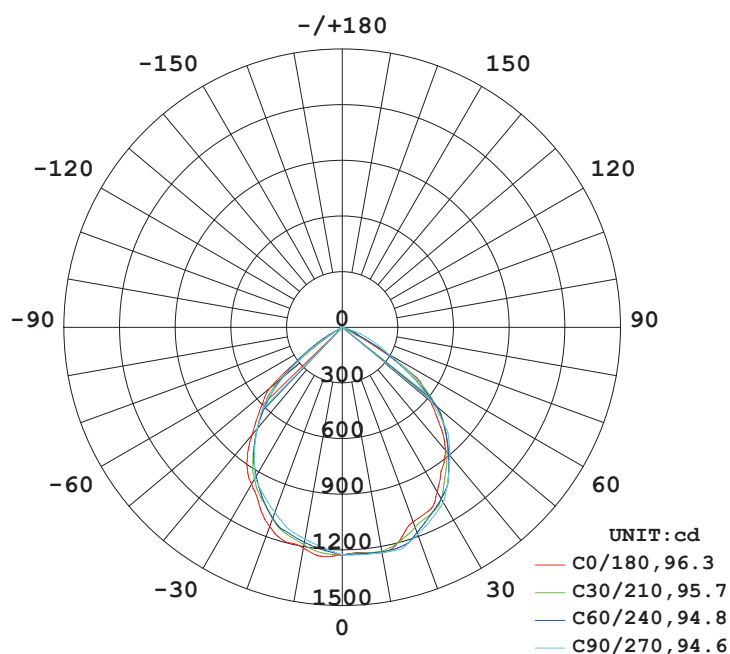

AVERAGE BEAM ANGLE (50%) : 95.4 DEG

Illuminance at a Distance

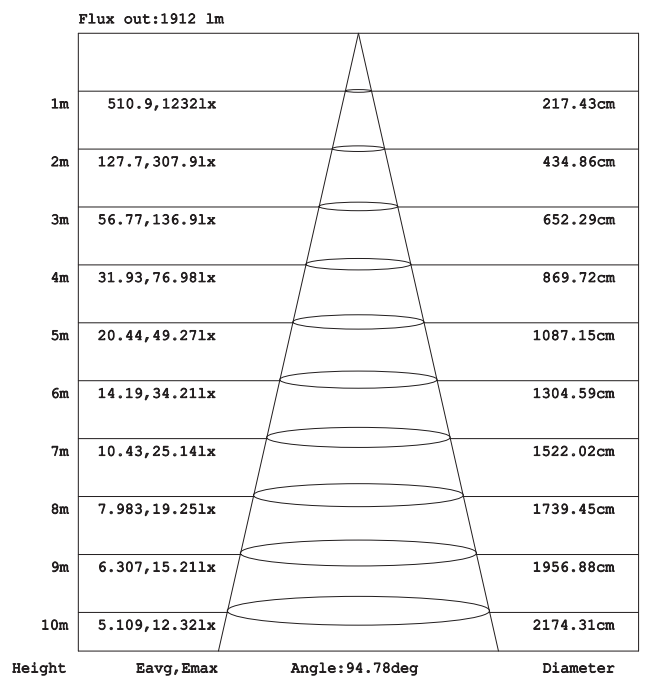

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Model No:NR-AR111-30 WW
Model No:NR-AR111-30 DW
Model No:NR-AR111S-30

