






MINI LED DOWNLIGHT

NR-IRDL0101 Series
IP20

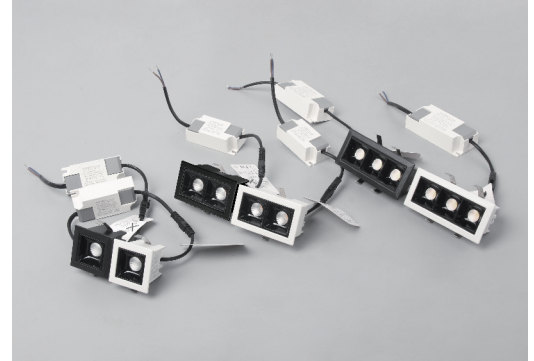


Model No	P(W)	PF	Output (lm)	lm/w	Beam Angle	Color	Hole Size (mm)	Dimensions in mm			
								A	B	C	
NR-SL101-3 WW	3	>0.4	249	83	36°	Black	36×36	44	44	40	0.08
NR-IRDL0101-3-30K-WH-36D	3	>0.4	249	83	36°	White	36×36	44	44	40	0.08
NR-IRDL0101-6-30K-BK-30D	6	>0.7	414	69	30°	Black	36×68	75	44	43	0.13
NR-SL101-6 WW	6	>0.7	414	69	30°	White	36×68	75	44	43	0.13
NR-IRDL0101-9-30K-BK-36D	9	>0.7	810	90	36°	Black	36×85	95	44	40	0.15
NR-IRDL0101-9-30K-WH-36D	9	>0.7	810	90	36°	White	36×85	95	44	40	0.15


Dimensions in mm

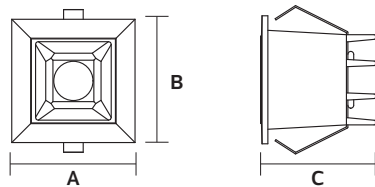


Model No:NR-SL101-3 WW
Model No:NR-IRDL0101-3-30K-WH-36D

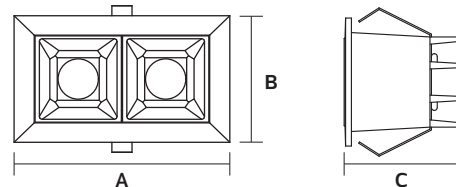

Model No:NR-IRDL0101-6-30K-BK-30D
Model No:NR-SL101-6 WW

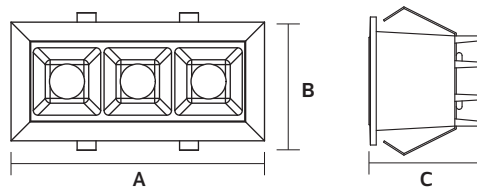

Model No:NR-IRDL0101-9-30K-BK-36D
Model No:NR-IRDL0101-9-30K-WH-36D

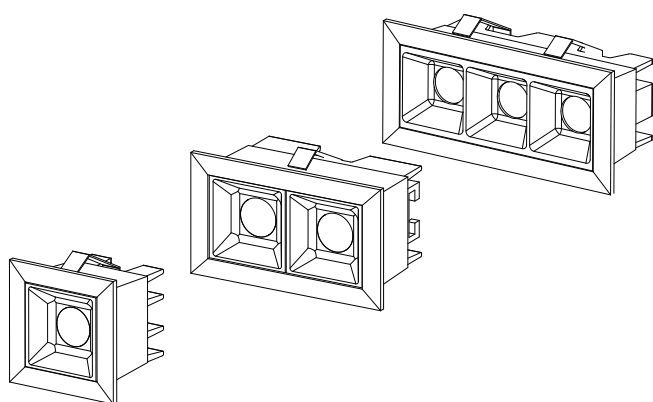

Description:

MINI LED DOWNLIGHT

Main material:


Aluminum+Pc

Specification


Aluminum lamp body integrated die-casting molding, spraying process, fine work, waterproof and dustproof. High light transmission Pc material lamp shade, bright and not dazzling, anti-aging, long service life. IP20

Applications


- . Shoping mall
- . Office buildings
- . Exhibition hall

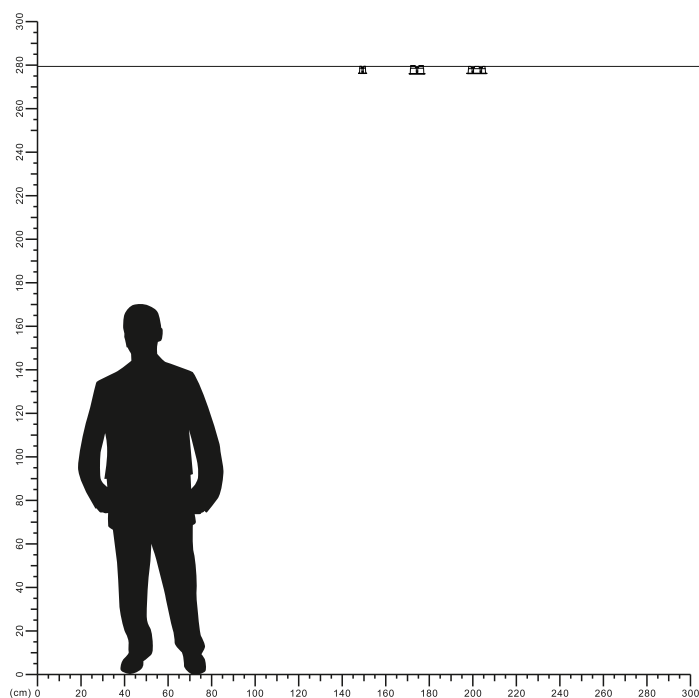

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

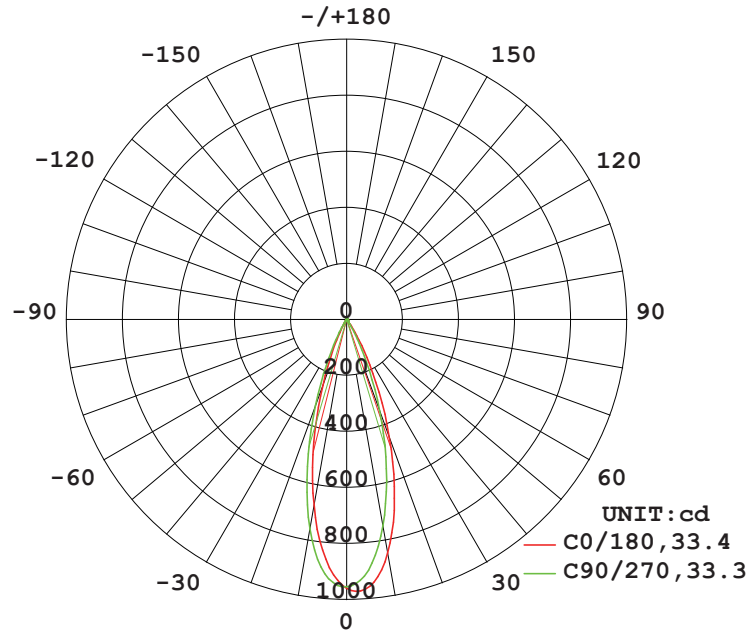


Illuminance at a Distance

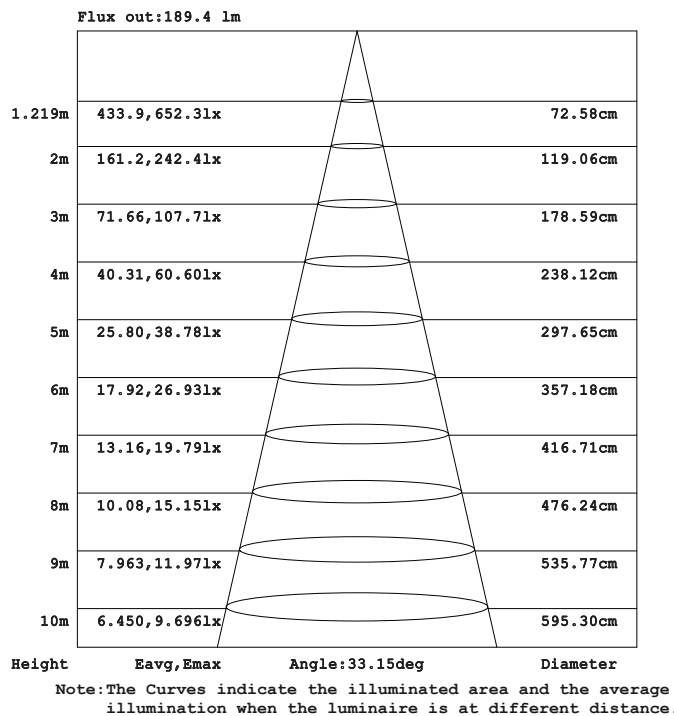


Model No: NR-SL101-3
Model No: NR-IRDL0101-3

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

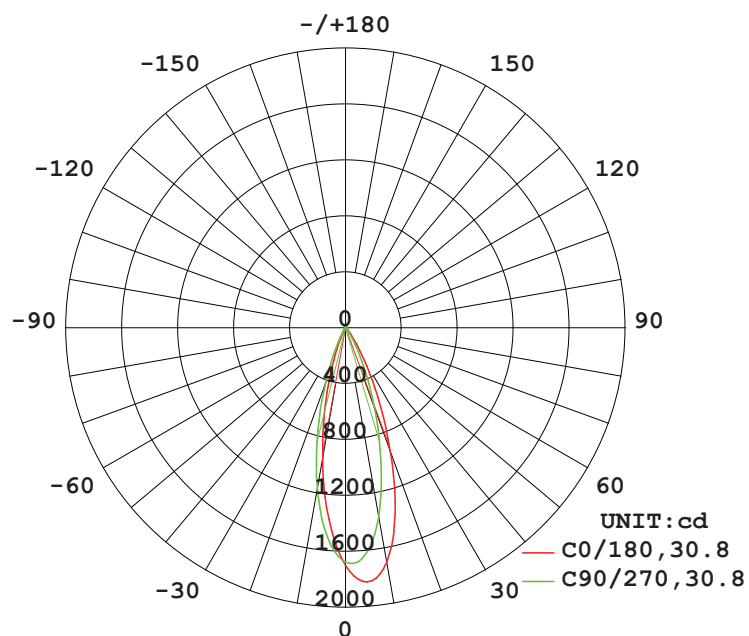

AVERAGE BEAM ANGLE (50%) : 30.8 DEG


Illuminance at a Distance

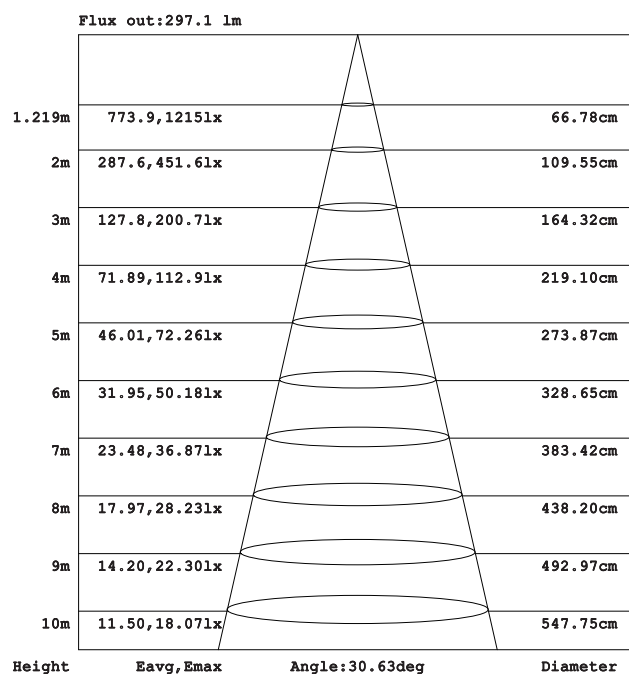

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


Model No: NR-IRDL0101-6
Model No: NR-SL101-6

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

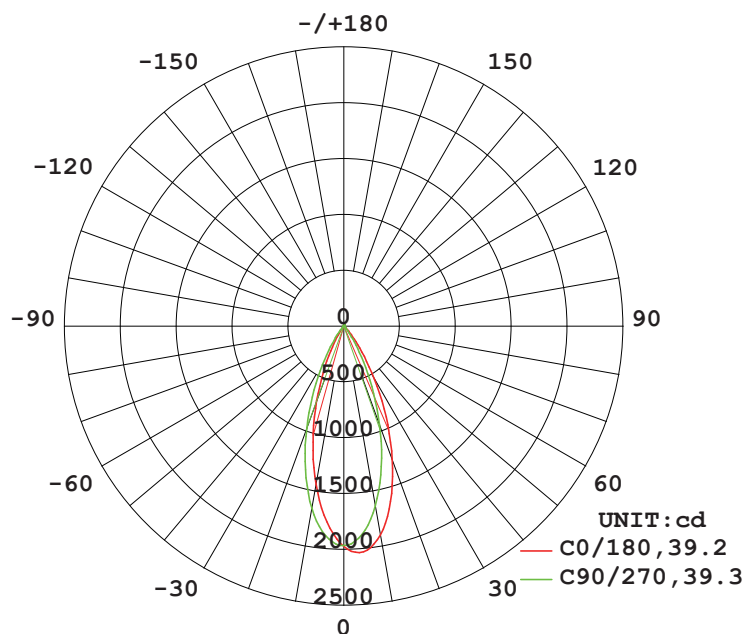



AVERAGE BEAM ANGLE (50%) : 39.3 DEG

Illuminance at a Distance

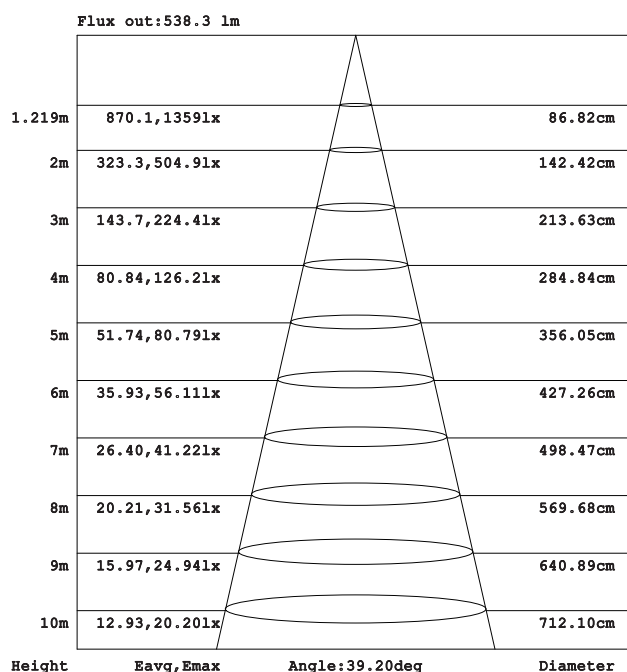


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Model No: NR-IRDL0101-9

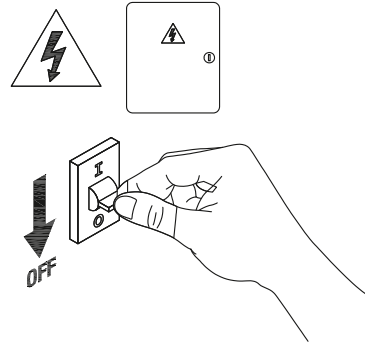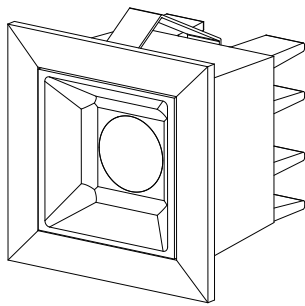


1

Turn off The Power

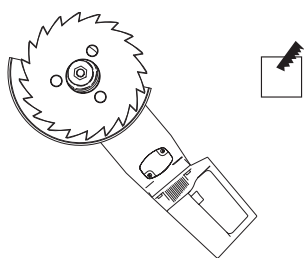


2

Cutting holes in and ceilings

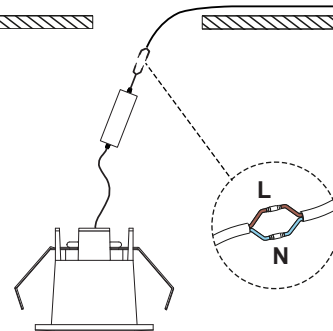


3

Connecting the cable

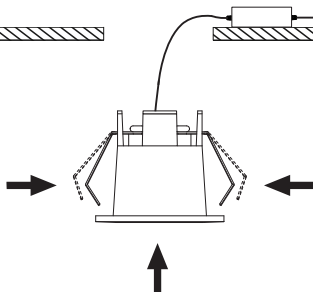


4

Put the lamp in to the ceiling

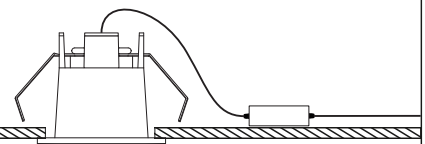

5

Installation completed

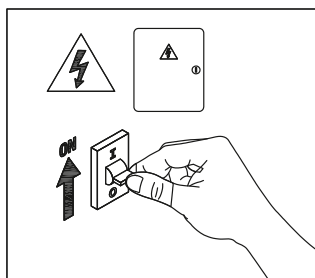

6

Turn on the power

