





LED Downlight

NR-DL113-6 Series
IP20




Model No	P(W)	CCT(K)	Beam angle	Output (lm)	Color	Dimensions in mm		kg
						A	B	
NR-IRDL0104-6-30K-BK-45D	6	3000	45°	426	Black	Φ50	101	0.18
NR-IRDL0104-6-30K-WH-45D	6	3000	45°	426	White	Φ50	101	0.18
NR-IRDL0103-6-30K-BK-45D	6	3000	45°	426	Black	Φ50	201	0.25
NR-IRDL0103-6-30K-WH-45D	6	3000	45°	426	White	Φ50	201	0.25
NR-IRDL0102-6-30K-BK-45D	6	3000	45°	426	Black	Φ50	301	0.31
NR-IRDL0102-6-30K-WH-45D	6	3000	45°	426	White	Φ50	301	0.31


Dimensions in mm




NR-IRDL0104-6-30K Series



NR-IRDL0103-6-30K Series

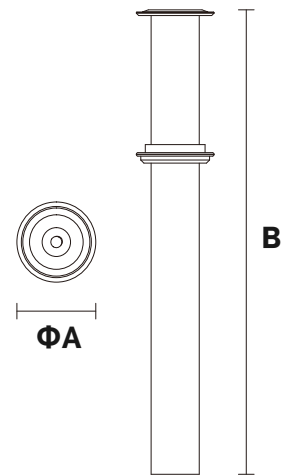

NR-IRDL0102-6-30K Series

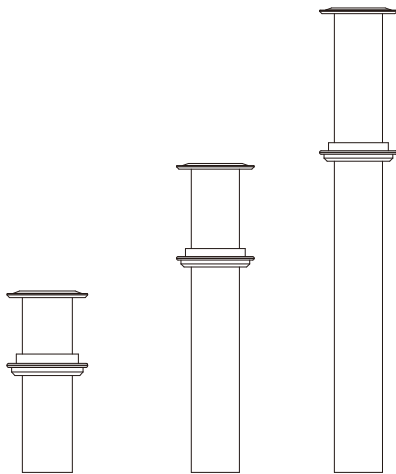

Description:

LED Downlight

Main material:



Aluminum +PC

Specification


Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rendering, less heat, no UV or IR radiation
LED driver is included
IP20

Applications

- . Shopping mall
- . Office buildings
- . Exhibition hall

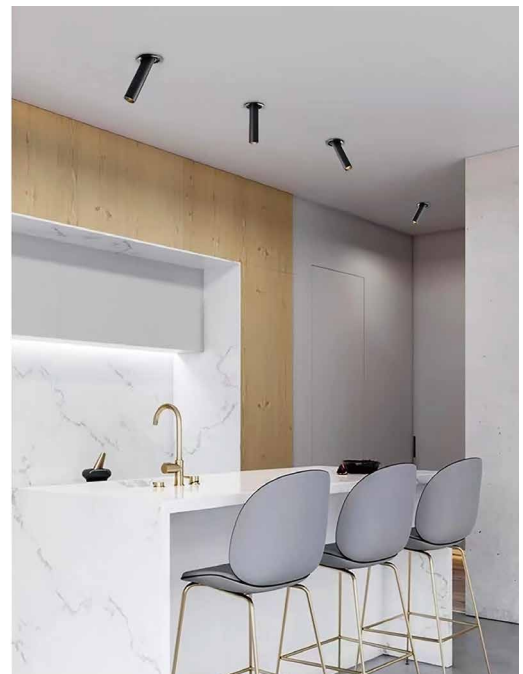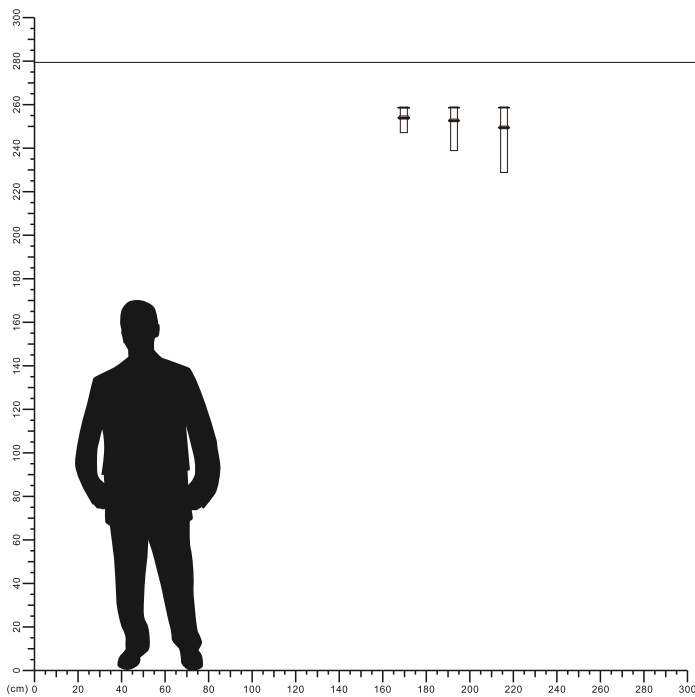

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

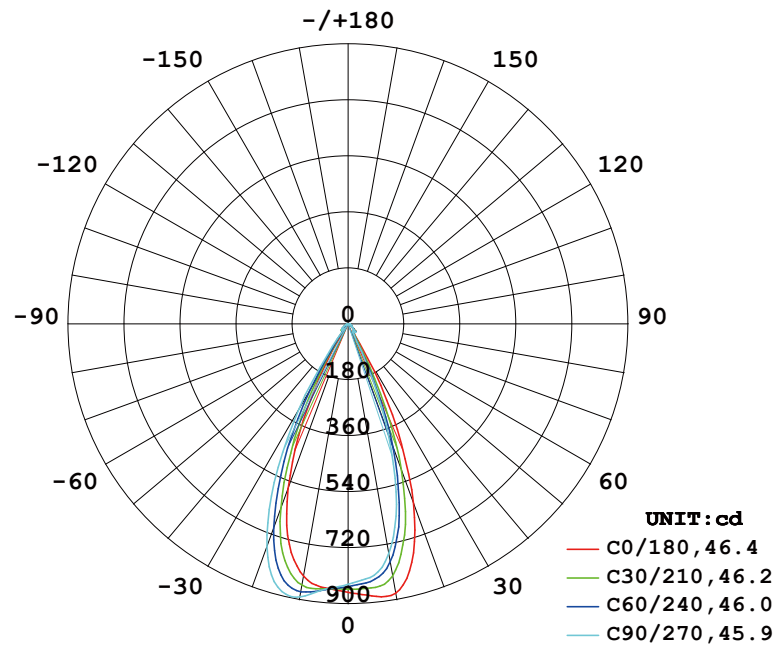

AVERAGE BEAM ANGLE (50%) : 46.1 DEG

Illuminance at a Distance

