






MINI LED DOWNLIGHT


NR-IRDL0201-3-30K Series
IP20



Model No	P(W)	PF	Output (lm)	lm/w	Beam Angle	Color	Hole Size (mm)	Dimensions in mm		kg
								A	B	
NR-IRDL0201-3-30K-BK-60D	3	>0.4	195	65	60°	Black	Φ36	Φ40	65	0.09
NR-IRDL0201-3-30K-WH-60D	3	>0.4	195	65	60°	White	Φ36	Φ40	65	0.09

Dimensions in mm

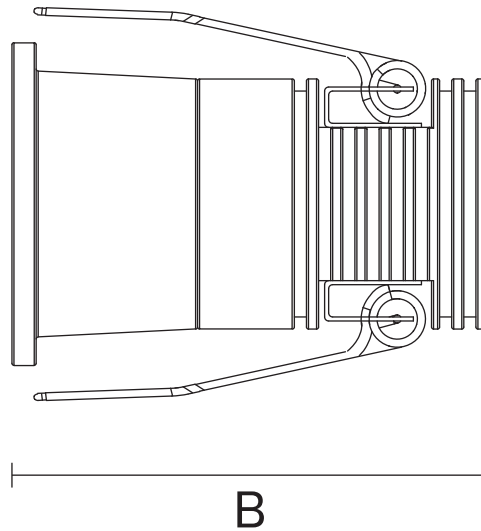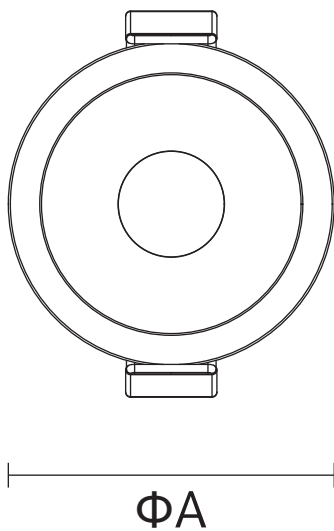



Description:

MINI LED DOWNLIGHT

Main material:


Aluminum+Pc

Specification


Aluminum lamp body integrated die-casting molding, spraying process, stable and reliable, and it is safe to use. High light transmission Pc material lamp shade, bright and not dazzling, anti-aging, long service life. IP20

Applications

- . Shopping mall
- . Office buildings
- . Exhibition hall

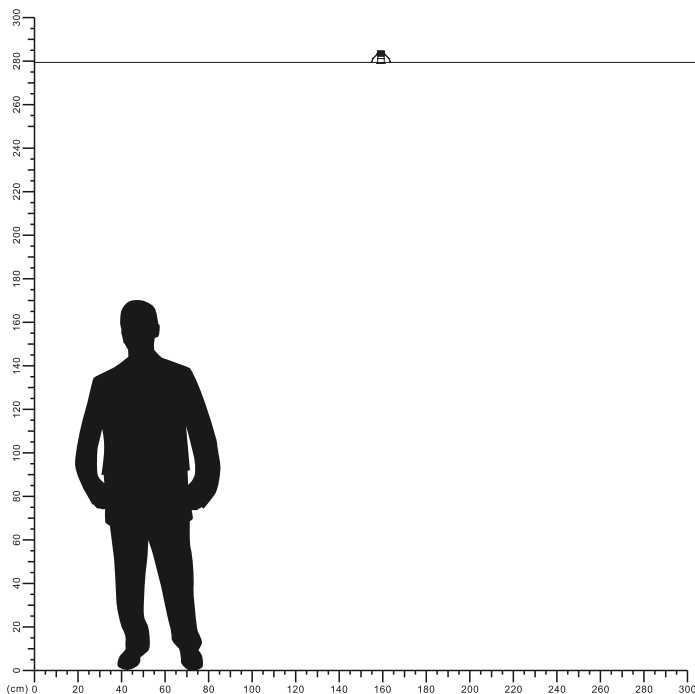


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM


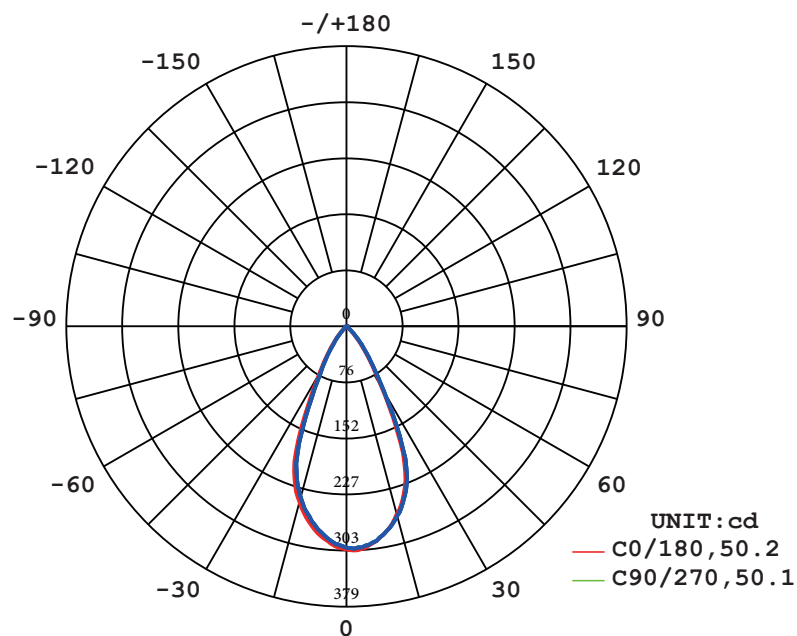


AVERAGE BEAM ANGLE (50%) : 50.2 DEG

Illuminance at a Distance

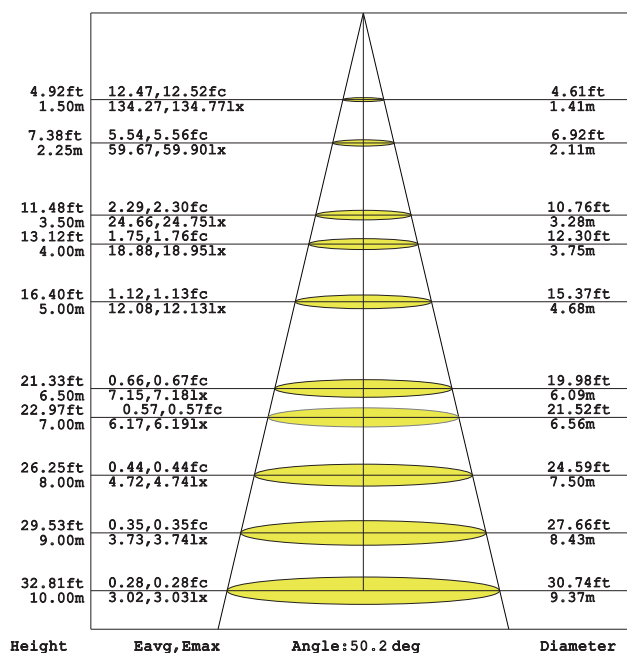


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

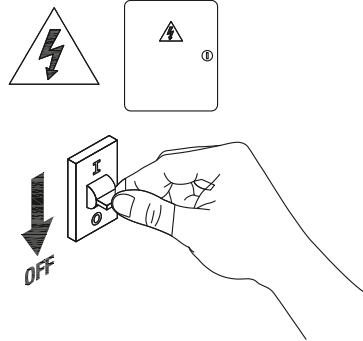


1

Turn off The Power




2

Cutting holes in and ceilings




3

Connecting the cable




4

Put the lamp in to the ceiling



5

Installation completed



6

Turn on the power

